
INCH-POUND
A-A-59326/12C
12 May 2014
SUPERSEDING
A-A-59326/12B
April 21, 2011

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

REDUCER, MALE BY FEMALE AND FEMALE BY MALE, TYPE XI

The General Services Administration has authorized the use of this commercial item description, for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

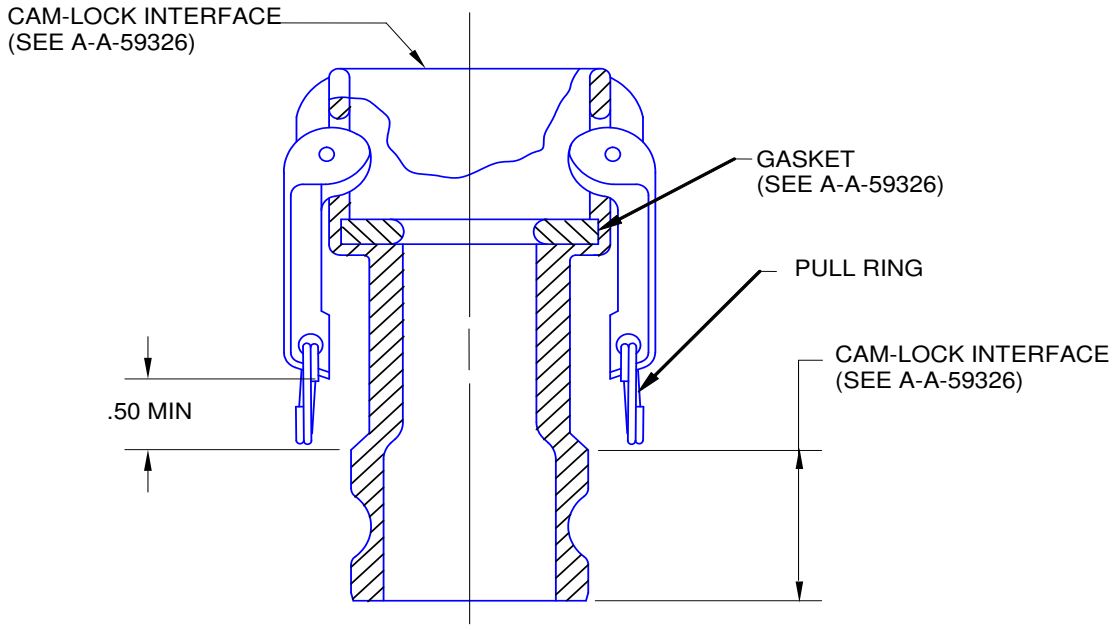

NOTES: 1. Dimensions are in inches.

FIGURE 1. Reducer.

Comments, suggestions, or questions on this document should be addressed to Tank-automotive and Armaments Command, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or emailed to usarmy.detroit.rdecom.mail.tardec-standardization@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 4730

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

1. SCOPE: This specification covers a Male by Female type XI Cam Lock Coupling Reducer.

2. CLASSIFICATION: The size of the cam lock coupling reducers is designated in table 1.

TABLE 1. Reducer size.

Dash No.	Cam-Lock Nom. Size		Gasket Reqd.	Working Pressure (psi)	Hydrostatic Test Pressure (psi)
	Female	Male			
1	4	3	-9	150	300
2	3	2	-8	150	300
3	2	1 ½	-6	150	300
4	1 ½	1	-5	150	300
5	3	4	-8	150	300
6	2	3	-6	150	300
7	1 ½	2	-5	150	300
8	1	1 ½	-3	150	300
9	4	2	-9	150	300
10	2	4	-6	150	300
11	6	4	-10	75	150
12	4	6	-9	150	225
13	6	4	-10	150	225

NOTE: Sizes are in Inches

3. SALIENT CHARACTERISTICS. The following characteristics differ from those listed in A-A-59326.

3.1 Accessories. The coupling shall be supplied with pull rings and gasket indicated.

3.2 Hydrostatic test pressure. See Table 1.

3.3 Working pressure. See Table 1.

3.4 Number of Cam Arms. The dash number 1 (one) through 12 (twelve) couplings shall have two cam arms. The dash 13 (thirteen) coupling, 6inch, 150 psi working pressure shall have 4 (four) cam arms.

4. NOTES.

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitutes a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/12

AA59326/12-4-SS-1; where /12 indicates a Male by Female reducer; -4 indicates a 1 ½ -inch Female by 1-inch Male cam locking ends; SS indicates a stainless steel body and -1 indicates a style 1 coupling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

Material: A - Aluminum Alloy
B - Copper Alloy (Brass or Bronze)
BA - Aluminum Bronze
SS - Stainless Steel

Style 1 – Style 1 couplings do not require the incorporation of a positive locking mechanism to lock the cam arms in the closed position but the cam arms shall stay in the closed position when the coupling halves are assembled.

Style 2- Style 2 couplings shall incorporate a positive locking mechanism to lock the cam arms in the closed position when the coupling halves are assembled. The locking mechanism shall be manually released (the release doesn't have to stay in the released position) before the cam arms can be moved to the open position.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force - 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FAS

Preparing Activity:
Army - AT

(Project 4730-2014-044)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.