
INCH-POUND
A-A-59326/2A
May 1, 2003
SUPERSEDING
A-A-59326/2
September 25, 1998

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

COUPLING HALF, MALE BY HOSE SHANK, TYPE II

The General Services Administration has authorized the use of this commercial item description specification sheet by all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326A.

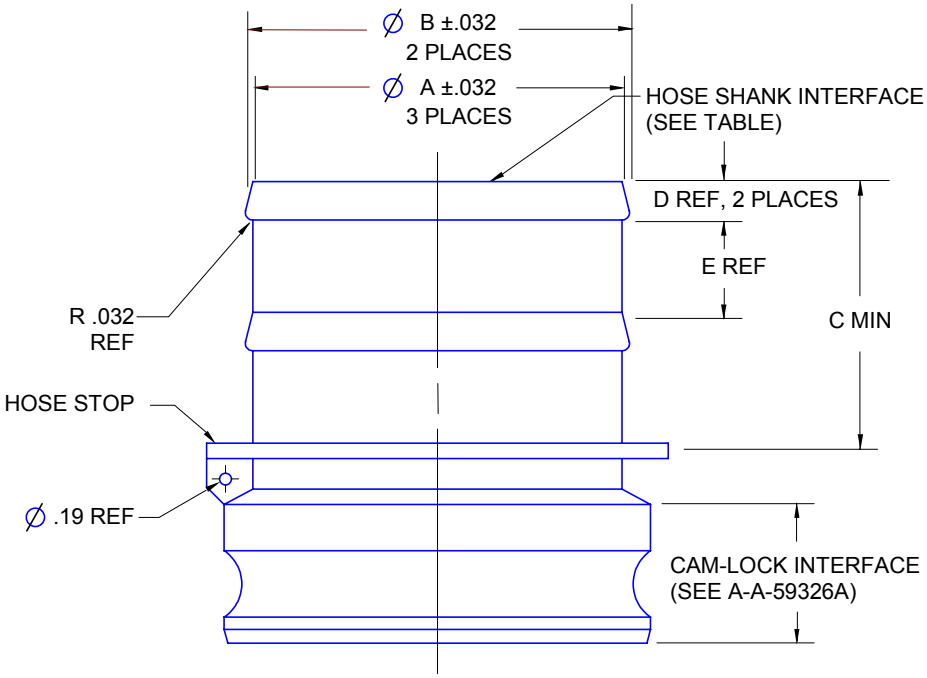

Dimensions are in inches.

FIGURE 1. 1/2 through 4-inch coupling.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: US Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-D/210, 6501 E. 11 Mile Road, Warren, MI 48397-5000.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

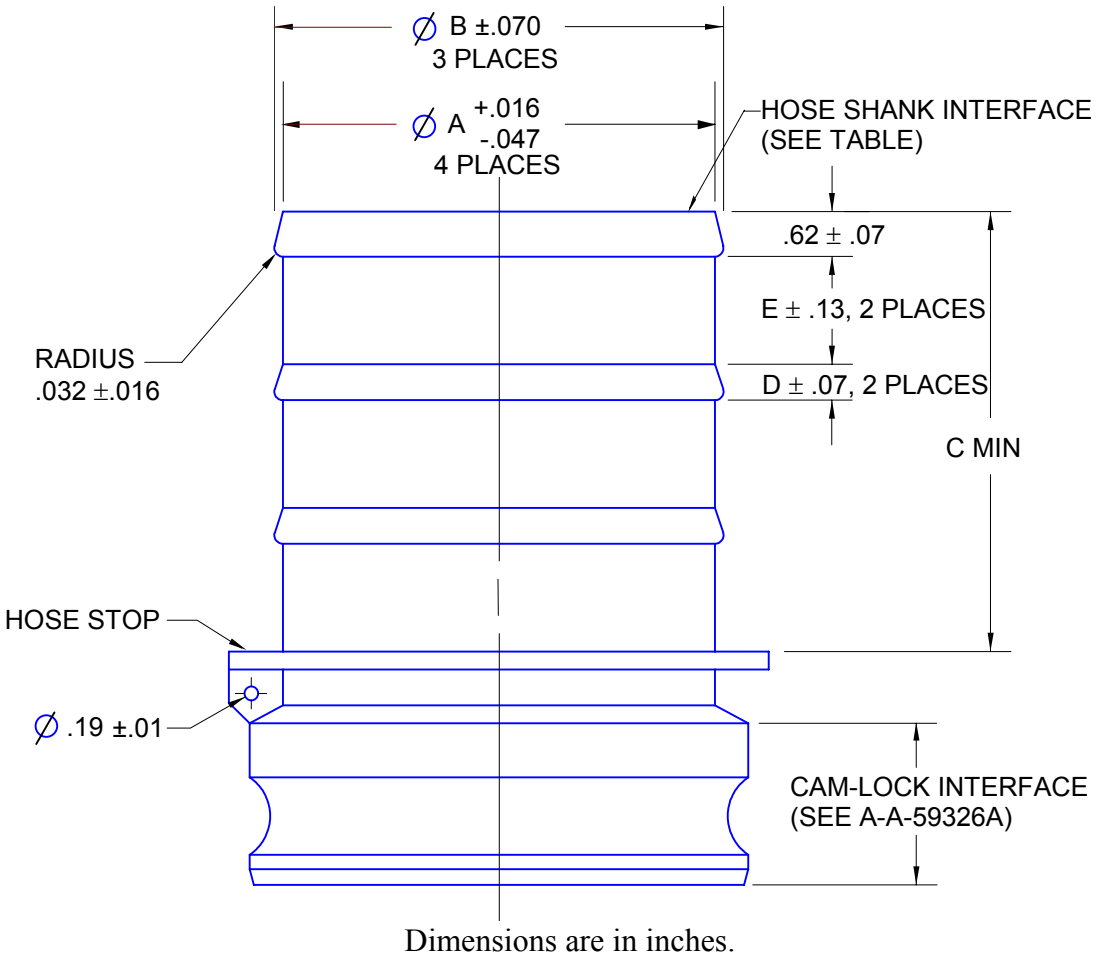


FIGURE 2. 6-inch coupling.

1. SCOPE. This specification sheet covers a male hose shank cam-locking type coupling half.
2. CLASSIFICATION. The classification will be as follows:
   a. For interpretation of geometric tolerancing symbology, see ASME Y14.5M.
   b. The size of the coupling will conform to table 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

TABLE 1. Coupling half size.

Dash No.	Cam-Lock Nom. Size	Hose Shank Dimensions				
		A	B	C	D	E
1	½	.484	.594	1.31	.19	.47
2	¾	.734	.844	2.00	.25	.75
3	1	.984	1.078	2.25	.38	.75
4	1 ¼	1.234	1.344	2.25	.38	.81
5	1 ½	1.484	1.594	2.38	.38	.81
6	2	1.969	2.094	2.75	.38	1.12
7	2 ½	2.484	2.626	3.12	.44	1.38
8	3	2.969	3.125	4.00	.50	1.56
9	4	3.969	4.125	4.25	.50	1.75
10	6	6.000	6.125	6.75	.50	1.50

3. SALIENT CHARACTERISTICS. The following characteristics differ from those listed in A-A-59326A.

3.1 Hydrostatic test pressure. The ½-inch through 6-inch couplings shall withstand a hydrostatic test pressure of 300 pounds per square inch gage (psig). The 6-inch, 75 psi rated couplings shall withstand a hydrostatic test pressure of 150 psig.

3.2 Working pressure. The ½-inch through 4-inch couplings shall be rated for 150 pounds per square inch working pressure. The 6-inch couplings shall be rated for 75 psi or 150 psi working pressure as appropriate.

4. NOTES.

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/2A.

AA59326/2A-4-B; /2A indicates a Male Hose shank Type II Coupling; -4 indicates 1 ¼ inches size; and -B indicates Brass or Bronze.

Material: A - Aluminum
B - Brass or Bronze
BA - Aluminum Bronze
SS - Stainless Steel

4.2 International standardization. Certain provisions of this specification (dimensions) are the subject of international standardization agreement (see A-A-59326A).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD1
Air Force - 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

Preparing Activity:
Army - AT

(Project 4730-2029-002)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.