INCH-POUND
A-A-59326/4A
May 1, 2003
SUPERSEDING
A-A-59326/4
September 25, 1998

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

COUPLING HALF, MALE BY FLANGE, TYPE IV (TTMA)

The General Services Administration has authorized the use of this commercial item description specification sheet, for all federal agencies

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326A.

1. SCOPE. This specification sheet covers a male cam-locking type coupling half to be used in conjunction with coupling halves having a flanged end.

2. CLASSIFICATION. The size of the coupling halves is designated in table 1.

TABLE 1. Coupling half size.

Dash No.	Cam-Lock Nom. Size	Flange Nom. Size	Dim. C
1	2	2	2.875
2	2 ½	2 ½	2.875
3	3	3	2.875
4	4	4	2.875
5	6	6	3.125
6	2	4	2.875
7	1	2	2.875
8	2	3	2.875
9	3	4	2.875
Sizes are in inches			

3. SALIENT CHARACTERISTICS. The following characteristics differ from those listed in A-A-59326A.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: US Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-D/210, 6501 E. 11 Mile Road, Warren, MI 48397-5000.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

3.1 Hydrostatic test pressure. The ½-inch through 6-inch couplings shall withstand a hydrostatic test pressure of 300 pounds per square inch gage (psig). The 6-inch, 75 psi rated couplings shall withstand a hydrostatic test pressure of 150 psig.

3.2 Working pressure. The ½-inch through 4-inch couplings shall be rated for 150 pounds per square inch working pressure. The 6-inch couplings shall be rated for 75 psi or 150 psi working pressure as appropriate.

3.3 Flange. The flange shall conform to TTMA specifications.

4. NOTES.


4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/4A

AA59326/4A-4-SS; /4A indicates a Male Flange Type IV Coupling Half; -4 indicates a 4-inch nominal cam lock end; and SS indicates a stainless steel body.

Material: A - Aluminum
B - Copper Alloy (Brass or Bronze)
BA - Aluminum Bronze
SS - Stainless Steel

4.2 International standardization. Certain provisions of this specification (dimensions) are the subject of international standardization (see A-A-59326A).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

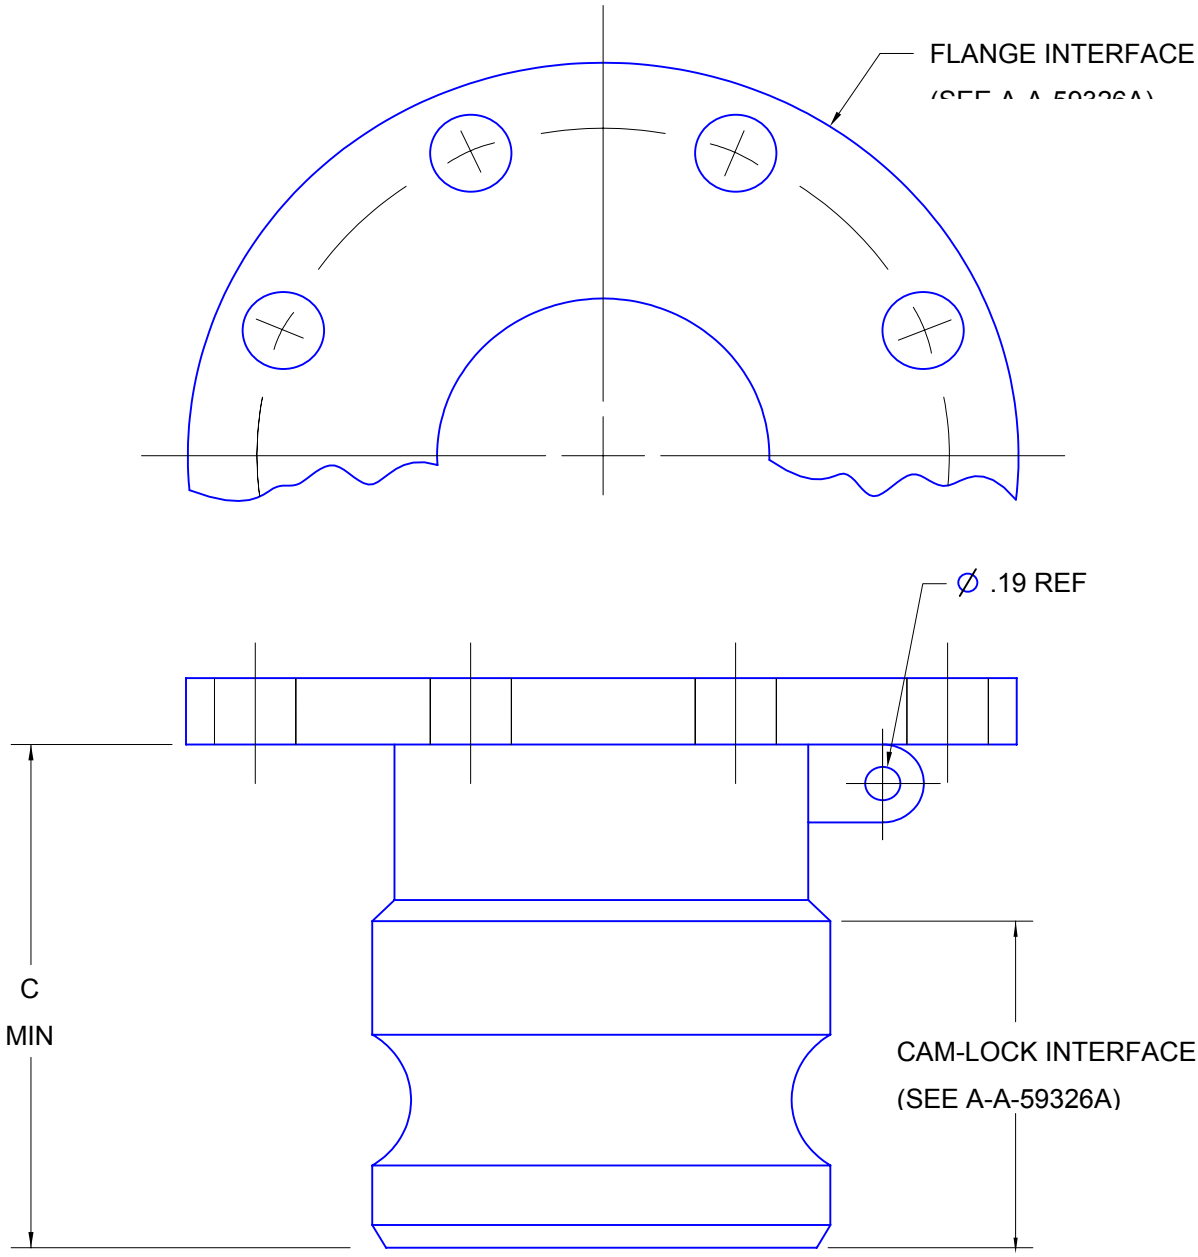

NOTES: 1. For interpretation of geometric tolerancing symbology, see ASME Y14.5M.
2. The size of the coupling shall conform to table 1.
3. Dimensions are in inches.

FIGURE 1. Coupling half.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

A-A-59364/4A

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force - 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

Preparing Activity:
Army - AT

(Project 4730-2029-004)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.