INCH-POUND
A-A-59326/6B
September 12, 2005
SUPERSEDING
A-A-59326/6A
May 1, 2003

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

COUPLING HALF, FEMALE BY HOSE SHANK, TYPE VI

The General Services Administration has authorized the use of this commercial item description, for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

1. SCOPE: This specification covers a Female by Hose Shank, Type VI Coupling Half.

2. CLASSIFICATION: The size of the coupling halves is designated in table I.

TABLE I. Coupling half size.
Sizes are in Inches

Dash No.	Cam-Lock Nom. Size	Hose Shank Dimensions					Gasket Reqd
		A	B	C	D	E	
1	½	.484	.594	1.50	.19	.50	-1
2	¾	.734	.844	2.00	.25	.75	-2
3	1	.984	1.078	2.25	.38	.75	-3
4	1 ¼	1.234	1.344	2.37	.38	.81	-4
5	1 ½	1.484	1.594	2.37	.38	.81	-5
6	2	1.969	2.094	3.00	.38	1.12	-6
7	2 ½	2.484	2.626	3.12	.44	1.38	-7
8	3	2.969	3.125	4.00	.50	1.50	-8
9	4	3.969	4.125	4.25	.50	1.62	-9
10	6	6.000	6.125	6.50	.50	1.62	-10

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: US Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-D/210, 6501 E. 11 Mile Road Warren, MI 48397-5000.

AMSC N/A FSC 4730

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

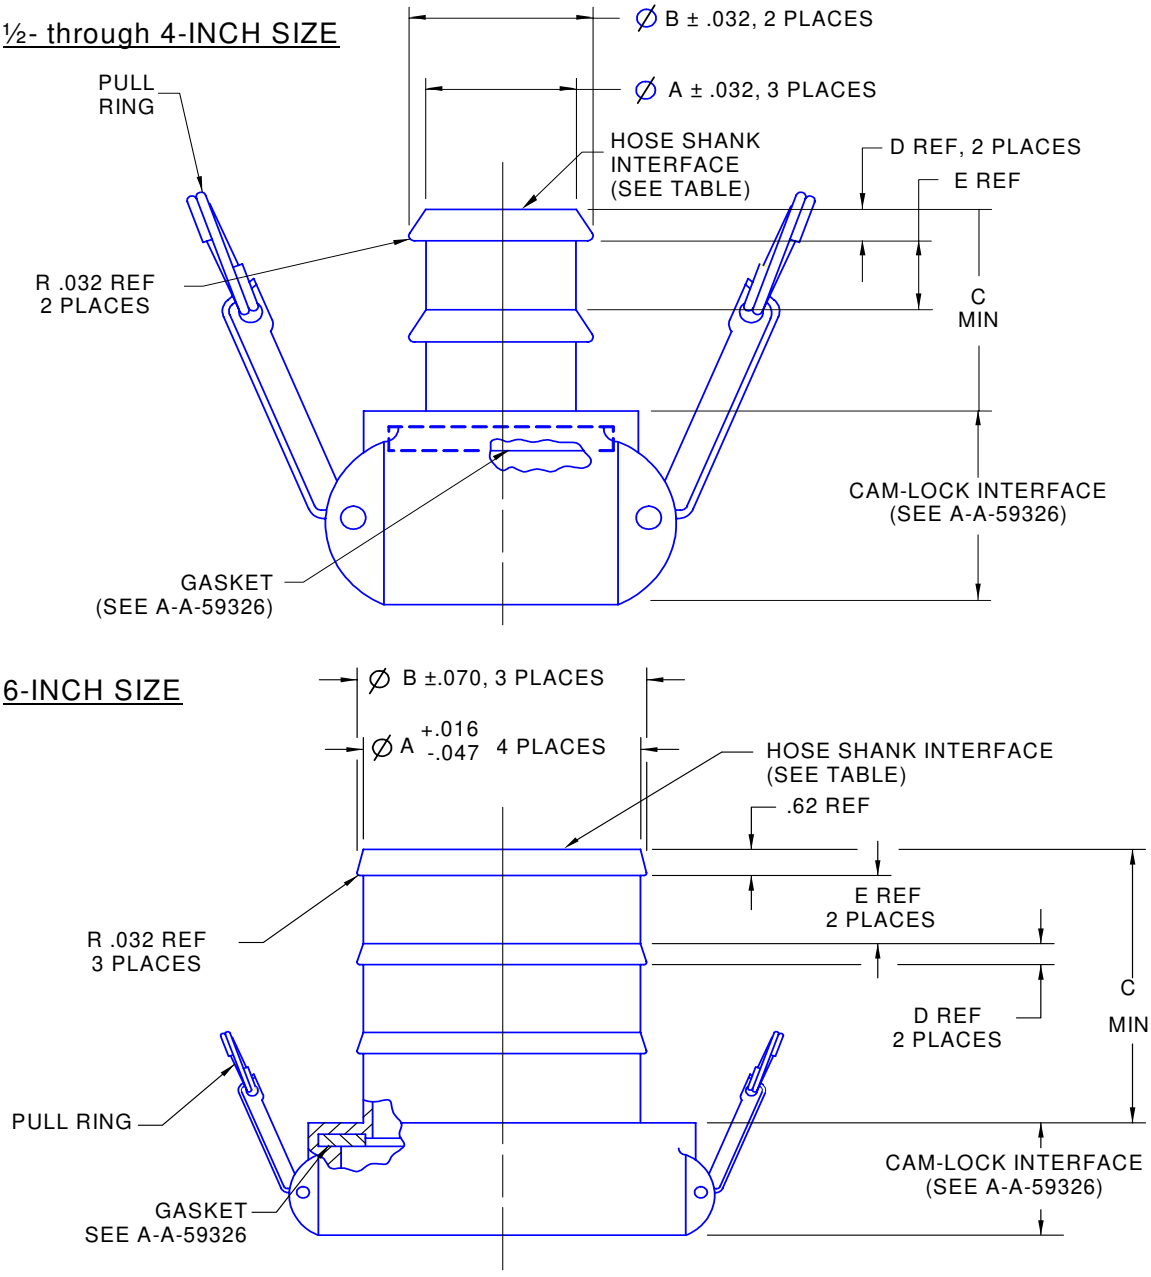

NOTES: 1. For interpretation of geometric tolerancing symbology, see ASME Y14.5M.
2. The size of the coupling shall conform to table 1.
3. Dimensions are in inches.

FIGURE 1. Coupling half.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS. The following characteristics differ from those listed in A-A-59326.

3.1 Hydrostatic test pressure. The ½-inch through 6-inch couplings shall withstand a hydrostatic test pressure of 300 pounds per square inch gage (psig). The 6-inch, 75 psi rated couplings shall withstand a hydrostatic test pressure of 150 psig.

3.2 Working Pressure. The ½-inch through 4-inch couplings shall be rated for 150 pounds per square inch working pressure. The 6-inch couplings shall be rated for 75 psi or 150 psi working pressure as appropriate.

3.3 Accessories. The coupling shall be supplied with pull rings and gasket indicated.

3.4 Hose Shank. The minimum number of hose serrations on the hose shank shall be as shown in Figure 1. Dimensions B, D, and E in Table 1 define the diameter and location of the required hose serrations. Additional serrations are allowable. When additional serrations are used on the hose shank, all of the dimensions in Table 1 shall still be met. Additional serrations shall not exceed the diameter shown in Table 2.

TABLE II Additional Hose Serration Diameter

Dimensions are in inches

Dash No.	Size	Maximum Serration Diameter
2	¾	0.796
3	1	1.046
4	1 ¼	1.312
5	1 ½	1.531
6	2	2.031
7	2 ½	2.562
8	3	3.062
9	4	4.062
10	6	6.094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

4. NOTES.

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/6B.

AA59326/6B-3-SS-1; /6B indicates a Female by Hose Shank Coupling Half, Type VI; -3 indicates a 1-inch nominal size; SS indicates a stainless steel body; and -1 indicates a style 1 coupling.

Material: A-Aluminum
B- Copper Alloy (Brass or Bronze)
BA – Aluminum Bronze
SS – Stainless Steel

Style 1 – Style 1 couplings do not require the incorporation of a positive locking mechanism to lock the cam arms in the closed position but the cam arms shall stay in the closed position when the coupling halves are assembled.

Style 2- Style 2 couplings shall incorporate a positive locking mechanism to lock the cam arms in the closed position when the coupling halves are assembled. The locking mechanism shall be manually released (the release doesn't have to stay in the released position) before the cam arms can be moved to the open position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force – 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

Preparing Activity:
Army - AT

(Project 4730-2005-073)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.