INCH-POUND
A-A-59326/6C
April 20, 2011
SUPERSEDING
A-A-59326/6B
September 12, 2005

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

COUPLING HALF, FEMALE BY HOSE SHANK, TYPE VI

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

1. SCOPE. This specification sheet covers a Female by Hose Shank, Type VI Coupling Half.

2. CLASSIFICATION. The size of the coupling half is designated in table I.

TABLE I. Coupling half size.

Dash No.	Cam-Lock Nom. Size	Hose Shank Dimensions					Gasket Reqd
		A	B	C	D	E	
1	½	.484	.594	1.50	.19	.50	-1
2	¾	.734	.844	2.00	.25	.75	-2
3	1	.984	1.078	2.25	.38	.75	-3
4	1 ¼	1.234	1.344	2.37	.38	.81	-4
5	1 ½	1.484	1.594	2.37	.38	.81	-5
6	2	1.969	2.094	3.00	.38	1.12	-6
7	2 ½	2.484	2.626	3.12	.44	1.38	-7
8	3	2.969	3.125	4.00	.50	1.50	-8
9	4	3.969	4.125	4.25	.50	1.62	-9
10	6	6.000	6.125	6.50	.50	1.62	-10


NOTE: Sizes are in inches.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to DAMI_STANDARDIZATION@conus.army.mil or U.S. Army RDECOM, Tank Automotive Research, Development and Engineering Center, ATTN: RDTA-EN/STND/TRANS MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.daps.dla.mil.

AMSC N/A FSC 4730

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

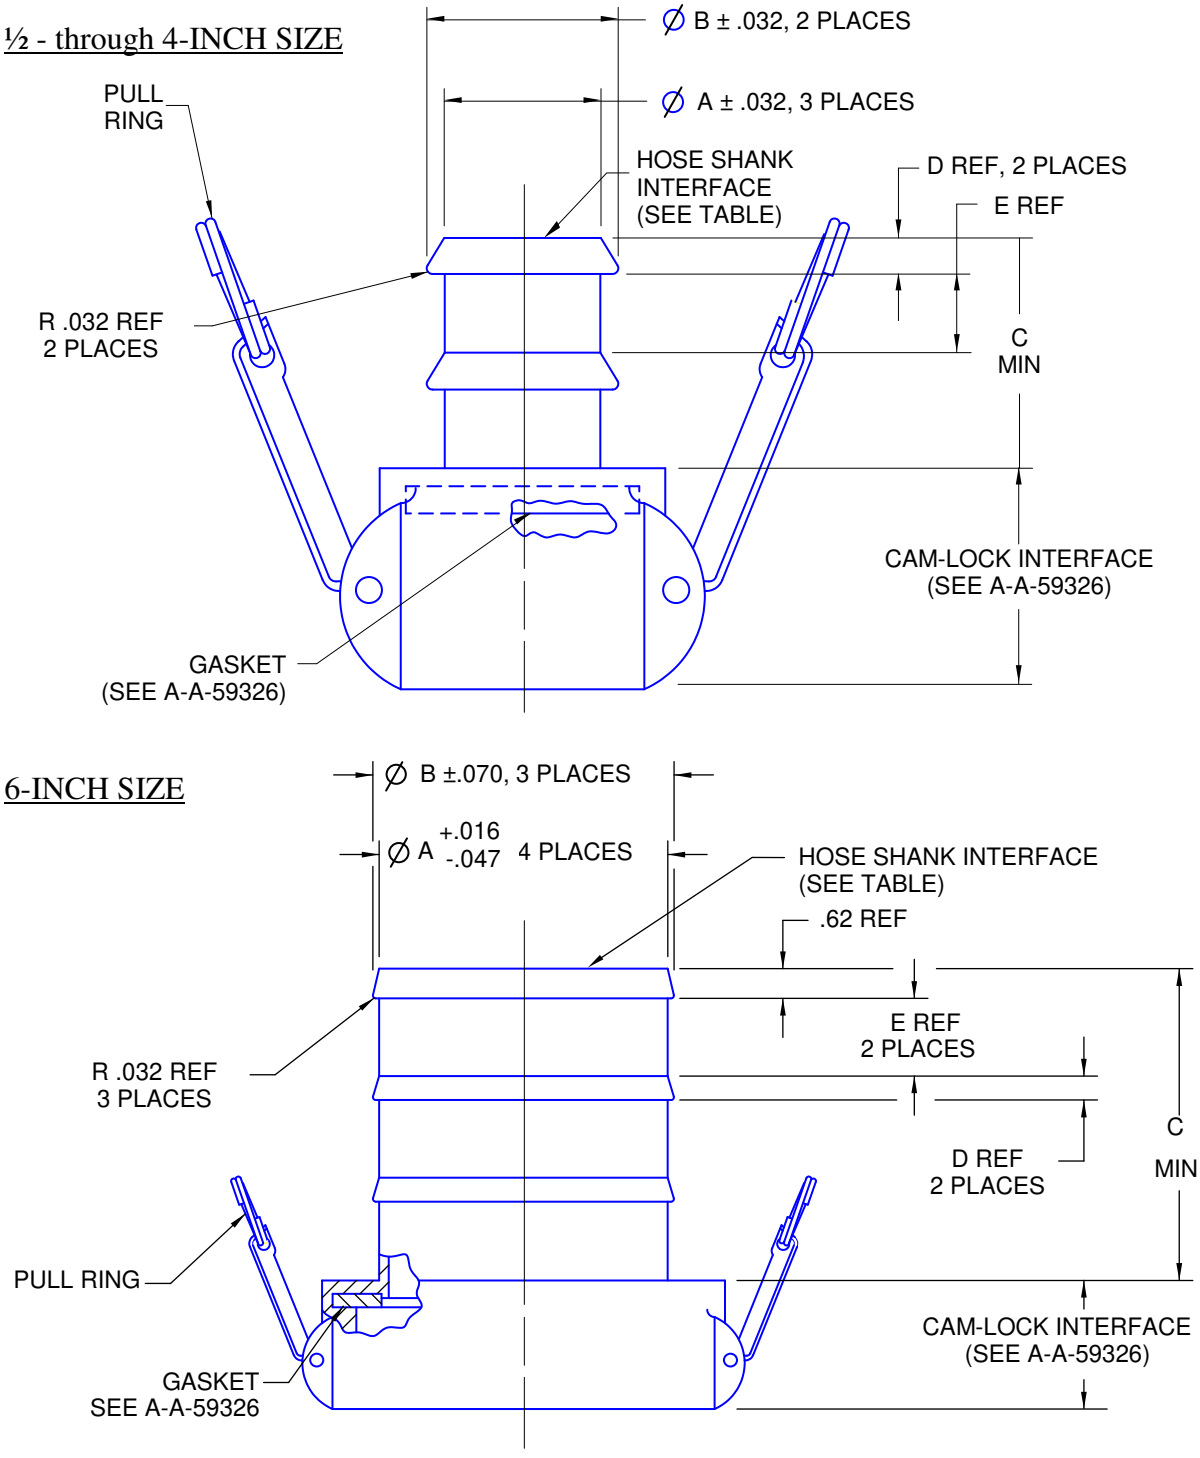

NOTES: 1. For interpretation of dimensioning and tolerancing, see ASME Y14.5M.
2. The size of the coupling shall conform to table I.
3. Dimensions are in inches.

FIGURE 1. Coupling half.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS. The following characteristics may differ from those listed in the latest issue of A-A-59326.

3.1 Hydrostatic test pressure. The ½-inch through 4-inch couplings shall withstand a hydrostatic test pressure of 300 pounds per square inch gage (psig). The 6-inch, 75 psi rated couplings shall withstand a hydrostatic test pressure of 150 psig. The 6-inch, 150 psi rated couplings shall withstand a hydrostatic test pressure of 225 psig.

3.2 Cam-arms. The 6-inch 150 psi rated coupling half shall have four (4) cam-arms. The 6-inch 75 psi rated can have 2 cam-arms.

3.3 Working Pressure. The ½-inch through 4-inch couplings shall be rated for 150 pounds per square inch working pressure. The 6-inch couplings shall be rated for 75 psi or 150 psi working pressure as appropriate.

3.4 Accessories. The coupling shall be supplied with pull rings and gasket indicated.

4. NOTES

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/6.

AA59326/6-3-SS-1; where /6 indicates a Female by Hose Shank, Type VI coupling half; -3 indicates a 1-inch nominal size; -SS indicates a stainless steel body; and last -1 indicates a style 1 coupling.

Material: A - Aluminum Alloy
B - Copper Alloy (Brass or Bronze)
BA - Aluminum Bronze
SS - Stainless Steel

Style 1 - Style 1 couplings do not require the incorporation of a positive locking mechanism to lock the cam arms in the closed position but the cam arms shall stay in the closed position when the coupling halves are assembled.

Style 2 - Style 2 couplings shall incorporate a positive locking mechanism to lock the cam arms in the closed position when the coupling halves are assembled. The locking mechanism shall be manually released (the release doesn't have to stay in the released position) before the cam arms can be moved to the open position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force - 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FAS

Preparing Activity:
Army - AT

(Project 4730-2011-018)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.