INCH-POUND
A-A-59326/8C
12 May 2014
SUPERSEDING
A-A-59326/8B
April 20, 2011

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

COUPLING HALF, FEMALE BY FLANGE, TYPE VIII (TTMA)

The General Services Administration has authorized the use of this commercial item description, for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

1. SCOPE: This specification covers a Female by Flange Coupling Half Type VIII (TTMA) to be used in conjunction with a Male Cam Lock Type Coupling.

2. CLASSIFICATION: The size of the coupling halves is designated in Table 1.

TABLE 1. Coupling half size

Dash No.	Cam-Lock Nom. Size	Flange Nom. Size	Dimension C	Gasket Reqd.	Working Pressure (psi)	Hydrostatic Test Pressure (psi)
1	2	2	5.25	-6	150	300
2	2 ½	2 ½		-7	150	300
3	3	3		-8	150	300
4	4	4		-9	150	300
5	6	6	6.125	-10	75	150
6	2	4	5.25	-6	150	300
7	1	2		-3	150	300
8	2	3		-6	150	300
9	3	4		-8	150	300
10	6	6	6.125	-10	150	225

NOTE: Sizes are in Inches.

Comments, suggestions, or questions on this document should be addressed to Tank-automotive and Armaments Command, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or emailed to usarmy.detroit.rdecom.mail.tardec-standardization@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil

AMSC N/A FSC 4730

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

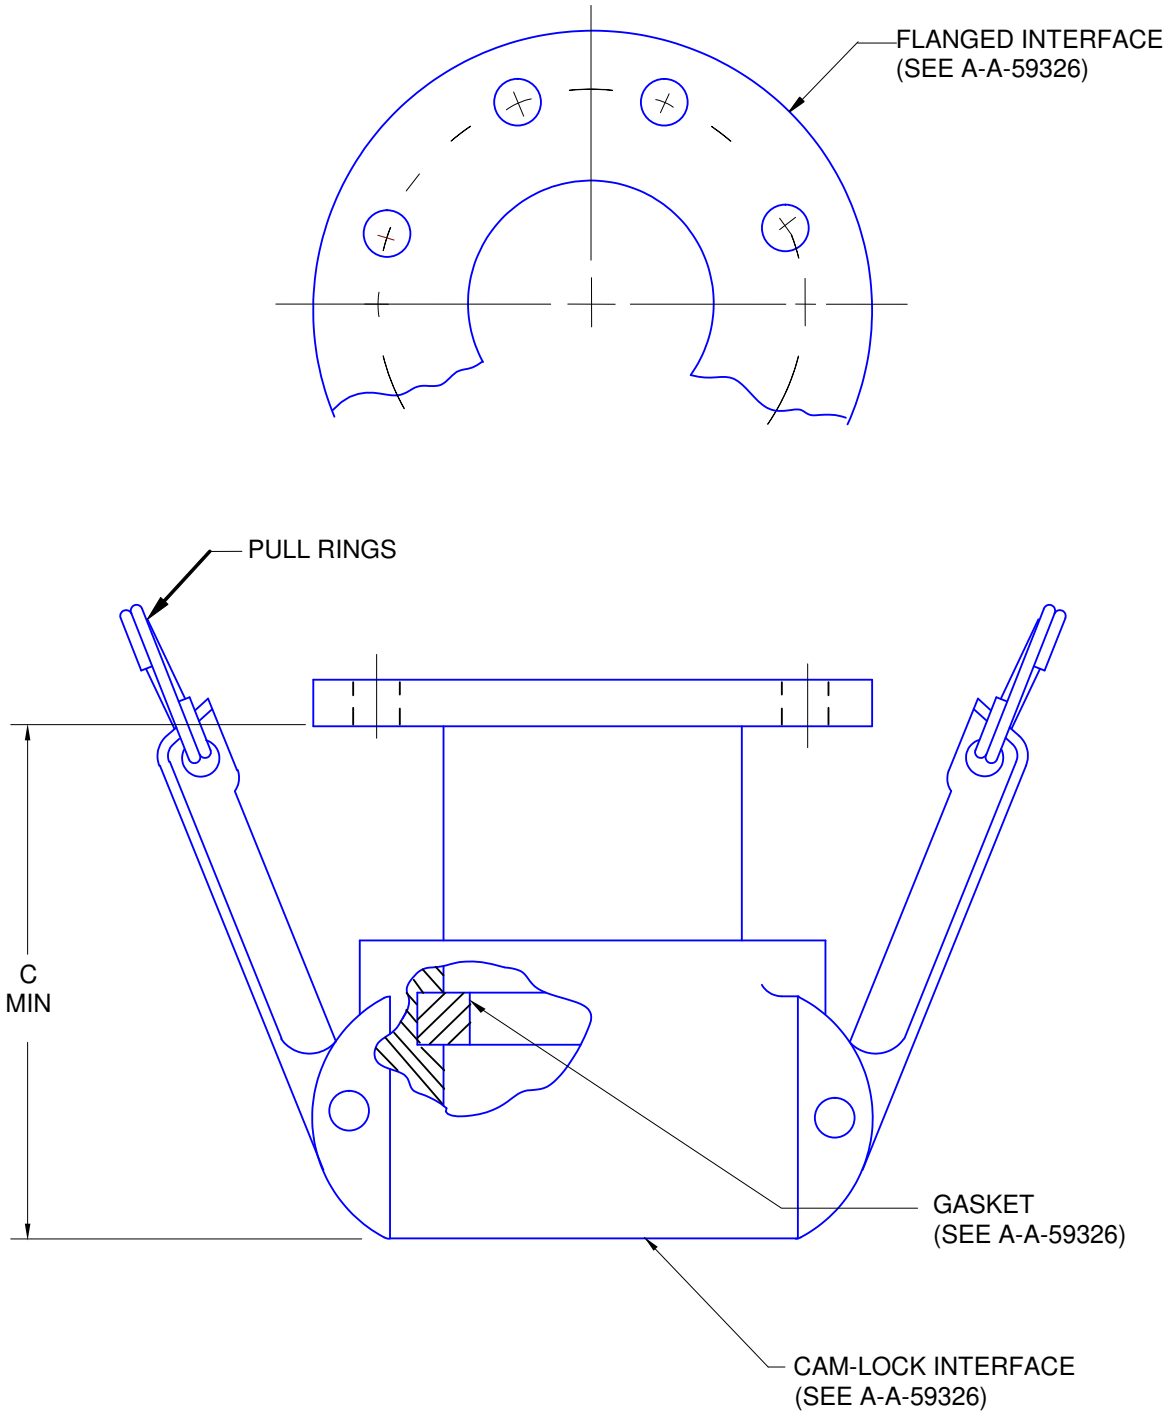


FIGURE 1. Coupling Half

TTMA – Truck Trailer Manufacturers Association

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS. The following characteristics differ from those listed in A-A-59326.

3.1 Hydrostatic test pressure. See Table 1.

3.2 Working pressure. See Table 1.

3.3 Number of Cam Arms. The dash number 1 (one) through 9 (nine) couplings (see Table 1) shall have two cam arms. The dash 10 (ten) coupling, 6-inch, 150 psi working pressure (see Table 1) shall have 4 (four) cam arms.

3.4 Accessories. The coupling shall be supplied with pull rings and gasket indicated.

4. NOTES.

4.1. Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for a specification sheet A-A-59326/8

AA59326/8-3-SS-1; where /8 indicates a Female by Flange Type VIII (TTMA) Coupling Half; -3 indicates a 3-inch nominal cam lock end; SS indicates a stainless steel body; and -1 indicates a style 1 coupling.

Material: A – Aluminum Alloy
B- Copper Alloy (Brass or Bronze)
BA – Aluminum Bronze
SS – Stainless Steel

Style 1 - Style 1 couplings do not require the incorporation of a positive locking mechanism to lock the cam arms in the closed position but the cam arms shall stay in the closed position when the coupling halves are assembled.

Style 2- Style 2 couplings shall incorporate a positive locking mechanism to lock the cam arms in the closed position when the coupling halves are assembled. The locking mechanism shall be manually released (the release doesn't have to stay in the released position) before the cam arms can be moved to the open position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians
Army - AT
Navy - YD
Air Force - 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FAS

Preparing Activity:
Army - AT

(Project 4730-2014-043)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.