
FED. SUP CLASS
1680

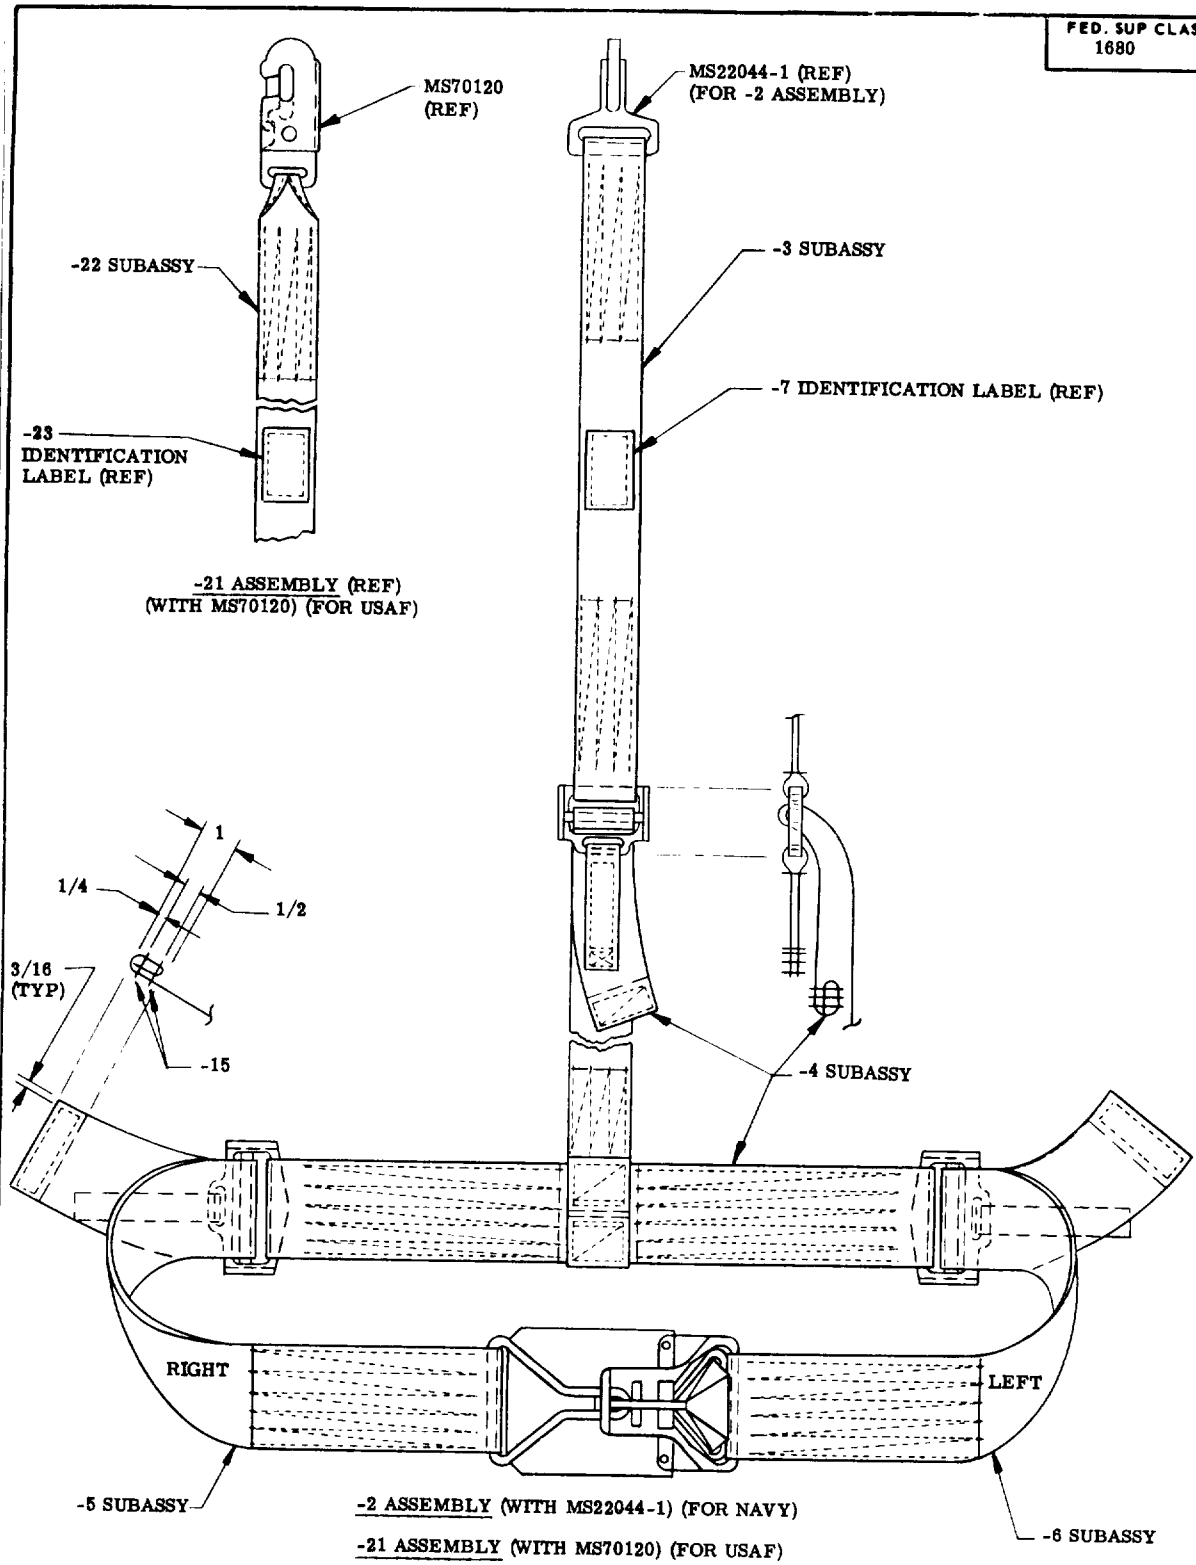

-2 ASSEMBLY (WITH MS22044-1) (FOR NAVY)

-21 ASSEMBLY (WITH MS70120) (FOR USAF)

(FOR NOTES SEE SHEET 5)

(E) STANDARD REVISED AND REDRAWN

APPROVED 11 APR 55 REVISED (E) 20 APRIL 1981

REVIEWER SYMBOLS: USER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust USAF - 99	TITLE BELT, AIRCRAFT SAFETY, CREWMAN'S	MILITARY STANDARD MS16070
PROCUREMENT SPECIFICATION MIL-R-81729 (AS)	SUPERSEDES: MS16070(AER) & NAVAIR 60A135E1	SHEET 1 OF 5

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


PLATE NO 21065

PROJECT NO. 1680-N480

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:53Z
Check the source to verify that this is the current version before use.


USER SYMBOLS:
REVIEWER SYMBOLS:
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

FED. SUP CLASS 1680

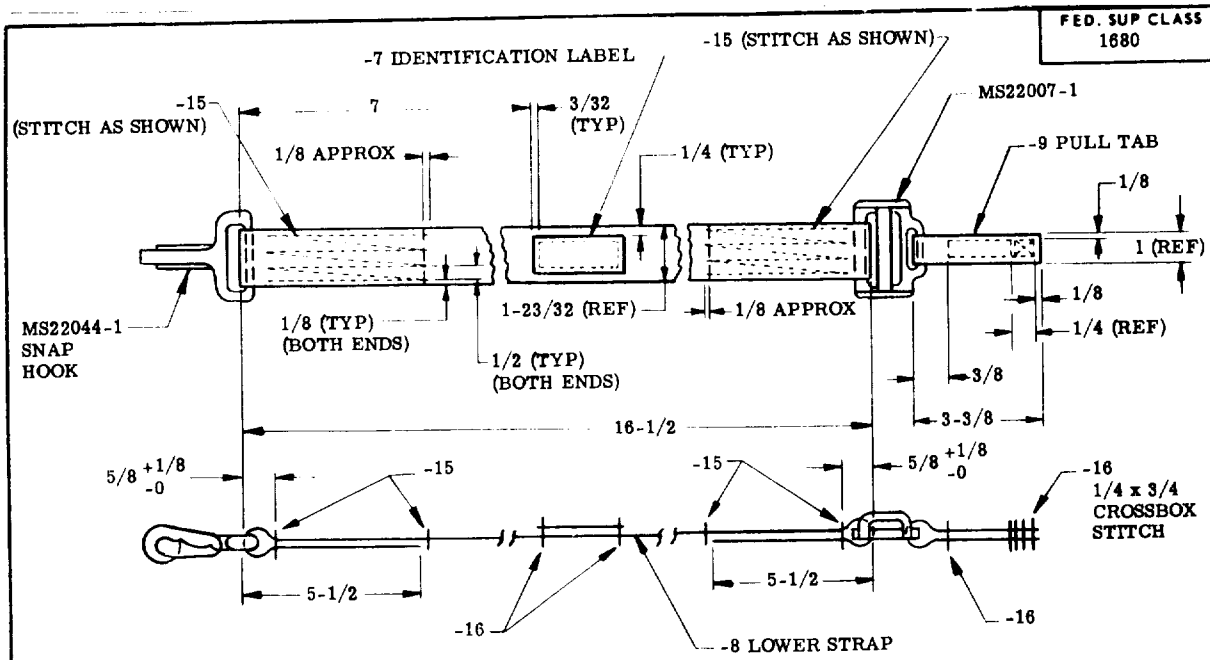


-3 SUBASSY

MATERIAL: FOR -8 NYLON WEBBING CONFORMING TO MIL-W-27265, TYPE XIII, CL. R
FOR -9 NYLON WEBBING CONFORMING TO MIL-W-4088, TYPE II; AS AN OPTION USE MIL-T-5038, TYPE II OR IV.

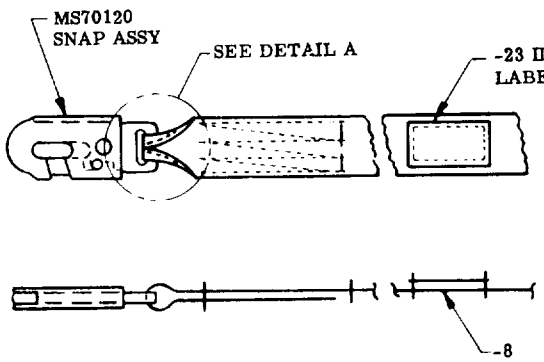


-22 SUBASSY
FOR INFO NOT SHOWN SEE -3 SUBASSY
MATERIAL: FOR -8, FOR -9 — SAME AS ABOVE

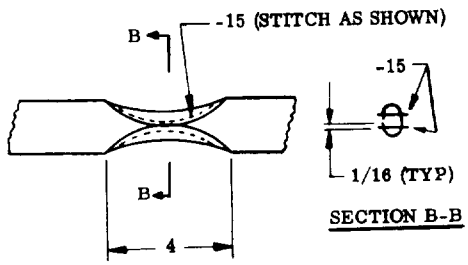

DETAIL A

SECTION B-B

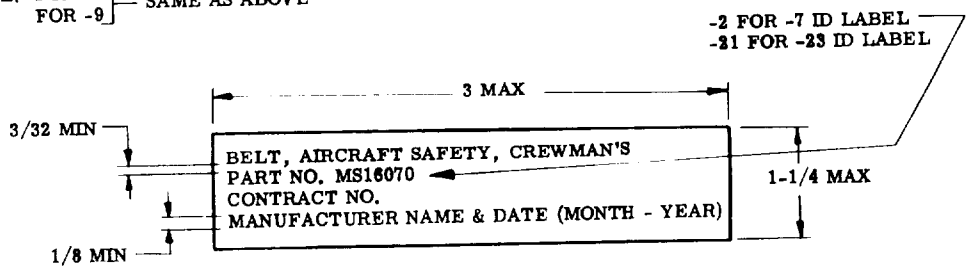

-7 & -23 IDENTIFICATION LABEL
LABEL SHALL BE IN ACCORDANCE WITH FEDERAL SPEC DDD-L-20, TYPE II, CLASS 11 (ELEVEN)

APPROVED 11 APR 55 REVISED (E) FOR CHANGES SEE SHEETS 1 THRU 5

P.A. NAVY - AS Other Cust USAF - 99	TITLE BELT, AIRCRAFT SAFETY, CREWMAN'S	MILITARY STANDARD MS16070
PROCUREMENT SPECIFICATION MIL-R-81729(AS)	SUPERSEDES: MS16070(AER) & NAVAIR 60A135E1	SHEET 2 OF 5


DD FORM MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO 23065

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:53Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1680

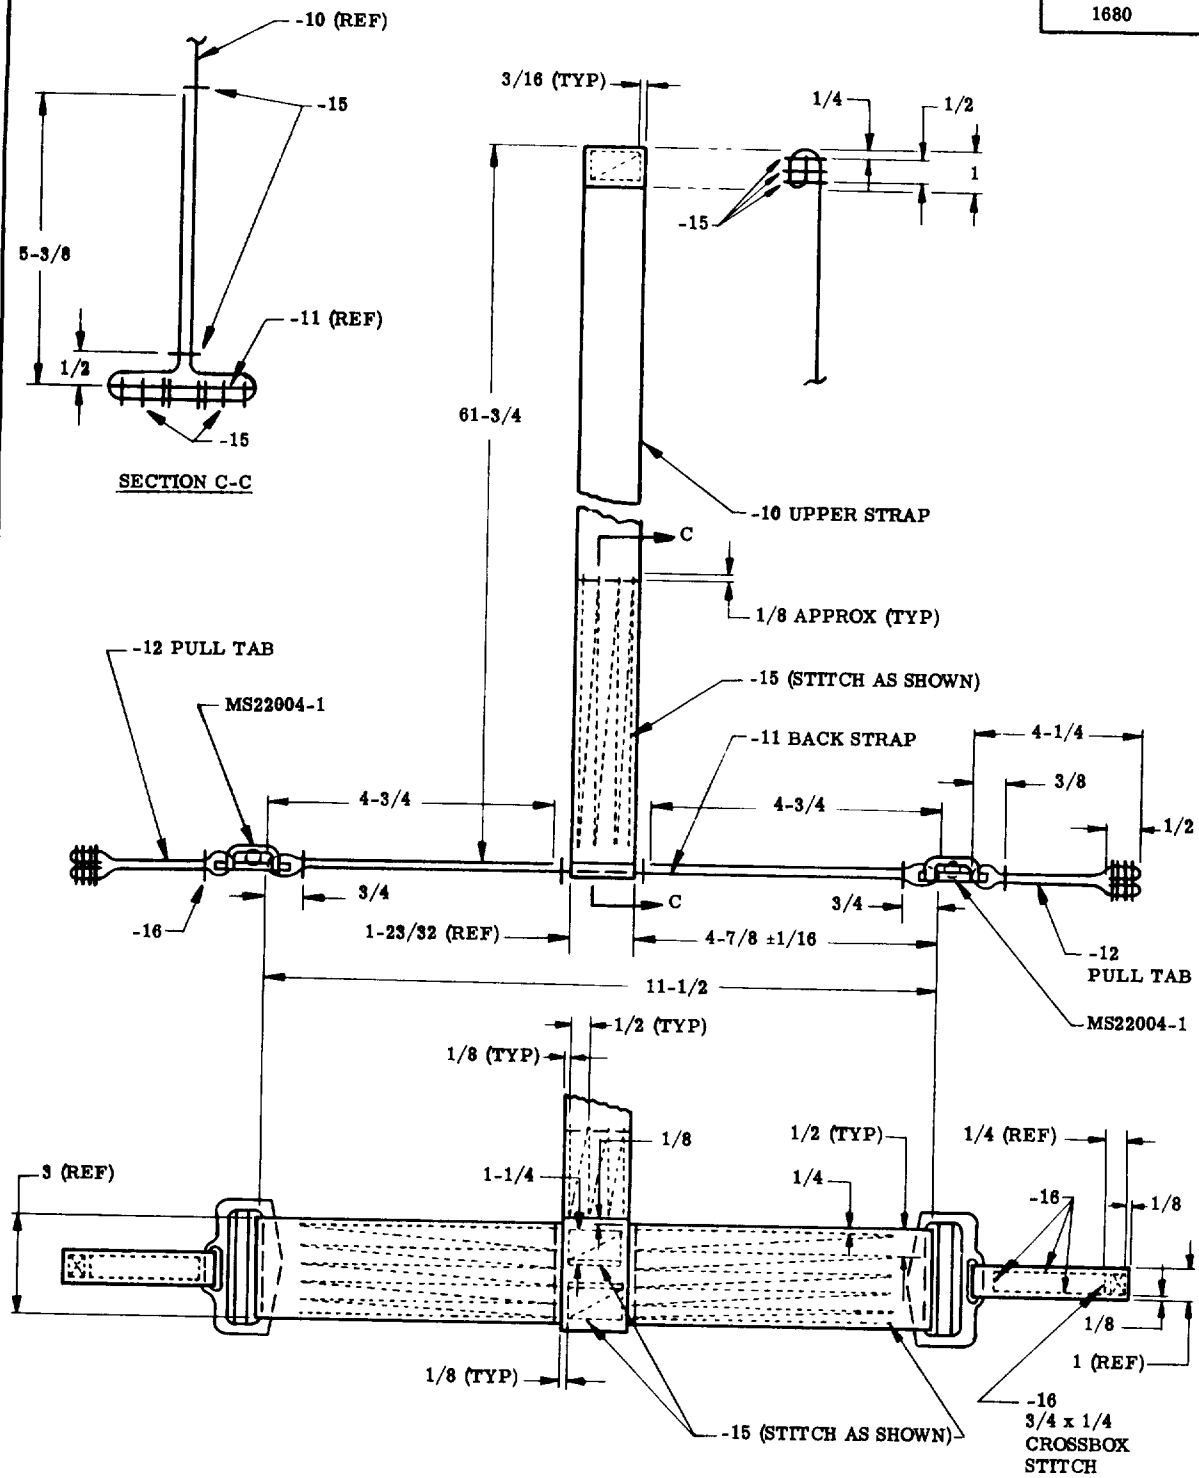

-4 SUBASSY

MATERIAL: FOR -10 NYLON WEBBING CONFORMING TO MIL-W-27265, TYPE XIII, CL. R.
FOR -11 NYLON WEBBING CONFORMING TO MIL-W-4088, TYPE IX.
FOR -12 NYLON WEBBING CONFORMING TO MIL-W-4088, TYPE II.

APPROVED 11 APR 55 REVISED (E) FOR CHANGES SEE SHEETS 1 THRU 5

P.A. NAVY - AS Other Cust USAF - 99	TITLE BELT, AIRCRAFT SAFETY, CREWMAN'S	MILITARY STANDARD MS16070
PROCUREMENT SPECIFICATION MIL-R-81729(AS)	SUPERSEDES: MS16070(AER) & NAVAIR 60A135E1	SHEET 3 OF 5

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO. 21065

USER SYMBOLS:


REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."


This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:53Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1680

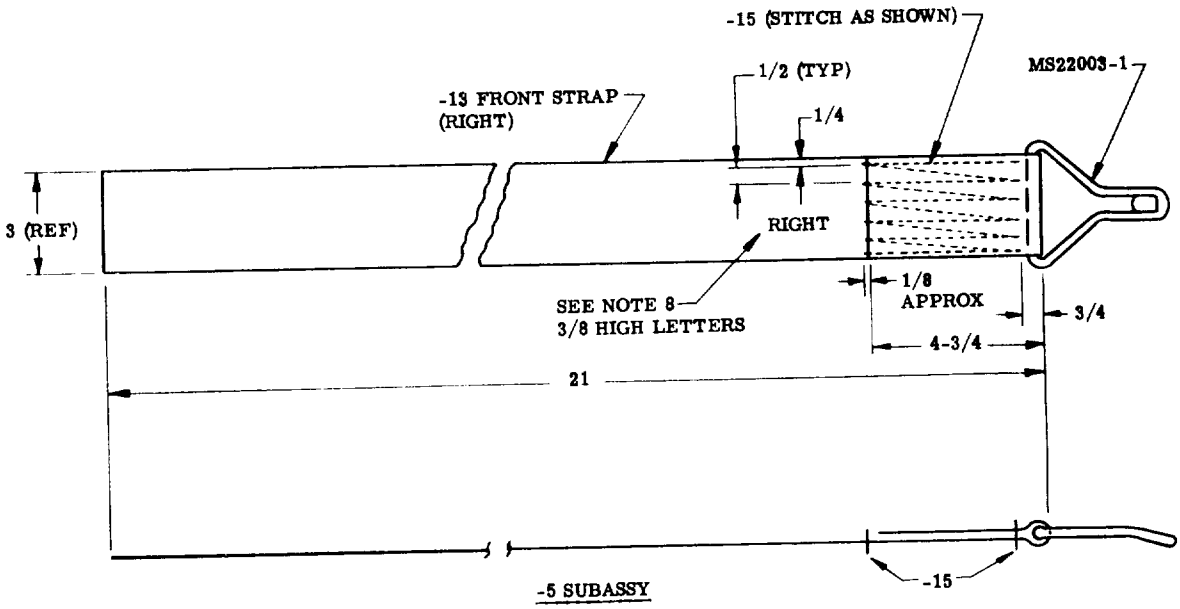

-5 SUBASSY

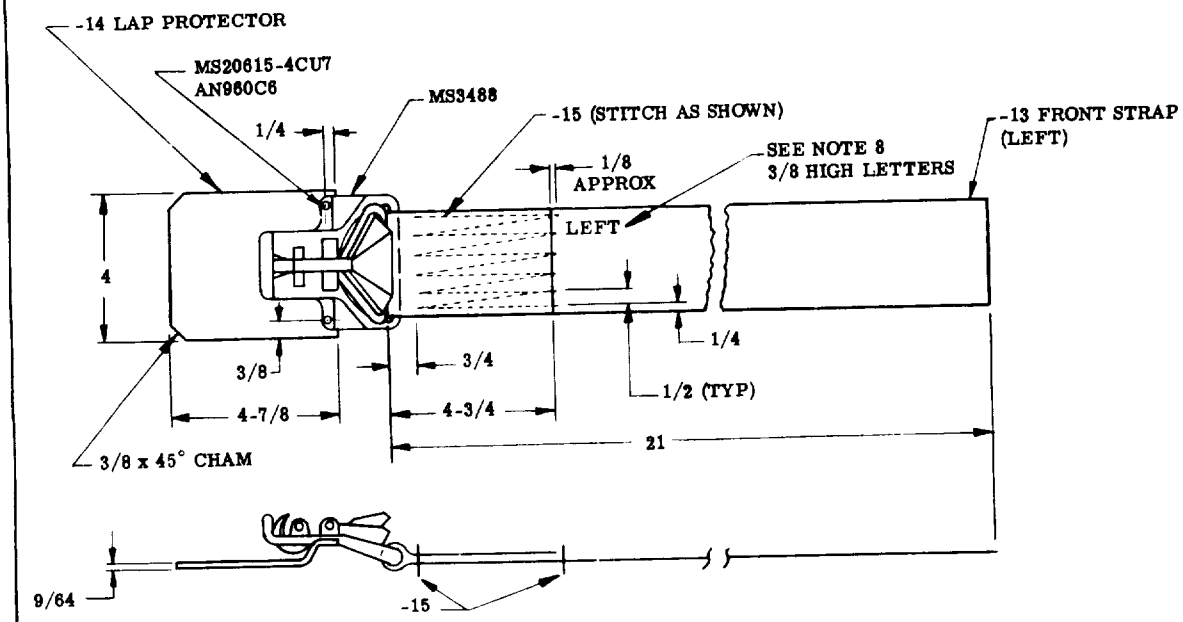

-6 SUBASSY

MATERIAL: FOR -13 NYLON WEBBING CONFORMING TO MIL-W-4088, TYPE IX.
FOR -14 LEATHER CONFORMING TO KK-L-271, CL 3 OR 4, SEL. C, AND SHALL BE FUNGUS PROOFED WITH A 0.25 ±.05 PER CENTER PARA - NITROPHENOL BASED ON DRY WEIGHT OF THE LEATHER. COLOR: RUSSET.

APPROVED 11 APR 55 REVISED (E) FOR CHANGES SEE SHEETS 1 THRU 5

P.A. NAVY - AS Other Cust USAF - 99	TITLE: BELT, AIRCRAFT SAFETY, CREWMAN'S	MILITARY STANDARD MS16070
PROCUREMENT SPECIFICATION MIL-R-81729(AS)	SUPERSEDES MS16070(AER) & NAVAIR 60A135E1	SHEET 4 OF 5

PLATE NO 23065

DD FORM MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Section for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:53Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1680

NOTES:

1. MATERIAL SHALL BE AS SPECIFIED FOR APPLICABLE PART NO., EXCEPT -15 (CORD) TO BE NYLON, V-T-295, TYPE I, CLASS B, SIZE NO. 6; AND -16 (THREAD) TO BE NYLON, V-T-295, TYPE I, CLASS B, SIZE E. AS AN OPTION -15 AND -16 MAY BE TYPE II. (SEE NOTES 2 AND 3.)
2. ALL MACHINE STITCHING SHALL BE IN ACCORDANCE WITH FED STD 751, STITCH TYPE 301. FOR -15 (CORD) 4 TO 6 STITCHES PER INCH (SEE NOTE 1); FOR -16 (THREAD) 8 TO 10 STITCHES PER INCH (SEE NOTE 1).
3. COLOR FOR -15 AND -16 SHALL APPROXIMATELY MATCH SAGE GREEN CABLE NO. 66046, STANDARD COLOR CARD OF THE COLOR ASSOCIATION OF THE U.S. INC.
4. COLOR FOR -8 THRU -13 SHALL APPROXIMATELY MATCH SAGE GREEN 1531. COLOR FOR -14 SHALL BE NATURAL.
5. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED.
   TOLERANCES: FRACTIONS LESS THAN 4 INCHES ±1/16,
   4 INCHES TO 12 INCHES ±1/8,
   OVER 12 INCHES ±1/4.
6. SEAR ALL ENDS OF WEBBINGS AND TAPES TO PREVENT FRAYING. AVOID FORMING SHARP EDGES.
7. ALL EXPOSED ENDS OF STITCHING SHALL BE BACK STITCHED NOT LESS THAN 1/2 INCH. THREAD BREAKS SHALL BE STITCHED BACK OF BREAK A MINIMUM OF 1/2 INCH.
8. MARKING INK SHALL BE IAW MIL-I-6903, COLOR: BLACK AND SHALL HAVE A PH OF 5.0 TO 8.5.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
10. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 11 APR 55 REVISED (E) FOR CHANGES SEE SHEETS 1 THRU 5

P.A. NAVY - AS Other Cust USAF - 99	TITLE BELT, AIRCRAFT SAFETY, CREWMAN'S	MILITARY STANDARD MS16070
PROCUREMENT SPECIFICATION MIL-R-81729(AS)	SUPERSEDES: MS16070(AER) & NAVAIR 60A135E1	SHEET 5 OF 5

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PLATE NO. 23065

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:53Z
Check the source to verify that this is the current version before use.