INCH-POUND

MS17345F
w/AMENDMENT 1
16 November 2017
SUPERSEDING
MS17345F
16 January 2013

DETAIL SPECIFICATION SHEET

CONNECTOR, PLUG, ELECTRICAL, CABLE CONNECTING, FEMALE

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification sheet and MIL-DTL-22992.

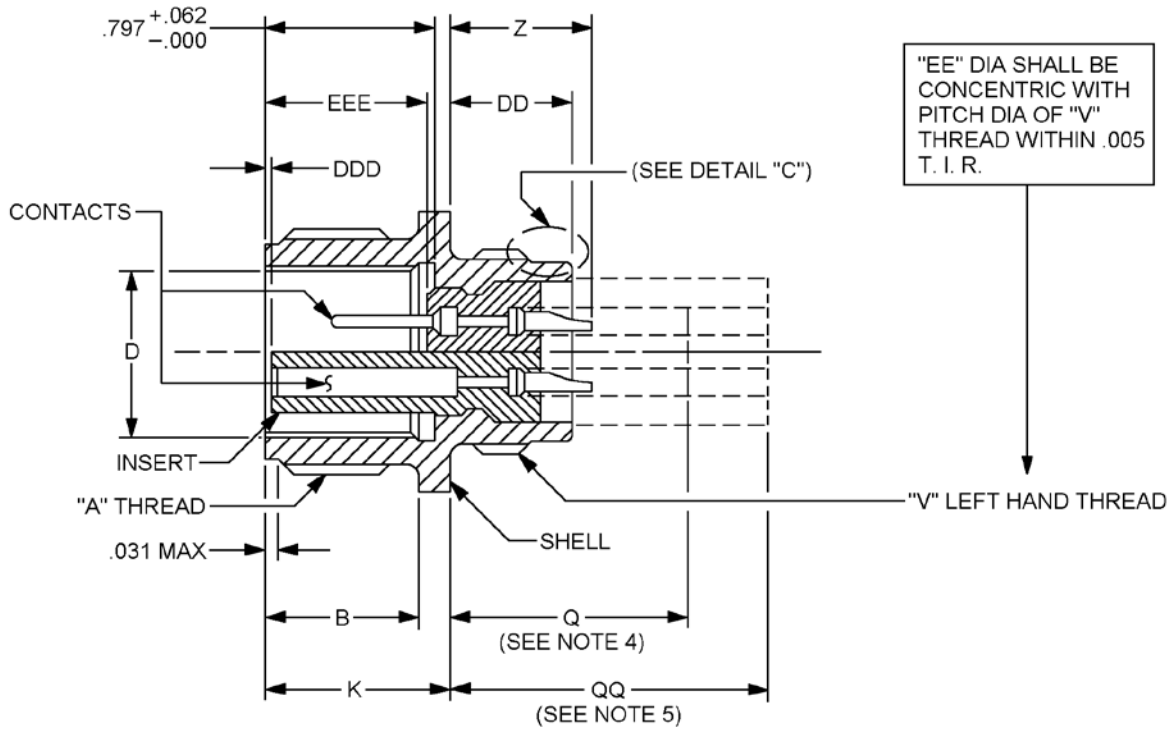


FIGURE 1. Dimensions and configuration.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

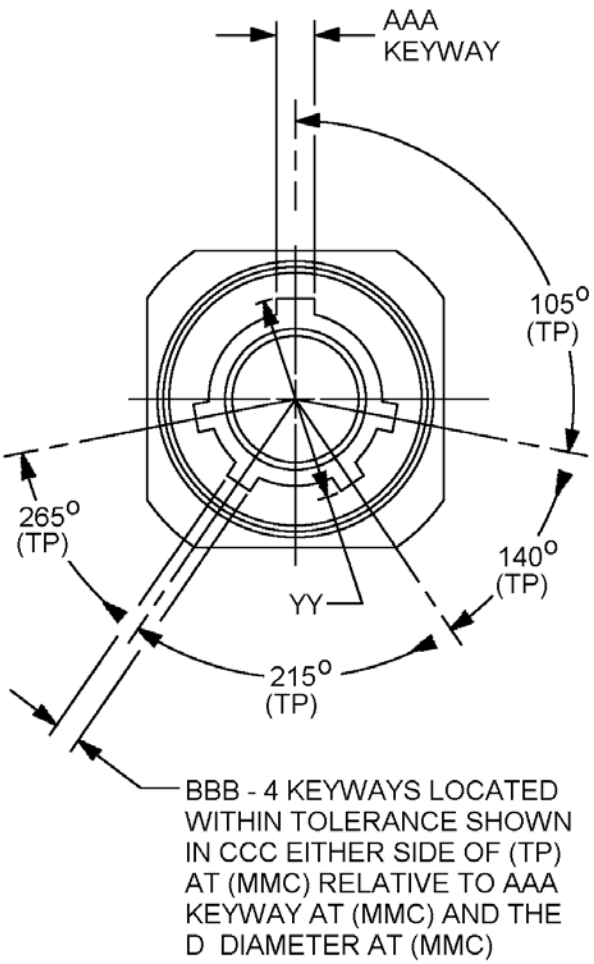


FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.


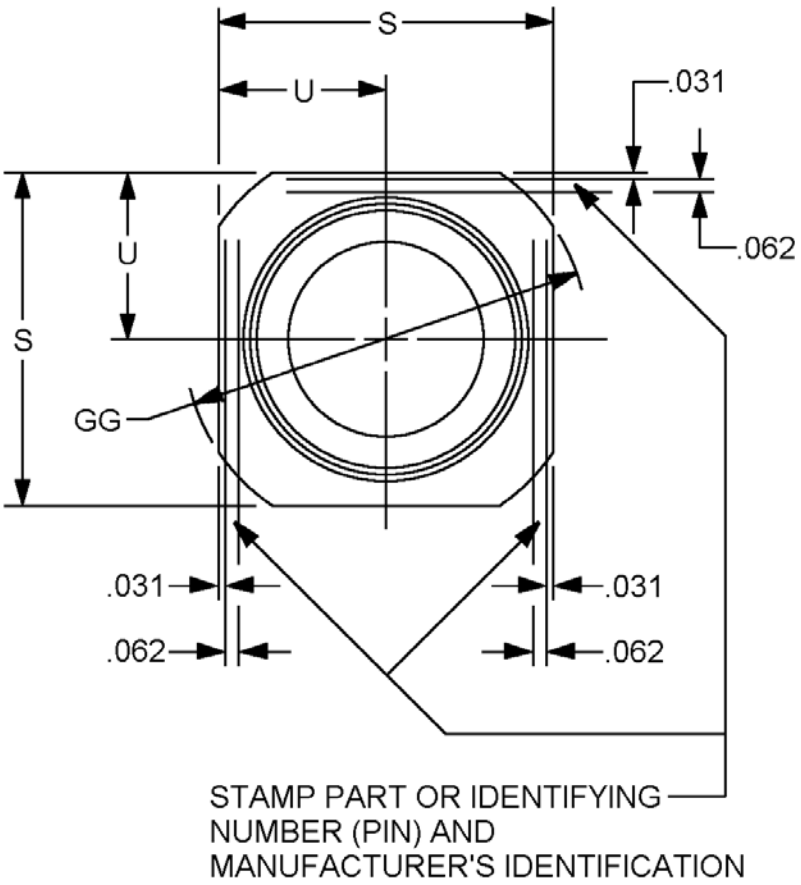


FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

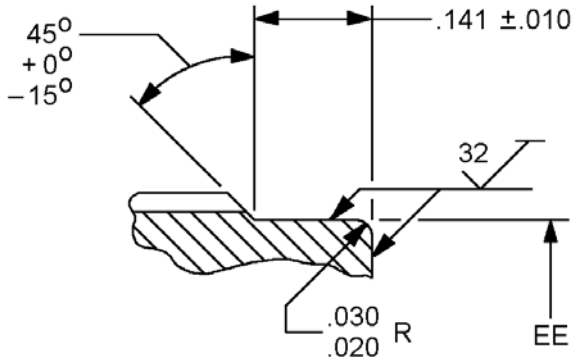

DETAIL "C"

Shell size	A Thread (plated) class 2A	B + .016 - .000	D dia + .005 - .010	K + .021 - .020
12	0.8750-0.1P-0.2L-DS	.688	.567	.938
14	1.0000-0.1P-0.2L-DS		.692	
16	1.1250-0.1P-0.2L-DS		.817	
18	1.2500-0.1P-0.2L-DS	.703	.942	.953
20	1.3750-0.1P-0.2L-DS		1.068	
22	1.5000-0.1P-0.2L-DS		1.192	
24	1.7500-0.1P-0.2L-DS	.766	1.317	1.016
28	2.0000-0.1P-0.2L-DS		1.536	
32	2.2500-0.1P-0.2L-DS	.703	1.786	1.078
36	2.5000-0.1P-0.2L-DS		2.005	
40	2.7500-0.1P-0.2L-DS		2.255	
44	3.0000-0.1P-0.2L-DS		2.545	

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

Shell size	Q max	QQ max	S + .021 - .020	U ± .010	V Thread (plated) class 2A LH
12	1.055	--	1.000	.500	.7500-20 UNEF
14		1.605	1.094	.547	.8750-20 UNEF
16			1.281	.641	1.0000-20 UNEF
18	1.040	1.590	1.375	.688	1.1250-18 NEF
20			1.500	.750	1.2500-18 NEF
22			1.625	.812	1.3750-18 NEF
24	.977	1.527	1.875	.938	1.6250-18 NEF
28			2.125	1.062	1.8750-16 UN
32	.915	1.465	2.375	1.188	2.0625-16 N
36			2.625	1.312	2.3125-16 N
40			3.000	1.500	2.6250-16 UN
44	NA	NA	3.250	1.625	2.8750-16 UN

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

Shell size	DD ± .010	EE dia + .001 - .007	GG dia	YY dia + .010 - .006	AAA	BBB
12	.641	.672	1.250	.647	.126 -.001, +.007	.063 -.001, +.007
14		.797	1.375	.772		
16		.922	1.500	.897	.182 -.001, +.010	.108 -.001, +.010
18	.625	1.040	1.625	1.022		
20		1.164	1.750	1.148		
22		1.289	1.875	1.272		
24		1.539	2.125	1.473	.260 -.001, +.010	.155 -.001, +.010
28		1.780	2.37	1.692		
32	.563	1.967	2.625	1.942		
36		2.217	2.875	2.161		
40	.703	2.530	3.125	2.411		
44		2.780	3.500	2.692		

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

<table>
<tr><th>Shell size</th><th>CCC</th><th>DDD
Socket insert location
± .030</th><th>EEE
Pin insert location
± .030</th><th>Z
max
(see requirements)</th><th>Z
min
(size 0 contacts only)</th></tr>
<tr><td>12</td><td rowspan="2">.0035</td><td rowspan="11">.020</td><td rowspan="11">.729</td><td rowspan="3">.726</td><td rowspan="3">NA</td></tr>
<tr><td>14</td></tr>
<tr><td>16</td><td rowspan="10">.007</td></tr>
<tr><td>18</td><td rowspan="3">.711</td></tr>
<tr><td>20</td><td rowspan="2">.780</td></tr>
<tr><td>22</td></tr>
<tr><td>24</td><td rowspan="2">.648</td><td rowspan="2">.717</td></tr>
<tr><td>28</td></tr>
<tr><td>32</td><td rowspan="3">.576</td><td rowspan="3">.655</td></tr>
<tr><td>36</td></tr>
<tr><td>40</td></tr>
<tr><td>44</td><td>.039</td><td>.764</td><td>.797</td></tr>
</table>

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.686	17.34	1.068	27.13	1.786	45.36
.0035	0.09	.688	17.42	1.078	27.38	1.875	47.63
.005	0.13	.692	17.58	1.094	28.78	1.942	49.33
.006	0.15	.703	17.86	1.125	28.58	1.967	49.96
.007	0.18	.711	18.06	1.148	29.16	2.000	50.80
.010	0.25	.717	18.21	1.164	29.60	2.005	50.93
.016	0.41	.726	14.44	1.188	30.18	2.0625	52.39
.020	0.51	.729	18.52	1.192	30.28	2.125	53.98
.021	0.53	.750	19.05	1.250	31.75	2.161	54.89
.030	0.76	.764	19.41	1.272	32.31	2.217	56.31
.031	0.79	.766	19.46	1.281	32.54	2.250	57.15
.039	0.99	.772	19.61	1.289	33.74	2.255	57.28
.062	1.57	.780	19.81	1.312	33.32	2.3125	58.737
.063	1.60	.797	20.24	1.317	33.45	2.375	60.33
.108	2.74	.812	20.62	1.375	34.93	2.411	61.24
.126	3.20	.817	20.75	1.465	37.21	2.500	63.50
.141	3.58	.875	22.23	1.473	37.41	2.530	64.26
.155	3.94	.897	22.78	1.500	38.10	2.545	64.64
.182	4.62	.915	23.24	1.527	38.79	2.625	66.70
.260	6.60	.922	23.42	1.536	39.01	2.692	68.38
.500	12.70	.938	23.82	1.539	39.09	2.750	69.85
.547	13.89	.942	23.93	1.590	40.39	2.764	70.21
.563	14.30	.953	24.21	1.605	40.77	2.780	70.61
.567	14.40	.977	24.82	1.625	41.28	2.875	73.03
.576	14.63	1.000	25.40	1.692	42.98	3.000	76.20
.622	15.80	1.016	25.81	1.750	44.45	3.125	79.38
.625	15.86	1.022	25.96	1.780	45.21	3.250	82.55
.641	16.28	1.040	24.41			3.500	88.90
.647	16.43	1.055	26.80				
.648	16.45	1.062	26.97				
.655	16.64						
.672	17.06						

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified tolerances are ± .016 inch (0.41 mm).
3. Metric equivalents are given for information only.
4. Maximum termination of grommet extension for contact sizes 12 and 16 for class J.
5. Maximum termination of grommet extension for contact sizes 0, 4 and 8 for class J.
6. For protective cover, see MS17349, type A.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1.

Mates with plug MS17344.

Dimensions shall be maintained when inserts are pressed firmly against indicated shoulder.


For size 0 contacts only: Increase Z dimension by .312 (7.92 mm) for shell sizes 12 through 40, and increase Z dimension by .062 (1.57 mm) for shell size 44.

For size, insert arrangement, alternate position, contact size, spacing and service rating, see MIL-STD-1651.

Shell finish: See MIL-DTL-22992.

Class shall be designated by the letter C (pressurized), J (pressurized with grommet) or R (environmental resisting).

Part or Identifying Number (PIN) example:

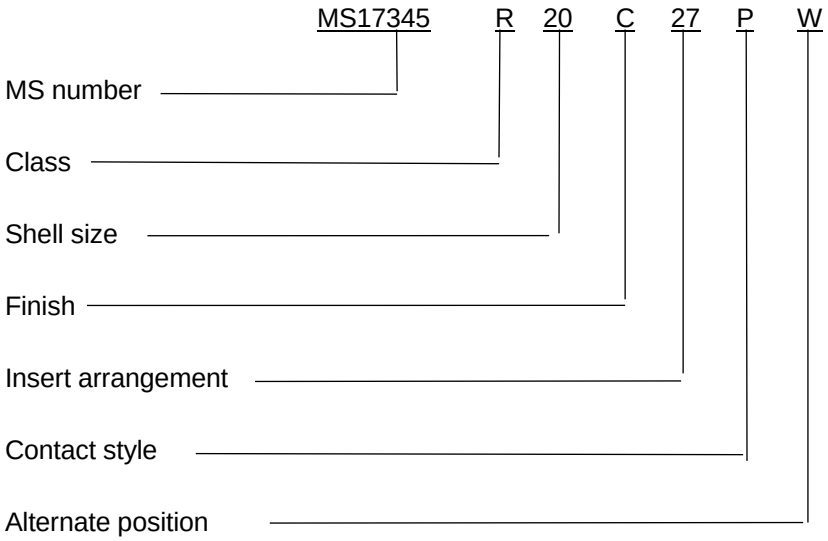

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-DTL-22992, this document references the following:

MS17344
MS17349
MIL-STD-1651

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Preparing activity:
DLA – CC

Review activities:
Army – AR, MI
Navy – AS, CG, MC, OS, YD
Air Force - 19

(Project 5935–2017–152)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.