INCH-POUND
MS21026G
w/Amendment 1
13 November 2014
SUPERSEDING
MS21026G
5 October 2011

DETAIL SPECIFICATION SHEET

SWITCH, TOGGLE, POSITIVE BREAK, LEVER LOCK, MINIATURE TOGGLE
SEALED, SOLDER LUG, SINGLE POLE, .469 MOUNTING BUSHING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the products described herein shall consist of this specification sheet and MIL-DTL-8834.


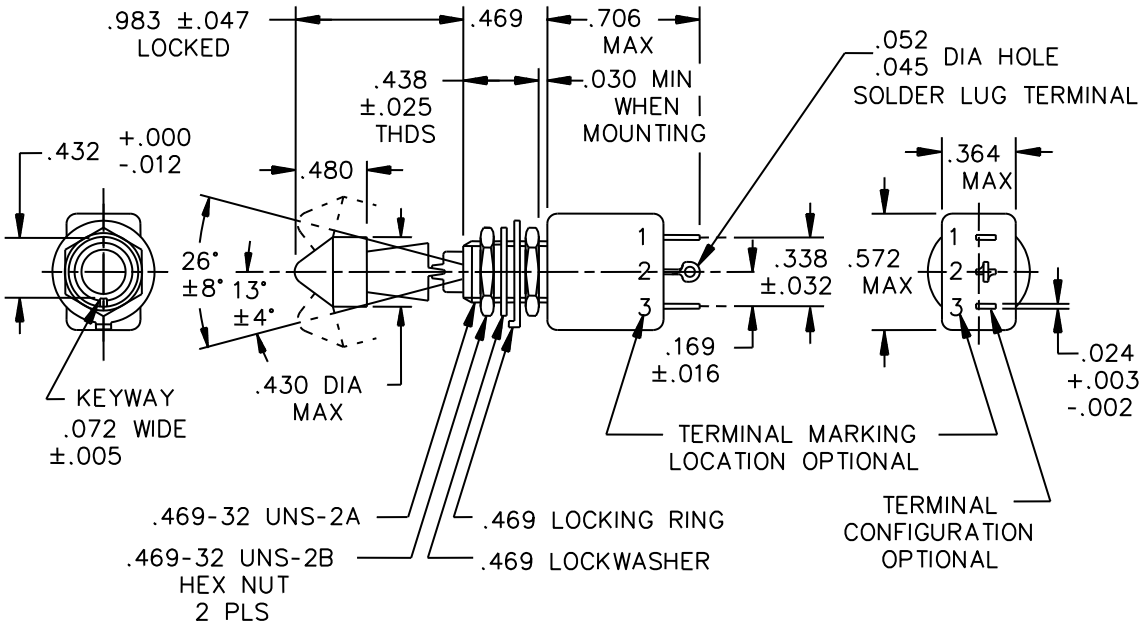


FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.

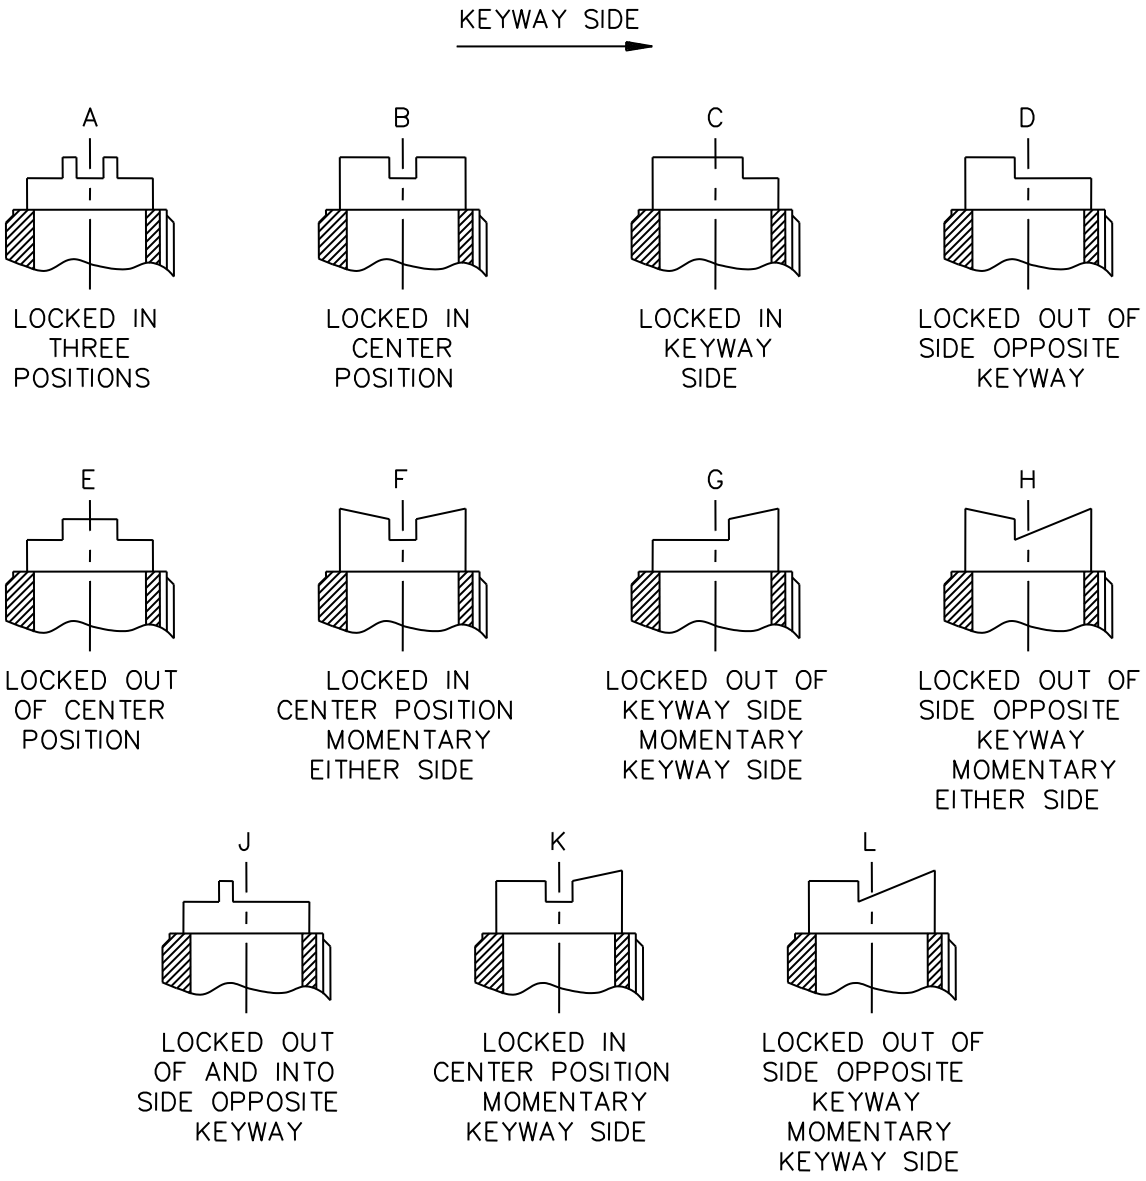

FIGURES A THROUGH L ILLUSTRATE THE LOCKING AND MOMENTARY CONFIGURATION AND NOT THE DETAIL CONSTRUCTION OF THE LOCKING DESIGN

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.002	0.05	.030	0.76	.364	9.25
.003	0.08	.032	0.81	.430	10.92
.005	0.13	.045	1.14	.432	10.97
.010	0.25	.047	1.19	.438	11.13
.012	0.30	.052	1.32	.469	11.91
.016	0.41	.072	1.83	.480	12.19
.024	0.61	.169	4.29	.572	14.53
.025	0.64	.338	8.59	.706	17.93
				.983	24.97

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) on decimals and ±0.5° on angles.

FIGURE 1. Dimensions and configuration - Continued.

REQUIREMENTS:

For hardware detail specifications, see appendix of MIL-DTL-8834.

In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

Shock: Method I and method II (high impact). The switch shall be electrically and mechanically operative at the conclusion of the shock test except there can be mechanical transfer of the contact mechanism at all levels when tested in accordance with method II (high impact).

Toggle seal test: Method II.

Part or Identifying Number (PIN) shall consist of MS number, locking combination letter and dash number.

Strength of terminals: 5 pounds normal to the mounting plane and 2 pounds in other planes.

Altitude: 50,000 feet.

115 V ac, 60 hertz electrical endurance tests are to performed at room temperature and pressure.

Maximum weight: .0593 pound (26.9 grams).

Unlocking force: 4 ±1 pound.

Configuration of switch case housing, terminals, and barriers: Design optional providing maximum dimensions specified are not exceeded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.

Example PIN:
MS21026-B211: Toggle sealed, on-off-on, locked in center position.
MS21026-K281: Toggle sealed, none-off-momentary on, locked in center position.

TABLE I. Detail requirements.

MS dash no	Locking comb	Circuit made between terminals as indicated with the toggle lever in these positions: 1/			Current capacity in amperes						Life low current level switching 5 mV
					Resistive load			Inductive load			
					28 volts dc	115 volts		28 volts dc	115 volts		
		Opposite keyway side 4/	Center position	Keyway side 4/		60 Hertz ac	400 Hertz ac		60 Hertz ac	400 Hertz ac	
-211	A, B, C, D, E	on 2-3	off	on 1-2	5	2	3	1 2/	1	2	25 µA 3/
-221	C, E		none	off							
-231				on 1-2							
-241	J, B		off	none							
-271	F, H	mom-on 2-3	off	mom-on 1-2							
-281	K	none									
-311	G, K, L	on 2-3									

1/ Direction of movement of internal mechanism is opposite to the direction of the toggle movement.
2/ With time constant of .020 ±.002 seconds.
3/ Contact resistance not to exceed 50 ohms during life, low current level switching.
4/ Non-functional terminals shall not be supplied.

Referenced documents:
MIL-DTL-8834

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where modifications from this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Review activities:
Army - AR, MI
Navy - EC
Air Force - 99

Preparing activity:
DLA – CC

(Project 5930-2014-012)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.