
FED. SUP CLASS 3120

CONCENTRICITY TOLERANCE BETWEEN B AND D DIA. SHALL NOT EXCEED .003 T.I.R. .

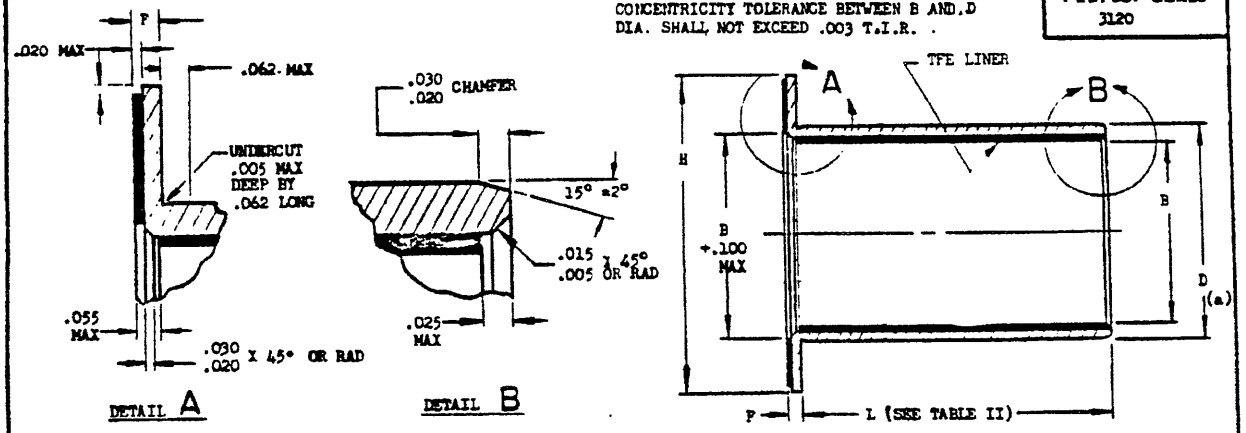

(D) INACTIVE FOR NEW DESIGN
SUPERSEDED BY MIL-B-81934/2

TABLE I

DASH NO.	NOMINAL SIZE	B DIA +.0000 −.0010	D DIA (a)	F +.000 −.005	H DIA +.000 −.020	WEIGHT LB/IN. (REF) L = 1.000 AL	WEIGHT LB/IN. (REF) L = 1.000 CRES	FLANGE WEIGHT LBS/IN AL	FLANGE WEIGHT LBS/IN CRES
-04	1/4	.2515	.3760	.0625	.750	.009	.024	.003	.007
-05	5/16	.3140	.4386	.0625	.812	.011	.028		
-06	3/8	.3765	.5012	.0625	.875	.012	.032		.008
-07	7/16	.4390	.5638	.0625	.937	.013	.036		.010
-08	1/2	.5015	.6265	.0625	1.000	.015	.041	.004	.011
-09	9/16	.5640	.6892	.0625	1.125	.017	.047		.014
-10	5/8	.6265	.8142	.0625	1.250	.027	.075	.005	.020
-11	11/16	.6890	.8767	.0625	1.375	.030	.084	.007	.023
-12	3/4	.7515	.9393	.0625	1.500	.034	.093	.009	.025
-14	7/8	.8765	1.0645	.0625	1.625	.038	.104		.027
-16	1	1.0015	1.1898	.0625	1.750	.043	.118	.010	.041
-18	1 1/8	1.1265	1.3148	.0937	1.875	.051	.142	.014	.050
-20	1 1/4	1.2515	1.4398	.0937	2.000	.058	.161	.018	.053
-22	1 3/8	1.3765	1.5648	.0937	2.125	.063	.175	.019	.054
-24	1 1/2	1.5015	1.7523	.0937	2.250	.084	.233	.020	.056
-26	1 5/8	1.6265	1.8773	.0937	2.375	.090	.249	.023	.064
-28	1 3/4	1.7515	2.0023	.0937	2.500	.098	.271	.026	.072
-32	2	2.0015	2.2523	.0937	2.750	.111	.306		

(a) D TOLERANCE: ALUMINUM, ±.0005; CORROSION RESISTANT STEEL, +.0000, −.0005.

TABLE II (C) SEE SHEET 3

DASH NO	NOMINAL SIZE	LENGTH L +.000 −.010																												
		1/8	9/32	5/16	11/32	3/8	7/16	1/2	9/16	5/8	11/16	3/4	7/8	1	1 1/8	1 1/4	1 3/8	1 1/2	1 5/8	1 3/4	1 7/8	2	2 1/8	2 1/4	2 3/8	2 1/2	2 3/4	3
-04	1/4	08	09	10	11	12	14																							
-05	5/16	08	09	10	11	12	14	16	18																					
-06	3/8	08	09	10	11	12	14	16	18	20	22																			
-07	7/16	08	09	10	11	12	14	16	18	20	22	24	28																	
-08	1/2	08	09	10	11	12	14	16	18	20	22	24	28																	
-09	9/16	08	09	10	11	12	14	16	18	20	22	24	28	32	36															
-10	5/8	08	09	10	11	12	14	16	18	20	22	24	28	32	36	40	44													
-11	11/16	08	09	10	11	12	14	16	18	20	22	24	28	32	36	40	44	48	52											
-12	3/4	08	09	10	11	12	14	16	18	20	22	24	28	32	36	40	44	48	52											
-14	7/8	08	09	10	11	12	14	16	18	20	22	24	28	32	36	40	44	48	52											
-16	1	08	09	10	11	12	14	16	18	20	22	24	28	32	36	40	44	48	52	56	60									
-18	1 1/8			10	11	12	14	16	18	20	22	24	28	32	36	40	44	48	52	56	60									
-20	1 1/4					12	14	16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68							
-22	1 3/8					12	14	16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68							
-24	1 1/2					12	14	16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68	72	76	80	88			
-26	1 5/8							16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68	72	76	80	88	96		
-28	1 3/4							16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68	72	76	80	88	96		
-32	2							16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68	72	76	80	88	96		

REVISED (A) 5 Dec 66 (B) 10 Apr 67 (C) 28 Mar 69 (D) 16 AUG 1977
APPROVED 10 Aug 1966

Review activities: USAF - 99

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P.A. Navy - AS Other Cust USAF - 11	TITLE BEARING, SLEEVE, FLANGED, TFE LINED	MILITARY STANDARD MS21241(ASG)
PROCUREMENT SPECIFICATION MIL-B-81934 (ASG)	SUPERSEDES:	SHEET 1 OF 3

DD FORM 672-1 (Limited coordination)
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT NO. 3120-0518

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:28Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
3120

TABLE III (a)

DASH NO.	WEIGHT LBS. ALUMINUM			WEIGHT LBS. CRES		
04	.003	+.006	X LENGTH	.007	+.017	X LENGTH
05		+.008			+.022	
06		+.009			+.025	
07		+.010		.008	+.028	
08	.004	+.011		.010	+.031	
09		+.013		.011	+.036	
10	.005	+.022		.014	+.061	
11	.007	+.023		.020	+.064	
12	.009	+.025		.023	+.070	
14		+.029		.025	+.080	
16	.010	+.033		.027	+.091	
18	.014	+.037		.041	+.101	
20	.018	+.040		.050	+.111	
22	.019	+.044		.053	+.122	
24		+.065		.054	+.179	
26	.020	+.070		.056	+.193	
28	.023	+.075		.064	+.207	
32	.026	+.085		.072	+.234	

c (a) EXAMPLE OF WEIGHT CALCULATION:
MS21241-16A08 = .010 +.033 X .5 = .010 +.0165 = .0265 LBS.

MATERIAL: CODE
BEARING: "A" = ALUMINUM ALLOY, QQ-A-200/11, QQ-A-225/9
"C" = CORROSION RESISTANT STEEL, AMS 5643 (17-4PH), AISI 410 OR 416

LINER: SEE PROCUREMENT SPECIFICATION
HARDNESS: 17-4PH COND H-1150 AS PER MIL-H-6875
410, 416 R_c 27-32 AS PER MIL-H-6875

FINISH:
ALUMINUM TO BE ANODIZED PER MIL-A-8625.

SURFACE FINISH:
SMOOTH MACHINE FINISH 63 MICRO-INCH PER RHR ON O.D. 125 MICRO-INCH RHR ON ALL OTHER SURFACES, PER ASA B46.1 - 1962, UNLESS OTHERWISE SPECIFIED.

TEMPERATURE RANGE:
-65° F TO +250° F

BREAK SHARP EDGES AND CORNERS AND REMOVE ALL BURRS AND SLIVERS.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.

EXAMPLE OF PART NUMBER:

c MS21241 - 04 A 008 = 1/4 INCH BORE DIA ALUMINUM x 1/2 LONG.

008 — LENGTH CODE IN MULTIPLES OF 1/32 INCH
A — MATERIAL CODE
04 — BORE DIAMETER CODE IN MULTIPLES OF 1/16 INCH
MS21241 — BASIC MS PART NUMBER

c STATUS NOTE:
REVISION "A" AND REVISION "B" ARE CANCELLED AND SUPERSEDED BY REVISION "C" AFTER 28 MARCH 1969.

c INTERCHANGEABILITY RELATIONSHIP:
USE ONLY ASSIGNED PART NUMBERS FOR LENGTH AS LISTED IN COLUMN 3 of TABLE IV.

LOAD RATINGS:

DYNAMIC CAPACITY 25,000 B X L LBS. OR 25,000 B^2 LB. WHICHEVER IS THE LESSER.

STATIC LIMIT LOAD 60,000 B X L LBS. OR 60,000 B^2 LB. WHICHEVER IS THE LESSER.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF _ _ IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 10 Aug 66 REVISED (a) FOR CHANGES SEE SHEETS 1, 4 & 3

P.A. Navy - AS / Other Cust USAF - 11	TITLE BEARING, SLEEVE, FLANGED, TFE LINED	MILITARY STANDARD MS21241 (ASG)
PROCUREMENT SPECIFICATION MIL-B-8943(ASG)	SUPERSEDES:	SHEET 2 OF

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.
AMC Use Only

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities: USAF - 99

FED. SUP CLASS
3120

C

TABLE IV

INTERCHANGEABILITY (SEE STATUS NOTE)

LENGTH FROM TABLE II	COLUMN 1 REV. A DATED 5 DEC 1966 (LENGTH IN 1/16 INCREMENTS)	COLUMN 2 REV. B DATED 10 APR 1967 (LENGTH IN 1/32 INCREMENTS)	COLUMN 3 REV. C (LENGTH IN 1/32 INCREMENTS)
1/4	04	08	008
9/32	—	09	009
5/16	05	10	010
11/32	—	11	011
3/8	06	12	012
7/16	—	14	014
1/2	08	16	016
9/16	—	18	018
5/8	10	20	020
11/16	—	22	022
3/4	12	24	024
7/8	—	28	028
1	16	32	032
1 1/8	—	36	036
1 1/4	20	40	040
1 3/8	—	44	044
1 1/2	24	48	048
1 5/8	—	52	052
1 3/4	28	56	056
1 7/8	—	60	060
2	32	64	064
2 1/8	—	68	068
2 1/4	36	72	072
2 3/8	—	76	076
2 1/2	40	80	080
2 3/4	—	88	088
3	48	96	096

Review activities:
USAF - 99

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

APPROVED 10 Aug 1966 REVISED (D) FOR CHANGES SEE SHEETS 1.

☆U.S. GOVERNMENT PRINTING OFFICE: 1977—703-122/6593

P.A. Navy - AS Other Cust USAF - 11	TITLE BEARING, SLEEVE, FLANGED, TFE LINED	MILITARY STANDARD MS21241(ASG)
PROCUREMENT SPECIFICATION MIL-B-8943 (ASG)	SUPERSEDES:	SHEET 3 OF

DD FORM 672-1 (Limited coordination)
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:28Z
Check the source to verify that this is the current version before use.