

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-R-6106.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.


Form Approved
OMB No 0704-0188

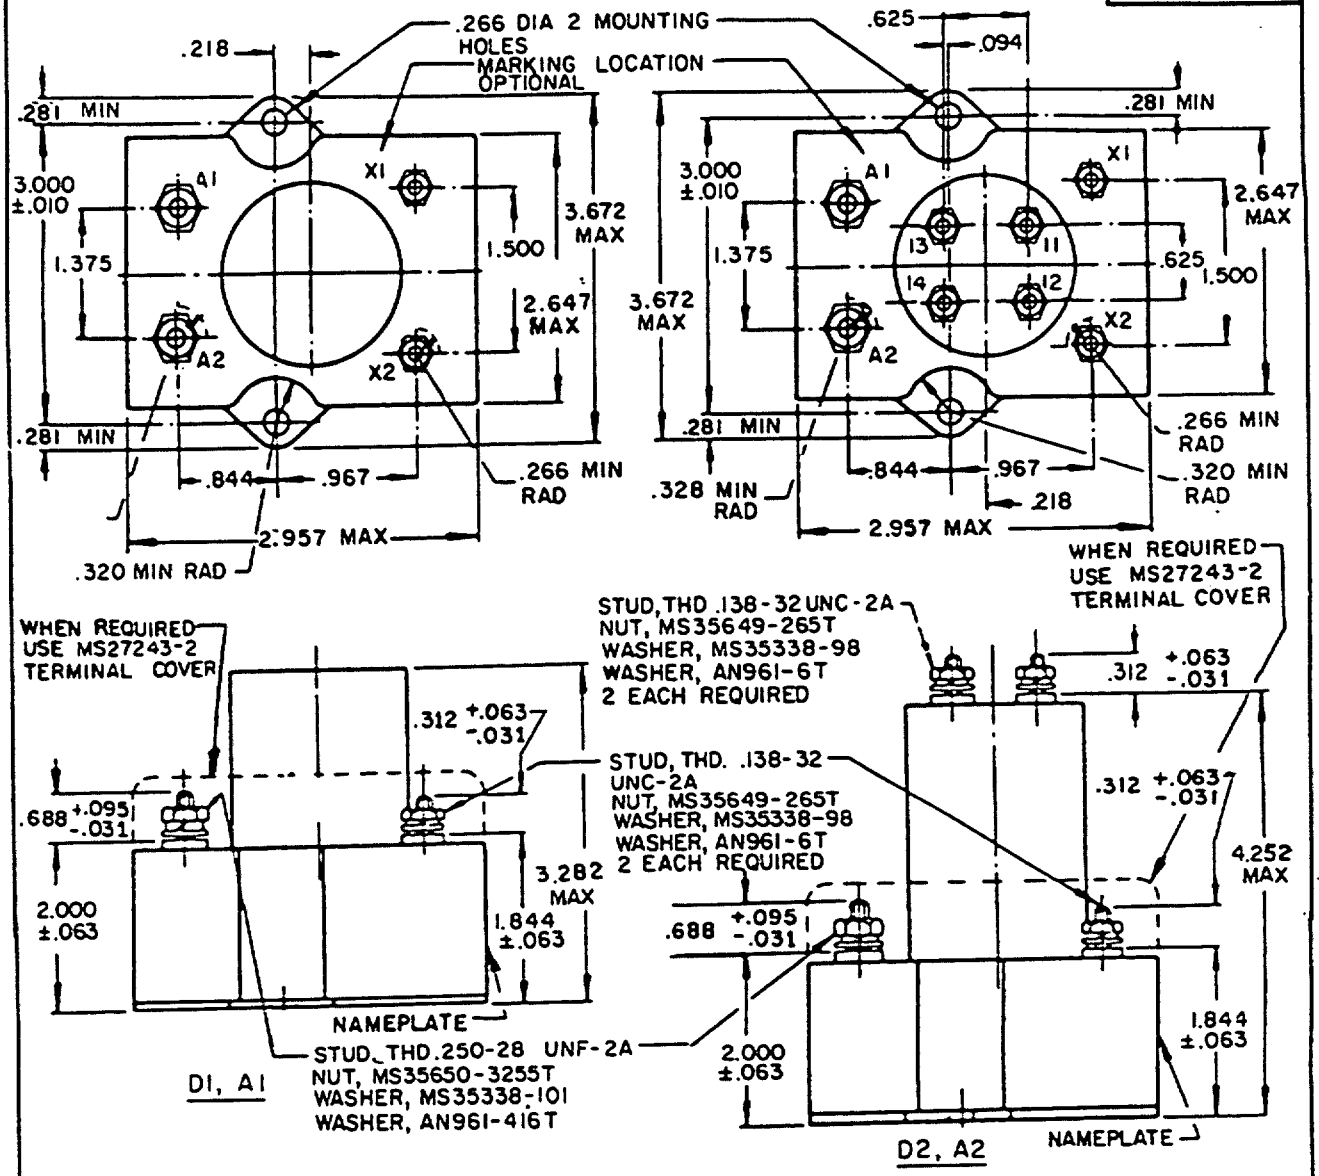

Inches	mm	Inches	mm	Inches	mm
.010	0.25	.281	7.14	1.500	38.10
.031	0.79	.312	7.92	1.844	46.84
.063	1.60	.320	8.13	2.000	50.80
.094	2.39	.328	8.33	2.467	67.23
.095	2.41	.625	15.88	2.957	75.11
.138	3.51	.688	17.48	3.000	76.20
.218	5.54	.844	21.44	3.282	83.36
.250	6.35	.967	24.56	3.672	93.27
.266	6.76	1.375	34.93	4.252	108.00



CIRCUIT D1



CIRCUIT D2

PREPARING ACTIVITY: Air Force - 85
CUSTODIANS: ARMY - NAVY - AS
AIR FORCE - 85 DLA -
REVIEW: Air Force - 11, 99
Navy - AS, EC
USER.
PROJECT NUMBER: 5945-0810-02

MILITARY SPECIFICATION SHEET

TITLE: RELAYS, ELECTROMAGNETIC, 100 AMPERES, 1PST (NO), TYPE I, HERMETICALLY SEALED

SPECIFICATION SHEET NUMBER
MS24141H 20 Feb 90
SUPERSEDING
MS24141G 24 Sept 82
AMSC N/A FSC 5945

DISTRIBUTION STATEMENT
A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:48Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-R-6106.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.031.
4. This specification sheet takes precedence over documents referenced herein.
5. Referenced documents shall be of the issue in effect on date of invitation for bid.
6. Coil and auxiliary terminals may use additional flat washer for terminal seat.

TABLE I. Part numbers and characteristics. 1/

Part number MS24141-	Type	Coil	Terminal type	Mounting or mating socket	Auxiliary contacts	Maximum weight in pounds 2/
D1	I	dc	Stud	Flange	None	1.4
D2					Yes	1.6

1/ A1 and A2 have been cancelled without replacement.
2/ Weights include covers and barriers.

TABLE II. Operating characteristics.

Part number MS24141	Coil data											Time - milliseconds max 1/					
	Coil	Nominal			Max		Max pick-up voltage			Hold voltage 1/	Drop out voltage 1/	Operate 3/	Release 4/	Bounce			
		Volts 2/	Freq Hz	Ω Res +15% -10	Volts	Amp	Normal 1/	High temp test	Cont current test					Main		Aux	
														NO	NC	NO	NC
D1	X1,X2	28	dc	64.5	29	.50	18	21	22.5	7	1.5	25	10	2.5	---	---	---
D2	X1,X2	28	dc	64.5	29	.50	18	21	22.5	7	1.5	25	10	2.5	---	2.5	2.5

1/ Over the temperature range.
2/ CAUTION: Use of any coil voltage less than nominal coil voltage will compromise the operation of the relay.
3/ With nominal coil voltage.
4/ From nominal coil voltage.

PREPARING ACTIVITY: Air Force - 85
CUSTODIANS: ARMY - NAVY - AS; AIR FORCE - 85; DLA -
REVIEW: Air Force - 11, 99; Navy - AS, EC
USER:
PROJECT NUMBER: 5945-0810-02
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

MILITARY SPECIFICATION SHEET
TITLE: RELAYS, ELECTROMAGNETIC, 100 AMPERES, 1PST (NO), TYPE I, HERMETICALLY SEALED

SPECIFICATION SHEET NUMBER: MS24141H
SUPERSEDING MS24141G

AMSC N/A
FSC 5945

Page 2 of 4

Form Approved OMB No. 0704-0188

Downloaded from http://assist.daps.dla.mil/quicksearch/ on 2016-10-23T14:48Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-R-6106.

TABLE III. Rated contact load (amperes per pole) case grounded.

Type of load	Life operating cycles x 10^3	28 V dc				115 V ac, 1 phase				115/200 V ac, 3 phase 1/			
		Main		Aux		Main		Aux		Main		Aux	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
Resistive	50	100		5	5	100		5					
Inductive	10	100		5	5			5					
Inductive													
Motor	50	100				75							
Lamp	50	50		.75	.75	50		.75					
Transfer load 2/													
Mechanical life reduced current	100	25		1.25	1.25			1.25					
Intermediate current	50	10		Per	spec	10							

1/ Absence of value indicates relay is not rated for 3 phase application.
2/ Transfer load indicates relay suitable for transfer between unsynchronized ac power supplies at rating indicated.

PREPARING ACTIVITY: Air Force - 85
CUSTODIANS: ARMY - AS, NAVY - AS, AIR FORCE - 85, DLA -
REVIEW: Air Force - 11, 99, Navy - AS, EC
USER:
PROJECT NUMBER: 5945-0810-02
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

MILITARY SPECIFICATION SHEET
TITLE: RELAYS, ELECTROMAGNETIC, 100 AMPERES, 1PST (NO), TYPE I, HERMETICALLY SEALED

SPECIFICATION SHEET NUMBER: MS24141H
SUPERSEDING: MS24141G

AMSC N/A
FSC 5945

Page 3 of 4

Form Approved OMB No. 0704-0188

Downloaded 2020-10-23T14:48Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-R-6106.

PREPARING ACTIVITY: Air Force - 85
CUSTODIANS: ARMY - NAVY - AS
AIR FORCE - 85 DLA -
Air Force - 11, 99
REVIEW: Navy - AS, EC
USER:
PROJECT NUMBER: 5945-0810-02
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

MILITARY SPECIFICATION SHEET
TITLE: RELAYS, ELECTROMAGENTIC, 100 AMPERES, 1PST (NO), TYPE I, HERMETICALLY SEALED

SPECIFICATION SHEET NUMBER: MS24141H
SUPERSEDING MS24141G
AMSC N/A
FSC 5945

Environmental characteristics

Temperature range	-70° to +125°C
Maximum altitude rating	80,000 ft
Shock G-level	25 g's
Duration	6-9 ms
Max duration contact opening	2 ms
Vibration - Sinusoidal (see table IV)	
Vibration - Random	N/A
High shock	N/A
Acceleration	15 g's

TABLE IV. Vibration levels.

Part number MS24141-	5-10 Hz	10-55 Hz	55-250 Hz	250-500 Hz	500-1,500 Hz
D1	.08 DA	.06 DA	10 g's	10 g's	7 g's
D2				5 g's	5 g's

TABLE V. Qualification by similarity.

Part number MS24141-	Loads						Dynamics 1/3/			Environmental		
	Type 1			Type 1 ER								
	A	B	C	D	E	F	A	B	C	A	B	C
D1	4						2			4		
D2	4 2/						2			4 2/		

1/ For Group C testing, each dash number shall be tested to meet vibration requirements.
2/ Testing of relays with auxiliary contacts. Reference appendix I.
3/ All relays must be tested. Reference MIL-R-6106, appendix I.

Electrical characteristics

Insulation resistance initial	100 megohms
After life or environmental tests	50 megohms
Dielectric strength (sea level)	2-5 seconds

	Inital		After life tests	
	28 V dc	115 V ac	28 V dc	115 V ac
Coil to case	1,250 V rms	1,500	1,000 V rms	1,125
Aux contacts	1,250 V rms	1,500	1,000 V rms	1,125
All other points	1,250 V rms	1,500	1,000 V rms	1,125

Dielectric strength (altitude) 1 minute

	28 V dc	115 V ac
Coil to case	500 V rms	500
Aux contacts	500 V rms	500
All other points	500 V rms	500

Max contact drop initial	0.150 volt
After life test	0.175 volt
Overload current	(NO) 800 amperes
Rupture current	(NO) 1,000 amperes
Duty rating	Continuous
RFI specification	MIL-STD-461
(Applicable to coil circuits of ac operated relays)	

Form Approved OMB No. 0704-0188

Downloaded from https://assist.dla.mil/ -- Downloaded: 2026-10-23T12:48Z
Check the source to verify that this is the current version before use.