
THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-B-3990

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved
OMB No 0704-0188

INCH DESIGN

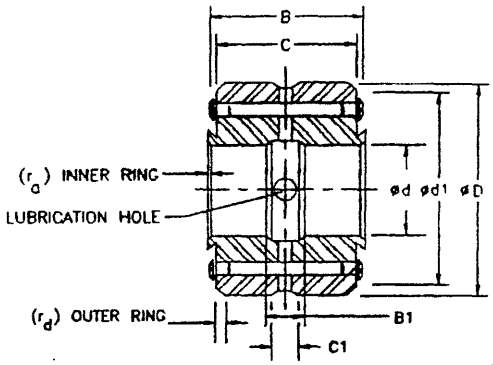

(H) TABLE I

Dimensions in Inches

Dash No.	ød Bore	øD Outer Ring Outside Dia.	øB Over-all Width	c Outer Ring Width	ød1 Washer Outside Dia.	B1 Lubrication Groove Width	C1 Lubrication Groove Width	r_a 1/ Fillet Max.	Total Radial Internal Clearance Max.	Clamping Dia. Min.	Limit Load Rating lbf	Mass (approx) lb
-3	0.1900	0.6875	0.312	0.218	0.625	None	0.062	0.022	0.0017	0.438	1800	0.028
-4	0.2500	0.7500	0.375	0.281	0.687	None	0.093	0.022	0.0017	0.516	2870	0.040
-5	0.3125	0.8125	0.437	0.344	0.750	None	0.093	0.022	0.0017	0.578	4080	0.057
-6	0.3750	0.8750	0.562	0.469	0.812	0.188	0.125	0.022	0.0018	0.641	6330	0.075
-7	0.4375	0.9375	0.625	0.531	0.875	0.188	0.125	0.032	0.0018	0.703	8000	0.097
-8	0.5000	1.1250	0.750	0.656	1.031	0.188	0.125	0.032	0.0018	0.844	11600	0.165
-9	0.5625	1.1875	0.875	0.781	1.094	0.188	0.156	0.032	0.0019	0.891	15000	0.207
-10	0.6250	1.2500	1.000	0.906	1.156	0.375	0.156	0.032	0.0019	0.953	18900	0.252
-12	0.7500	1.3750	1.125	1.000	1.281	0.375	0.156	0.032	0.0019	1.078	23900	0.336
-14	0.8750	1.6250	1.250	1.125	1.500	0.375	0.156	0.032	0.0022	1.250	30500	0.423
-16	1.0000	1.7500	1.250	1.125	1.625	0.375	0.156	0.032	0.0026	1.375	33900	0.51
-20	1.2500	2.0000	1.250	1.049	1.906	0.375	0.156	0.032	0.0026	1.625	37900	0.60
-24	1.5000	2.2500	1.250	1.049	2.156	0.375	0.156	0.032	0.0026	1.875	44200	0.71
-28	1.7500	2.5000	1.250	1.049	2.406	0.375	0.156	0.032	0.0027	2.125	50500	0.78
-32	2.0000	2.7500	1.250	1.049	2.656	0.375	0.156	0.032	0.0028	2.375	56800	0.88
-36	2.2500	3.0000	1.250	1.049	2.906	0.375	0.156	0.032	0.0032	2.625	3.100	0.98
-40	2.5000	3.2500	1.250	1.049	3.156	0.375	0.156	0.032	0.0037	2.875	69400	1.06
-44	2.7500	3.5000	1.250	1.049	3.406	0.375	0.156	0.032	0.0039	3.125	75700	1.15
-48	3.0000	3.7500	1.250	1.049	3.656	0.375	0.156	0.032	0.0039	3.375	82000	1.24
-52	3.2500	4.0000	1.250	1.049	3.906	0.375	0.156	0.032	0.0039	3.641	88300	1.34
-56	3.5000	4.3750	1.250	1.049	4.219	0.375	0.156	0.044	0.0041	3.969	96700	1.73
-60	3.7500	4.6250	1.250	1.049	4.469	0.375	0.156	0.044	0.0041	4.218	103000	1.84
-64	4.0000	4.8750	1.250	1.049	4.719	0.375	0.156	0.044	0.0045	4.469	109000	1.99
-80	5.0000	5.8750	1.250	1.049	5.688	0.375	0.156	0.044	0.0045	5.438	135000	2.75

(H) TABLE II

Dimensions in Millimeters

Dash No.	ød Bore	øD Outer Ring Outside Dia.	øB Over-all Width	c Outer Ring Width	ød1 Washer Outside Dia.	B1 Lubrication Groove Width	C1 Lubrication Groove Width	r_a 1/ Fillet Max.	Total Radial Internal Clearance Max.	Clamping Dia. Min.	Limit Load Rating lbf	Mass (approx) lb
-3	4.826	17.462	7.92	5.54	15.88	None	1.52	0.6	0.043	11.13	8700	0.013
-4	6.350	19.050	8.52	7.14	17.45	None	2.36	0.6	0.043	13.11	12700	0.018
-5	7.935	20.638	11.10	8.74	19.05	None	3.18	0.6	0.043	14.68	18100	0.026
-6	9.525	22.225	14.27	11.91	20.62	4.78	3.18	0.6	0.046	16.28	28100	0.034
-7	11.112	23.812	15.88	13.49	22.22	4.78	3.18	0.8	0.046	17.86	35600	0.044
-8	12.700	28.575	19.05	16.66	26.19	4.78	3.96	0.8	0.046	21.44	51600	0.075
-9	14.288	30.162	22.22	19.84	27.79	6.35	3.96	0.8	0.048	22.63	66700	0.094
-10	15.875	31.750	25.40	23.01	29.36	6.35	3.96	0.8	0.048	24.21	84000	0.115
-12	19.050	34.925	28.58	25.40	32.54	9.52	3.96	0.8	0.048	27.38	106000	0.153
-14	22.225	41.275	31.75	28.57	38.10	9.52	3.96	0.8	0.056	31.75	136000	0.192
-16	25.400	44.450	31.75	26.64	41.28	9.52	3.96	0.8	0.066	34.92	151000	0.23
-20	31.750	50.800	31.75	26.64	48.41	9.52	3.96	0.8	0.066	41.28	169000	0.27
-24	38.100	57.150	31.75	26.64	54.76	9.52	3.96	0.8	0.066	47.62	197000	0.32
-28	44.450	63.500	31.75	26.64	61.11	9.52	3.96	0.8	0.069	53.98	225000	0.35
-32	50.800	69.850	31.75	26.64	67.46	9.52	3.96	0.8	0.071	60.32	253000	0.40
-36	57.150	76.200	31.75	26.64	73.81	9.52	3.96	0.8	0.081	66.66	280000	0.45
-40	63.500	82.550	31.75	26.64	80.16	9.52	3.96	0.8	0.094	73.02	309000	0.48
-44	68.850	88.900	31.75	26.64	86.51	9.52	3.96	0.8	0.099	79.38	337000	0.52
-48	76.200	95.250	31.75	26.64	92.86	9.52	3.96	0.8	0.099	85.72	365000	0.56
-52	82.550	101.600	31.75	26.64	99.21	9.52	3.96	0.8	0.099	92.48	393000	0.61
-56	88.900	111.125	31.75	26.64	107.16	9.52	3.96	1.1	0.104	100.81	430000	0.79
-60	92.250	117.475	31.75	26.64	113.51	9.52	3.96	1.1	0.104	107.14	458000	0.84
-64	101.600	123.825	31.75	26.64	119.86	9.52	3.96	1.1	0.114	113.51	487000	0.90
-80	127.000	149.225	31.75	26.52	144.45	9.52	3.96	1.1	0.114	138.10	600000	1.25

1/ The chamfer on bearings must clear the maximum fillet radius given in the table. This specification does not control bearing chamfer contours.

(H) DENOTES CHANGES

INCH-POUND

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY- AT NAVY-AS
AIR FORCE- 99 DLA-
REVIEW: ARMY-MI, AF-84, DLA-IS
USER:
PROJECT NUMBER: 3110-0854

MILITARY SPECIFICATION SHEET

TITLE

BEARING, ROLLER, NEEDLE, SINGLE ROW, HEAVY DUTY, TYPE I, ANTIFRICTION, INCH

SPECIFICATION SHEET NUMBER
MS24461 05 DEC 94 REV H

SUPERSEDING
MS24461G 16 JUN 77

AMSC- N/A FSC 3110

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:54Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-B-3990

(H) TABLE III – Tolerance Limits

ød Basic Bore		Allowable Deviation From d of Single Mean Dia., d_{mp}		Allowable Deviation From over-all Width, B		Allowable Deviation from Washer out-side dia. dl		Allowable Deviation from Lubri-cation Groove Width, B1	
Over	Incl.	High	Low	High	Low	High	Low	High	Low
0.1250	3.0000	+0	-0.0007	+0	-0.005	+0.010	-0.010	+0	-0.062
3.0000	4.0000	+0	-0.0008	+0	-0.005	+0.010	-0.010	+0	-0.062
4.0000	5.0000	+0	-0.0010	+0	-0.005	+0.010	-0.010	+0	-0.062

D Basic Outside Dia.		Allowable Deviation From D of Single Mean Dia., Dap		Allowable Deviation From Outer Ring Width C		Allowable Deviation from Lubrication Groove Width, C1	
Over	Incl.	High	Low	High	Low	High	Low
0.5000	1.7500	+0	-0.0005	+0	-0.005	+0.031	-0.031
1.7500	3.0000	+0	-0.0006	+0	-0.005	+0.031	-0.031
3.0000	4.6250	+0	-0.0008	+0	-0.005	+0.031	-0.031
4.6250	5.8750	+0	-0.0010	+0	-0.005	+0.031	-0.031

(H) TABLE IV

ød Basic Bore		Allowable Deviation From d of Single Mean Dia., d_{mp}		Allowable Deviation From over-all Width, B		Allowable Deviation from Washer out-side dia. dl		Allowable Deviation from Lubri-cation Groove Width, B1	
Over	Incl.	High	Low	High	Low	High	Low	High	Low
3.18	76.20	+0	-0.018	+0	-0.13	+0.25	-0.25	+0	-1.60
76.20	101.60	+0	-0.020	+0	-0.13	+0.25	-0.25	+0	-1.60
101.60	127.0	+0	-0.025	+0	-0.13	+0.25	-0.25	+0	-1.60

D Basic Outside Dia.		Allowable Deviation From D of Single Mean Dia., Dap		Allowable Deviation From Outer Ring Width C		Allowable Deviation from Lubrication Groove Width, C1	
Over	Incl.	High	Low	High	Low	High	Low
0.5000	1.7500	+0	-0.0005	+0	-0.005	+0.031	-0.031
1.7500	3.0000	+0	-0.0006	+0	-0.005	+0.031	-0.031
3.0000	4.6250	+0	-0.0008	+0	-0.005	+0.031	-0.031
4.6250	5.8750	+0	-0.0010	+0	-0.005	+0.031	-0.031

TABLE II – Oil Hole Data

Bore-Dash No.		Number of Holes	
Over	Incl.	Inner Ring	Outer Ring
2	5	None	2
5	10	2	4
10	80	4	4

REQUIREMENTS:

(H) 1. MATERIAL: Steel, MIL-S-8690, QQ-S-624, QQ-S-631, QQ-S-700, Fed Std No. 66, AISI/SAE Steel No. 50100, 51100, 52100

(H) 2. PLATING: Zinc-nickel in accordance with AMS 2417 Type 2, or cadmium plated in accordance with QQ-P-416, type II, class 2, to a thickness of .0003 inches, to .0006 inches.

3. MACHINE FINISH: ANSI/ASME B46.1 See Procurement Specification

4. LUBRICATION: Grease Conforming to MIL-G-81322 or MIL-C-23827 at suppliers option unless either specified on order.

5. The limit load rating listed can be defined as the maximum radial load which can be applied to a bearing without impairing the subsequent functioning of the bearing in airframe applications. The ultimate or static fracture load rating is not less than 1.5 times the limit load rating.

6. Remove all burrs and sharp corners

7. Dimensions to met after plating

NOTES:

1. This standard takes precedence over any other documents referenced herein.

2. Referenced documents are the issues in effect at the date of invitation for bid.

Form Approved OMB No 0704-0188

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

MILITARY SPECIFICATION SHEET

TITLE: BEARING, ROLLER, NEEDLE, SINGLE ROW, HEAVY DUTY, TYPE I, ANTIFRICTION, INCH

SPECIFICATION SHEET NUMBER: MS24461 REV H 05 DEC 94

SUPERSEDING MS24461G 16 JUN 77

AMSC- N/A FSC 3110

PREPARING ACTIVITY: NAVY-AS

CUSTODIANS: ARMY- AT NAVY- AS AIR FORCE- 99 DLA-

REVIEW: ARMY-MI, AF-84, DLA-IS

USER:

PROJECT NUMBER: 3110-0854

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Page 2 of 2

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:54Z
Check the source to verify that this is the current version before use.