INCH-POUND

MS27424B
24 September 2021
SUPERSEDING
MS27424A
12 December 2011

DETAIL SPECIFICATION SHEET

CLIP ASSEMBLY, COCKPIT UTILITY LIGHT

Inactive for new design after 31 August 2006.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-6484.

INTENDED USE:

1. The clip assembly is designed for use with MS17246-1 as an aid to cockpit personnel for holding maps and other in-flight references.

REQUIREMENTS:

1. Materials.

1.1 Clip halves. Clip halves shall be manufactured from steel conforming to ASTM-A606/A606M, type 2 or type 4, cold-rolled, condition as-rolled.


1.2 Spring. The spring shall be manufactured from steel wire conforming to ASTM-A228/A228M.

1.3 Shaft. The shaft shall be manufactured from brass, C36000 or C36010, temper HO2, conforming to ASTM-B16/B16M.

2. Finish. Material finish shall be best practice for application. If desired, cadmium plating conforming to type I, class 1, of SAE-AMS-QQ-P-416 may be used.

3. Design. The design of the clip assembly shall be as shown in figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:24Z
Check the source to verify that this is the current version before use.

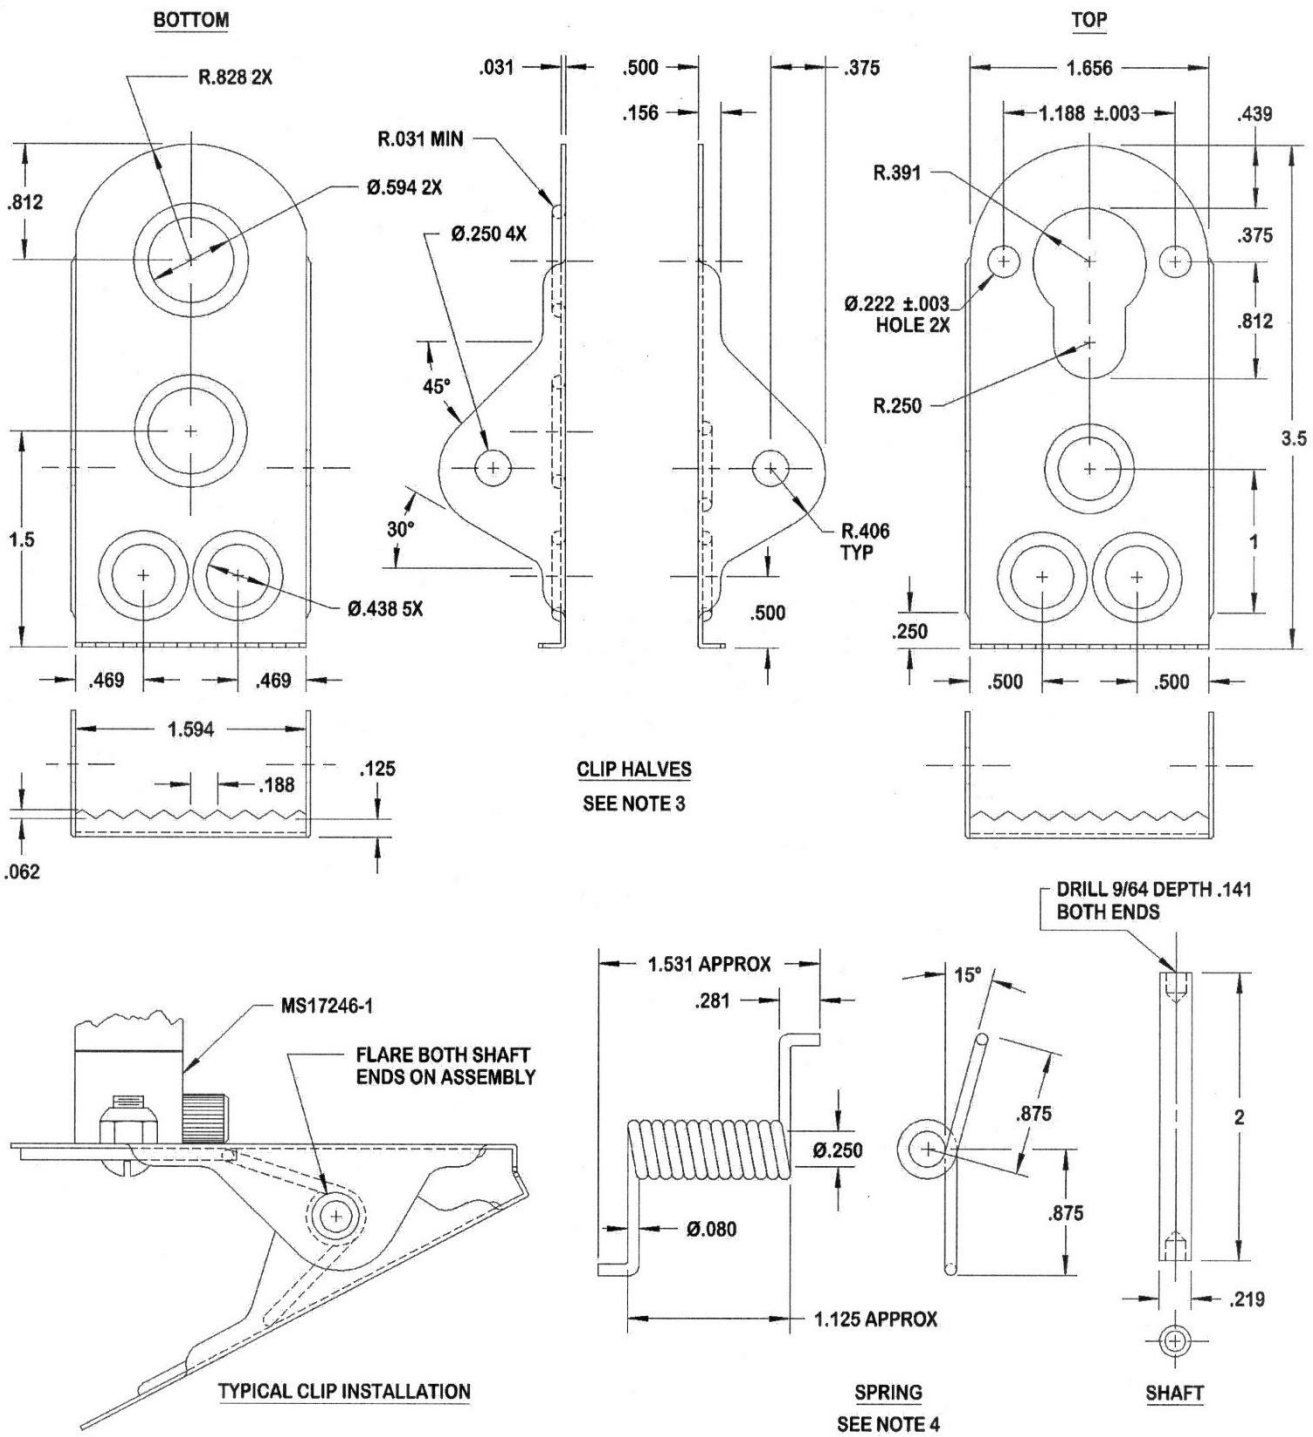

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified, tolerances ±0.015.
3. Unless otherwise specified, all bends R0.016. Remove all burrs.
4. 13 turns close-wound. Heat spring 500 to 550 ºF (260 to 288 ºC) for 20 minutes after forming.

FIGURE 1. Clip assembly, cockpit utility light.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:24Z
Check the source to verify that this is the current version before use.

4. Marking. The MS part number and the manufacturer's identification shall be marked on the clip assembly in accordance with MIL-STD-130.

NOTES:

1. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence.

2. Unless otherwise specified, issues of referenced documents are those in effect at the time of solicitation.

3. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

4. This specification is not intended to limit construction to features other than as shown herein, by dimensions, notations, and referenced documents.

Referenced documents. In addition to the MIL-DTL-6484 (procurement specification), this document references the following:

ASTM-A228/A228M
ASTM-A606/A606M
ASTM-B16/B16M
MIL-STD-130
MS17246
SAE-AMS-QQ-P-416

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Navy - AS
DLA - GS

Preparing Activity:
DLA - GS2

(Project 6220-2021-005)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:24Z
Check the source to verify that this is the current version before use.