
FED. SUP CLASS
2620

NOTE: ALL DIMENSIONS ARE IN INCHES

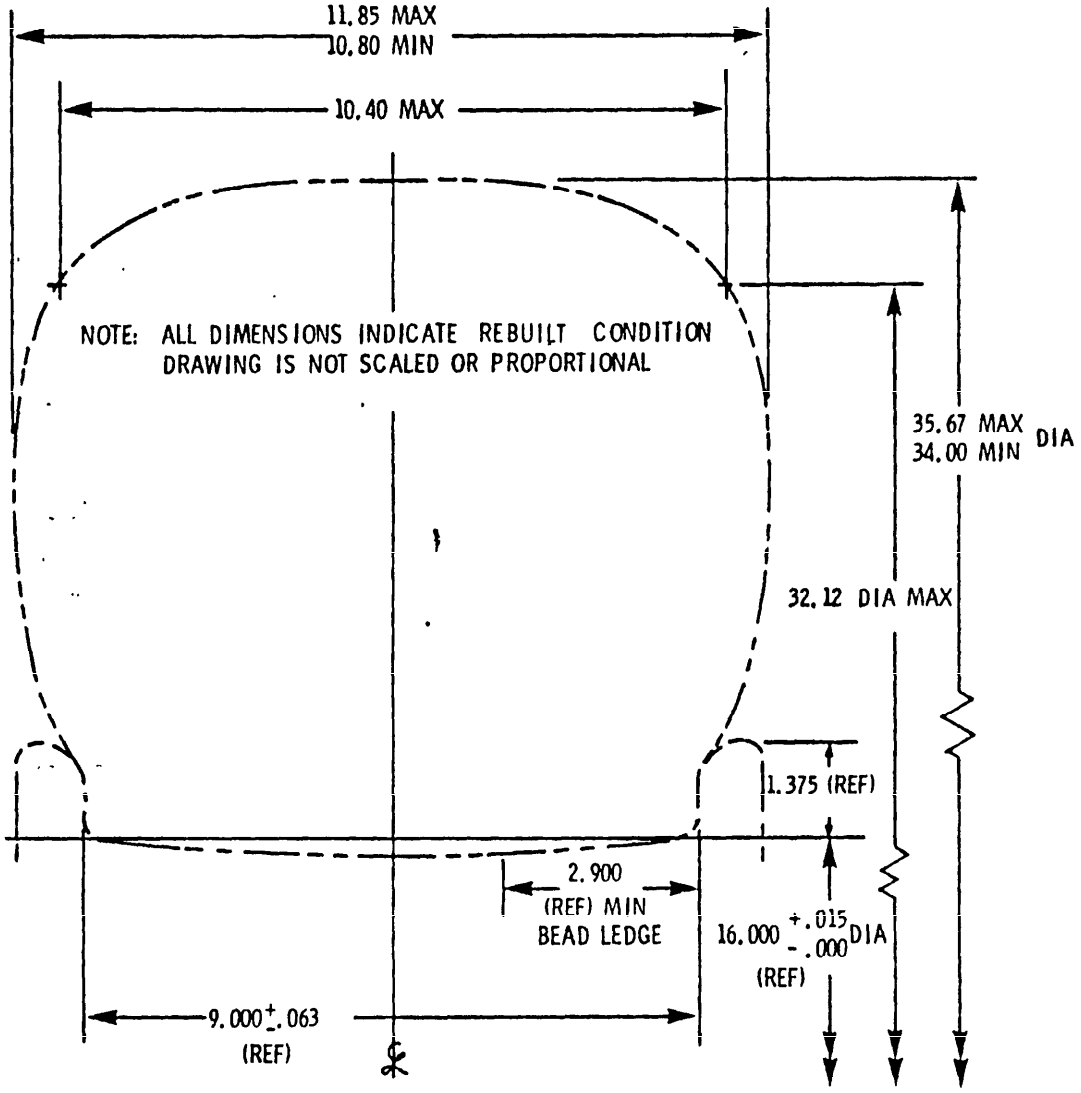


Ⓑ ENTIRE STANDARD REVISED

FIGURE 1

APPROVED 21 DEC 1970 REVISED Ⓐ 1 APRIL 1978 Ⓑ 30 March 1981

| | | |
|---|---|---|
| P.A. 99 Other Cust | TITLE TIRE-PNEUMATIC REBUILT, TYPE VII 36X11.22 PR | MILITARY STANDARD MS 27817 (USAF) |
| PROCUREMENT SPECIFICATION | SUPERSEDES | SHEET 1 OF 3 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:52Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2620

## GENERAL NOTES

1. ANY DEVIATION FROM GIVEN DIMENSIONS MUST BE AUTHORIZED BY WRITTEN APPROVAL OF THE PROCURING AGENCY. DIMENSIONS CALLED OUT ARE AFTER REBUILDING

2. REFERENCE TO ANY SPECIFICATION HEREIN SHOULD BE CONSTRUED AS REFERENCE TO THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BIDS.

3. THE TIRE QUALITY ASSURANCE SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF MIL-R-7726.

4. WHERE CONFLICT EXISTS BETWEEN THIS STANDARD AND ANY CIVIL REGULATION OR OTHER MILITARY SPECIFICATIONS, THE REQUIREMENTS OF THIS STANDARD SHALL APPLY.

## TIRE NOTES

1. THE REBUILT TIRE SHALL CONFORM TO THE APPLICABLE REQUIREMENTS OF MIL-T-5041, MIL-R-7726, AND FAA REQUIREMENTS TSO-C-62b, CAR4B AND CAM 18.30-9(b)(3).

| SIZE | REBUILT PLY RATING | STATIC LOAD (LBS) | INFLATION PRESSURE (PSI) RATED | BEAD WIDTH MAX (IN) | WEIGHT MAX (LBS) | STATIC UNBALANCE MAX (IN. OZ) | TREAD | MOLD SKID DEPTH (MIN) (IN) |
|---|---|---|---|---|---|---|---|---|
| 36X11 | 22 | 23,300 | 200 | 2.70 | 100 | 16 | RIB | .28 |

2. THE TIRE SHALL SATSIFACTORILY WITHSTAND 55 CYCLES OF TESTS 2.a, 2.b, 2.c, and 2.d THE SEQUENCE IS OPTIONAL (A TOTAL OF 220 CYCLES).

a. TAXI-TAKE-OFF TEST:

(1) THE TIRE SHALL BE LANDED AGAINST A STATIONARY FLYWHEEL AND A LOAD OF 23,300 POUNDS SHALL BE APPLIED. THIS LOAD SHALL BE MAINTAINED THROUGHOUT THE TEST UNLESS OTHERWISE SPECIFIED.

(2) IMMEDIATELY AFTER LOAD APPLICATION, ACCELERATE THE FLYWHEEL UNIFORMLY TO 40 MPH.

(3) THE TIRE SHALL THEN BE ROLLED FOR A DISTANCE OF 10,000 FT ± 200 FT AT 40 MPH.

(4) THE FLYWHEEL SHALL BE STOPPED, KEEPING THE LOAD ON THE TIRE.

(5) THE LOADED FLYWHEEL SHALL THEN BE ACCELERATED AT 9 FT/SEC/SEC TO UNLANDING SPEED OF 200 MPH IN ACCORDANCE WITH THE FOLLOWING LOAD SCHEDULE:

(a) MAINTAIN 23,300 POUND LOAD FOR THE FIRST 10 SECONDS.

(b) DECREASE THE LOAD LINEARLY WITH TIME DURING THE NEXT 22 TO 23 SECONDS TO 0 LOAD AT POINT OF UNLANDING.

(6) THE TOTAL DISTANCE TRAVELED IN THE TAXI AND TAKE OFF CYCLE IS APPROXIMATELY 14,800 FT OR 2.80 MILES.

b. LANDING-TAXI TEST:

(1) LAND THE TIRE AGAINST A FLYWHEEL ROTATING AT A PERIPHERAL SPEED OF 138 MPH.

(2) DECELERATE THE FLYWHEEL AT AN AVERAGE RATE OF 8.0 FT/SEC/SEC FROM 138 MPH TO 20 MPH, AT THE SAME TIME APPLY LOAD IN THE FOLLOWING SCHEDULE:

(a) INCREASE THE LOAD LINEARLY WITH TIME DURING THE INITIAL 3 TO 4 SECONDS AFTER LANDING FROM 0 TO 18,940 POUNDS.

(b) ROLL THE TEST TIRE AT 18,940 POUNDS, UNTIL THE FLYWHEEL HAS BEEN DECELERATED TO 20 MPH, COMPLETING A TOTAL DISTANCE OF 2,500 FT ± 200 FT.

(3) WITHOUT UNLANDING OR UNLOADING THE TIRE, INCREASE THE FLYWHEEL SPEED TO 30 MPH AND ROLL THE TIRE FOR AN ADDITIONAL DISTANCE OF 10,000 FT ± 200 FT.

(4) UNLAND THE TEST TIRE.

(5) THE TOTAL DISTANCE TRAVELED IN THE LANDING-TAXI TEST IS 12,500 FT or 2.37 MILES.

c. TAXI AND OUTBOARD CAMBER TEST:

(1) ACCELERATE THE FLYWHEEL TO 40 MPH AND MAINTAIN THIS SPEED THROUGHOUT THIS PORTION OF THE TEST.

(2) LAND THE TIRE AGAINST THE ROTATING FLYWHEEL IN A POSITION OF 6° OUTBOARD CAMBER, ACHIEVED ON A SKEWED CARRIAGE, WITH THE LOAD APPLIED IN ACCORDANCE WITH THE FOLLOWING LOAD SCHEDULE:

(a) INCREASE THE CARRIAGE LOAD LINEARLY WITH TIME FROM 0 TO 12,000 POUNDS DURING THE FIRST 1.5 SECONDS.

APPROVED 21 DEC 1970 REVISED (B) FOR CHANGES SEE SHEETS 1, 2, & 3

This military standard is approved for use by Code 99, (Department of the Air Force) and is available for use by all departments and agencies of the Department of Defense.

| P.A. 99 | TITLE: TIRE - PNEUMATIC REBUILT, TYPE VII 36 X 11 / 22 PR | MILITARY STANDARD |
|---|---|---|
| Other Cust | | MS 27817 (USAF) |
| PROCUREMENT SPECIFICATION: MIL-R-7726 | SUPERSEDES: AF DWG NO. 66D32270 | SHEET 2 OF 3 |

Source: https://assist.dla.mil -- Downloaded: 20240-23T16:52Z
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 66 672-1 (Limited coordination)
EDITION OF 1 SEP 57 MAY BE USED.

(b) FURTHER INCREASE THE CARRIAGE LOAD TO 23,300 POUNDS WITHIN 2.5 to 3, SECONDS AFTER LANDING.

(c) MAINTAIN 23,300 POUNDS LOAD UNTIL A TOTAL DISTANCE OF 1,900 FEET HAS BEEN COVERED.

d. TAXI AND INBOARD CAMBER TEST.

(1) LOAD THE SAME AS c., ABOVE, EXCEPT THAT THE TIRE SHOULD BE CAMBERED 6° INBOARD.

(2) THE DISTANCE COVERED SHALL ALSO BE 1,900 FEET.

3. EVERY 10TH CYCLE OF TEST 2.b, ABOVE, SHOULD BE CONDUCTED WITH THE FOLLOWING LOAD SCHEDULE.

a. INCREASE THE LOAD LINEARLY WITH TIME DURING THE INITIAL 3 TO 4 SECONDS AFTER LANDING FROM 0 TO 25,540 POUNDS.

b. ROLL THE TEST TIRE AT 25,540 POUNDS UNTIL THE FLYWHEEL HAS BEEN DECELERATED TO 20 MPH, COMPLETING A TOTAL DISTANCE OF 2,500 FEET ± 200 FT.

4. CONCLUDE THE DYNAMIC TESTING OF THE TIRE WITH THE FOLLOWING SEQUENCE:

ABORTED TAKE-OFF TEST:

a. THE TIRE SHALL BE LANDED AGAINST A STATIONARY FLYWHEEL AND A LOAD OF 23,300 POUNDS SHALL BE APPLIED.

b. IMMEDIATELY AFTER LOAD APPLICATION, ACCELERATE THE FLYWHEEL AT 9FT/SEC to 200 MPH, IN ACCORDANCE WITH THE FOLLOWING LOAD SCHEDULE

(1) MAINTAIN 23,300 POUND LOAD FOR THE FIRST 10 SECONDS.

(2) DECREASE THE LOAD LINEARLY WITH TIME DURING THE NEXT 22 TO 23 SECONDS TO 0 LOAD.

c. THEN DECELERATE THE FLYWHEEL FROM 200 MPH to 0 MPH AT THE RATE OF 10 FT/SEC IN ACCORDANCE WITH THE FOLLOWING LOAD SCHEDULE.

(1) INCREASE LOAD FROM 0 TO 34,950 POUNDS IN 4 SECONDS AND MAINTAIN UNTIL 0 MPH IS REACHED.

5. THE ABOVE TESTS SHALL BE COMPLETED WITHOUT EVIDENCE OF FAILURE.

6. THE TREAD PATTERN SHALL HAVE A MINIMUM OF 3 AND A MAXIMUM OF 5 GROOVES. A MINIMUM OF 3 GROOVES SHALL BE WITHIN THE CONTACT AREA OF THE FOOTPRINT TAKEN AT 60% OF THE MAXIMUM STATIC LOAD AT RATED INFLATION PRESSURE. THE MOLD GROOVE WIDTH SHALL BE A MINIMUM OF 0.25 INCH WHEN MEASURED AT 50% OF THE MOLD GROOVE DEPTH. THE MAXIMUM CENTER RIB WIDTH OF THE UNINFLATED TIRE SHALL NOT EXCEED 2.0 INCHES. ALL OF THE ABOVE SHALL BE REPORTED IN THE QUALIFICATION TEST REPORT.

APPROVED 21 DEC 1970 REVISED (B) FOR CHANGES SEE SHEETS 1, 2, & 3



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:52Z
Check the source to verify that this is the current version before use.