INCH-POUND

MS3124G
31 October 2011
SUPERSEDING
MS3124F
07 November 2007


DETAIL SPECIFICATION SHEET


CONNECTORS, RECEPTACLE, ELECTRIC, CRIMP TYPE, REAR MOUNTING, JAM NUT, BAYONET COUPLING, SERIES 1, CLASSES E, F AND P

Inactive for new design after 5 September 1975.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-26482.

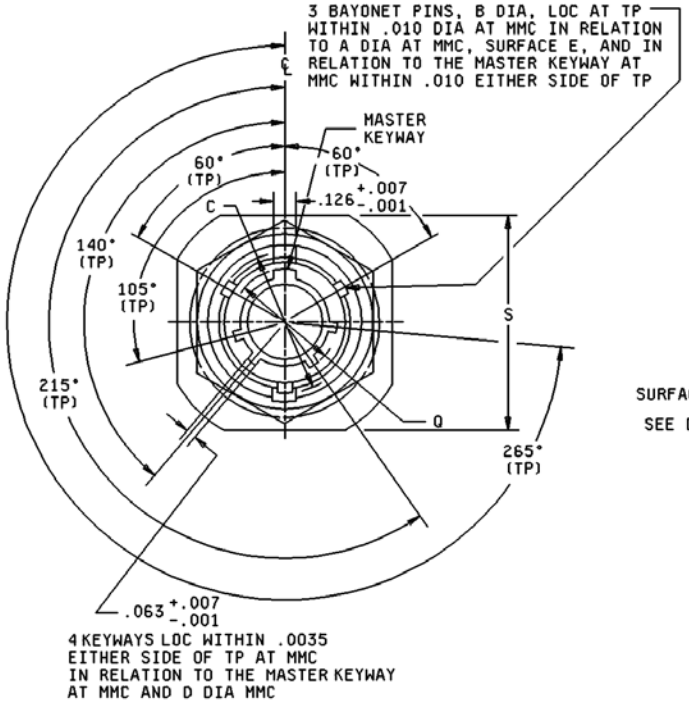

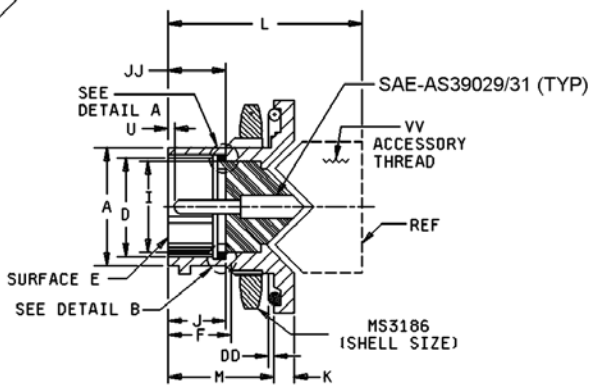

Inches	mm
.001	0.03
.0035	0.09
.007	0.18
.010	0.25
.063	1.60
.126	3.20


STYLE P (PIN INSERT)

FIGURE 1. Receptacle, dimensions, classes E, F and P.

AMSC N/A

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

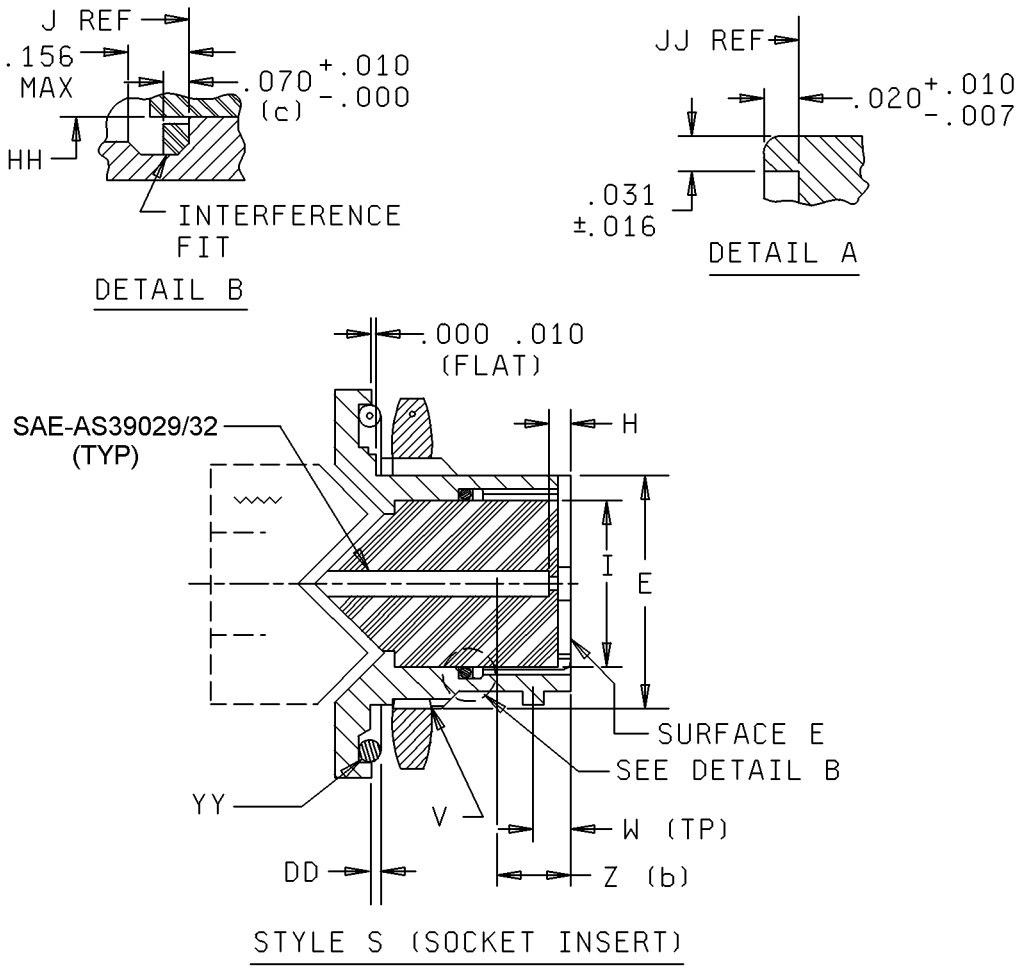

Inches	mm
.007	0.18
.010	0.25
.020	0.51
.031	0.79
.070	1.78
.156	3.96

FIGURE 1. Receptacle, dimensions, classes E, F, and P - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.



PANEL MTG
DIMS REF

Shell size	DD +.011 O-ring protection	HH max ID gasket	FF +.010 -.005 panel mounting hole	GG +.010 -.005 panel flat location
8	.023 (0.58)	.329 (8.36)	.572 (14.53)	.540 (13.72)
10		.457 (11.61)	.697 (17.70)	.665 (16.89)
12		.564 (14.33)	.885 (22.48)	.828 (21.03)
14		.689 (17.50)	1.010 (25.65)	.952 (24.18)
16		.814 (20.68)	1.135 (28.83)	1.076 (27.33)
18		.907 (23.04)	1.260 (32.00)	1.201 (30.51)
20	.028 (0.71)	1.032 (26.21)	1.385 (35.18)	1.326 (33.68)
22		1.164 (29.57)	1.510 (38.35)	1.451 (36.86)
24		1.259 (31.98)	1.635 (41.53)	1.576 (40.03)

FIGURE 1. Receptacle, dimensions, classes E, F and P – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

Shell size	A dia +.001 -.005 OD	B dia +.006 -.002 bay pin	C dia +.000 -.016 over bay pins	D dia +.005 -.001 ID	E +.000 -.010 mounting flat	F min mounting thread location	G +.000 -.032 across flange corner
8	.473 (12.01)	.078 (1.98)	.563 (14.30)	.362 (9.19)	.530 (13.46)	.384 (9.75)	1.078 (27.38)
10	.590 (14.99)		.680 (17.27)	.490 (12.45)	.655 (16.64)		1.203 (30.56)
12	.750 (19.05)		.859 (21.82)	.607 (15.42)	.818 (20.78)		1.391 (35.33)
14	.875 (22.23)		.984 (24.99)	.732 (18.59)	.942 (23.93)		1.516 (38.51)
16	1.000 (25.40)		1.108 (28.14)	.857 (21.77)	1.066 (27.08)		1.641 (41.68)
18	1.125 (28.58)		1.233 (31.32)	.962 (24.43)	1.191 (30.25)		1.766 (44.86)
20	1.250 (31.75)		1.358 (34.49)	1.087 (27.61)	1.316 (33.43)	.446 (11.33)	1.954 (49.63)
22	1.375 (34.93)		1.483 (37.67)	1.212 (30.78)	1.441 (36.60)		2.078 (52.78)
24	1.500 (38.10)	.125 (3.18)	1.610 (40.89)	1.337 (33.96)	1.566 (39.78)	.479 (12.17)	2.203 (55.96)

FIGURE 1. Receptacle, dimensions, classes E, F and P – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

Shell size	H + .000 - .020 socket insert location	I dia max insert	J + .010 packing location	JJ + .000 - .020 pin insert location	K ± .016 thick mounting flange	M + .031 - .000 mounting flange location
8	.025 (0.64)	.285 (7.24)	.382 (9.70)	.332 (8.43)	.117 (2.97)	.691 (17.55)
10		.402 (10.21)				
12		.516 (13.11)				
14		.641 (16.28)				
16		.766 (19.46)				
18		.855 (21.72)				
20	.087 (2.21)	.980 (24.89)	.444 (11.28)	.394 (10.01)	.148 (3.76)	.879 (22.33)
22		1.105 (28.07)				
24		1.229 (31.22)				.912 (23.16)

FIGURE 1. Receptacle, dimensions, classes E, F and P – Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

Shell size	P panel thickness (ref)		Q dia +.005 -.006 over keyways	S max length side	U +.010 -.020 pin contact location	V class 2A mounting thread
	min	max				
8	.062 (1.57)	.125 (3.18)	.412 (10.46)	.954 (24.23)	.085 (2.16)	9/16-24
10			.540 (13.72)	1.078 (27.38)		11/16-24
12			.689 (17.50)	1.266 (32.16)		7/8-20
14			.814 (20.68)	1.391 (35.33)		1-20
16			.939 (23.85)	1.516 (38.51)		1-1/8-18
18			1.039 (26.39)	1.641 (41.68)		1-1/4-18
20		.250 (6.35)	1.164 (29.57)	1.828 (46.63)	.147 (3.73)	1-3/8-18
22			1.289 (32.74)	1.954 (49.63)		1-1/2-18
24			1.414 (35.92)	2.078 (52.78)		1-5/8-18

Shell size	W (TP) bay pin location	Z (b) + .000 - .078 socket contact spring location	YY O-ring seal MS29513- (per SAE-AS29513)	V V class 2B accessory thread
8	.100 (2.54)	.153 (3.89)	017	5/8-24
10			019	3/4-20
12			022	7/8-20
14			024	1-20
16			026	1-1/8-18
18			028	1-1/4-18
20		.215 (5.46)	128	1-3/8-18
22			130	1-1/2-18
24	.109 (2.77)		132	1-5/8-18

FIGURE 1. Receptacle, dimensions, classes E, F and P – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

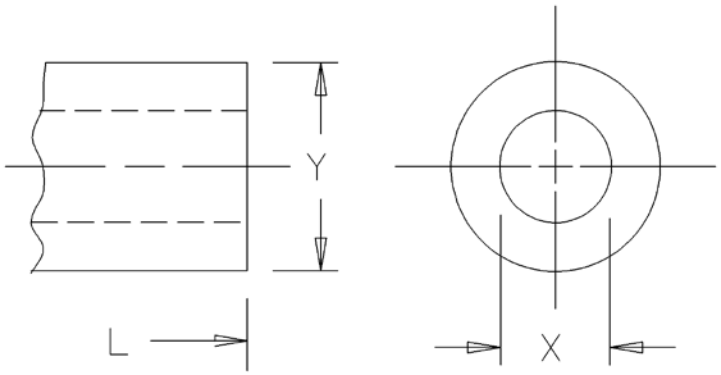


Class E


Dimensions – class E only			
Shell size	L max over-all length	X dia min ID	Y dia max OD
8	1.552 (39.42)	.259 (6.58)	.750 (19.05)
10		.359 (9.12)	.875 (22.23)
12		.469 (11.91)	1.000 (25.40)
14		.589 (14.96)	1.125 (28.58)
16		.717 (18.21)	1.250 (31.75)
18		.779 (19.79)	1.375 (34.93)
20	1.709 (43.41)	.901 (22.89)	1.531 (38.89)
22		1.009 (25.63)	1.656 (42.06)
24		1.123 (28.52)	1.781 (45.24)

FIGURE 1. Receptacle, dimensions, classes E, F and P – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

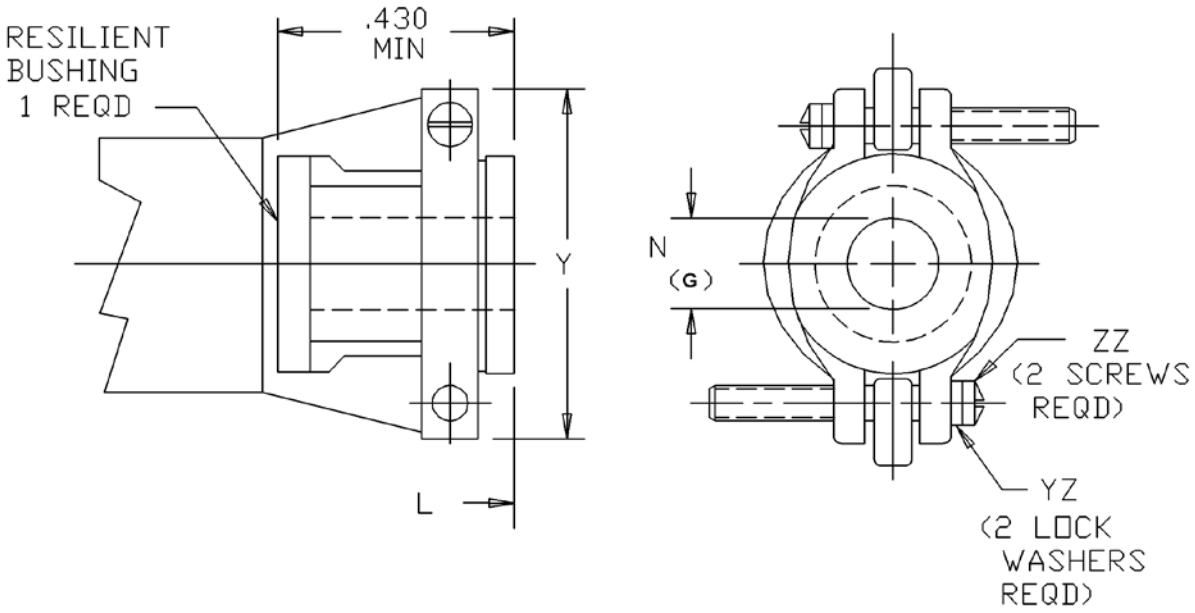

Class F

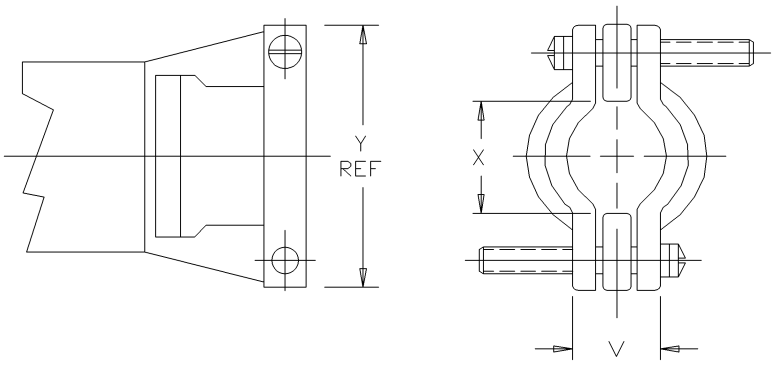

Inch mm
.430 10.92

Class F, bushing removed

FIGURE 1. Receptacle, dimensions, classes E, F and P – Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

Dimensions, class F only				
Shell size	L max over-all length	X dla min open	Y max	V max closed
8	2.422 (61.52)	.234 (5.94)	.828 (21.03)	.187 (4.75)
10		.297 (7.54)	.891 (22.63)	.187 (4.75)
12		.422 (10.72)	1.016 (25.81)	.281 (7.14)
14		.547 (13.89)	1.141 (28.98)	.325 (8.26)
16	2.537 (64.44)	.609 (15.47)	1.203 (30.56)	.356 (9.04)
18		.734 (18.64)	1.469 (37.31)	.456 (11.58)
20	2.824 (71.73)			.519 (13.18)
22		.922 (23.42)	1.656 (42.06)	
24	2.900 (73.66)	.984 (24.99)	1.750 (44.45)	.657 (16.69)

Dimensions, class F only			
Shell size	N free dia ± .010	ZZ screw threads	YZ lockwashers NASM35338 NASM35333
8	.110 (2.79)	6-32 UNC	NASM35338 -98 or -41 NASM35333 -105 or -37
10	.173 (4.39)		
12	.297 (7.54)		
14	.360 (9.14)		
16	.485 (12.32)		
18	.610 (15.49)	8-32 UNC	NASM35338 -99 or -42 NASM35333 -106 or -38
20	.610 (15.49)		
22	.735 (18.67)		
24	.785 (19.94)		

FIGURE 1. Receptacle, dimensions, classes E, F and P – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

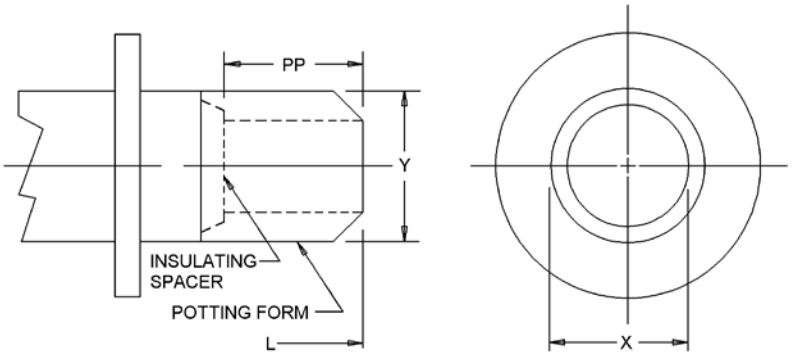

Class P

Dimensions – class P only				
Shell size	L max over-all length	X dia min	Y dia max	PP min
8	1.675 (42.55)	.317 (8.05)	.608 (15.44)	.250 (6.35)
10		.434 (11.02)	.734 (18.64)	
12		.548 (13.92)	.858 (21.79)	
14		.673 (17.09)	.984 (24.99)	
16		.798 (20.27)	1.110 (28.19)	
18		.899 (22.83)	1.234 (31.34)	
20	1.963 (49.86)	1.024 (26.01)	1.360 (34.54)	
22	1.963 (49.86)	1.149 (29.18)	1.484 (37.69)	
24	2.025 (51.44)	1.274 (32.36)	1.610 (40.89)	

NOTES:

1. Dimensions are in inches. Metric equivalents are given for information only.
2. Distance between end of shell and the point at which a gage pin having the same basic diameter as the mating contact and a square face first engages socket contact spring.
3. Packing material shall meet the requirements of ASTM-D2000.
4. True position (TP) tolerances specified are in accordance with ASME Y14.5M.
5. For class F: Use SAE-AS85049/139 bushing if reduced opening is required. Lockwashers may be captivated.

FIGURE 1. Receptacle, dimensions, classes E, F and P – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Connector mating: This connector mates with MS3121 and MS3126.

Insert arrangement shall be in accordance with MIL-STD-1669.

Sealing member: Bonded to vitreous insert.


Packing material shall meet the requirements of ASTM-D2000.

Finishes: A finish designator shall not be included in the PIN when finish W is required. See MIL-DTL-26482 for alternative finishes D, T and Z for classes E, F and P.

Material:

a. Shell - aluminum alloy.
b. Bayonet pins (B dia) - stainless steel, passivated.

Part or Identifying Number (PIN) example:

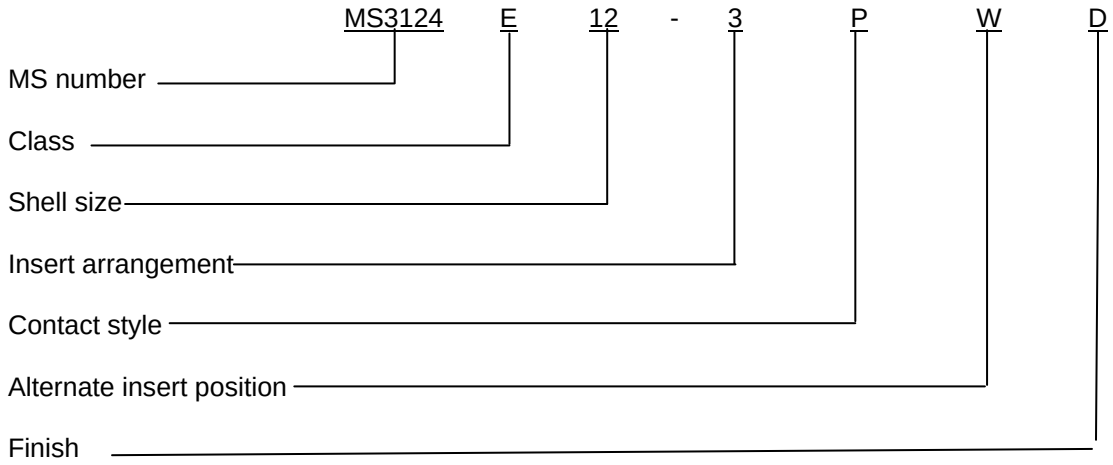

Note: When finish W is required, no finish designator is used (class W is the default finish).

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-26482, this document references the following:

MS3121
MS3126
MS3186
MIL-STD-1669
ASME Y14.5M
ASTM-D2000
SAE-AS29513
SAE-AS39029/31
SAE-AS39029/32
SAE-AS85049/139
NASM35333
NASM35338

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2011-111)

Review activities:
Army - AR, MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.