
FED. SUP CLASS 5305

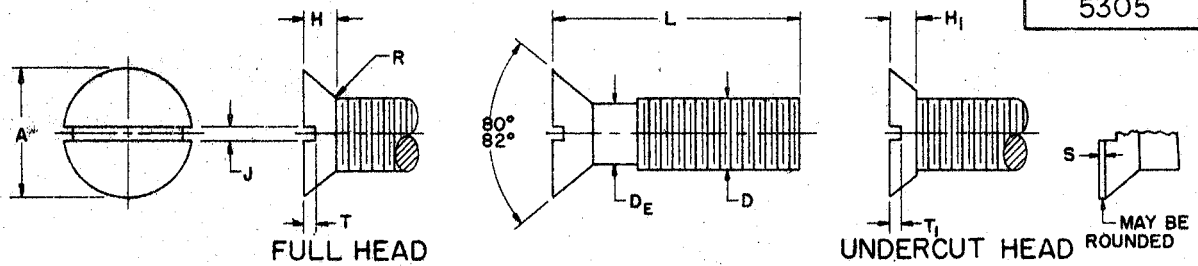

FULL HEAD — UNDERCUT HEAD

	Nominal Size D		#0 (.0600)	#1 (.0730)	#2 (.0860)	#4 (.1120)	#6 (.1380)	#8 (.1640)	#10 (.1900)	1/4 (.2500)
	Threads Per Inch		80NF	72NF	64NF	48NF	40NF	36NF	32NF	28UNF
	Body Diameter D_E	Max	.0600	.0730	.0860	.1120	.1380	.1640	.1900	.2500
		Min	.0496	.0615	.0733	.0954	.1184	.1424	.1658	.2225
	Head Diameter A	Max Sharp	.119	.146	.172	.225	.279	.332	.385	.507
		Min Sharp	.105	.130	.156	.207	.257	.308	.359	.477
		Abs Min	.101	.126	.150	.200	.249	.300	.348	.462
	Slot Width J	Max	.023	.026	.031	.039	.048	.054	.060	.075
		Min	.016	.019	.023	.031	.039	.045	.050	.064
	Flat S	Max	.002	.003	.003	.004	.005	.006	.007	.009
	Radius R	Max	.025	.027	.031	.041	.050	.055	.062	.071
Full Head	Head Height H	Max	.035	.043	.051	.067	.083	.100	.116	.153
		Min	.026	.033	.040	.055	.069	.084	.098	.131
	Slot Depth T	Max	.015	.019	.023	.030	.038	.045	.053	.070
		Min	.010	.012	.015	.020	.024	.029	.034	.046
Undercut Head	Head Height H_1	Max	.026	.032	.037	.048	.060	.071	.083	.108
		Min	.017	.022	.026	.036	.046	.055	.065	.086
	Slot Depth T_1	Max	.012	.016	.019	.025	.032	.037	.044	.058
		Min	.010	.012	.015	.020	.024	.029	.034	.046

THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.

Length L	Tolerance	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.
1/8		1	6	13	22	33	48		
3/16		2	7	14	23	34	49	67	
1/4		3	8	15	24	35	50	68	85
5/16		4	9	16	25	36	51	69	86
3/8	+0 -1/32	5	10	17	26	37	52	70	87
7/16			11	18	27	38	53	71	88
1/2			12	19	28	39	54	72	89
5/8				20	29	40	55	73	90
3/4				21	30	41	56	74	91
7/8					31	42	57	75	92
1					32	43	58	76	93
1-1/4	+0 -1/16					44	59	77	94
1-1/2						45	60	78	95
1-3/4						46	61	79	96
2						47	62	80	97
2-1/4	+0 -3/32						63	81	98
2-1/2							64	82	99
2-3/4							65	83	100
3							66	84	101

Minimum complete thread length of 1-3/4.

Ⓐ CANCELLED SEE SHEET 2

MATERIAL: Carbon steel, Specification QQ-W-409 or QQ-S-633, except Bessemer composition; 55,000 PSI minimum ultimate tensile strength.

FINISH: Cadmium plated, Specification QQ-P-416, type II, class C.

THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services Handbook H-28.

NOTES:
(1) Referenced documents of issue in effect on date of invitation for bids shall apply.
(2) In case of conflict with any referenced document, this standard will govern.
(3) The MS part number consists of the MS sheet number, plus the dash number. Example: MS 35240-1.
(4) Sizes above dotted line have undercut head.
(5) All dimensions in inches.

Ⓐ For changes see sheets 1 and 2.

APPROVED FEB 9, 1954 REVISED Ⓐ 5 APRIL 1962

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ORD
Other Cust SHIPS

TITLE
SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, CARBON STEEL, CADMIUM PLATED, NF-2A AND UNF-2A.

MILITARY STANDARD
MS 35240

PROCUREMENT SPECIFICATION FF-S-92

SUPERSEDES

SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS 5305

				5/16 (.3125)	3/8 (.3750)	7/16 (.4375)	1/2 (.5000)	9/16 (.5625)	5/8 (.6250)	3/4 (.7500)
NOMINAL SIZE D										
THREADS PER INCH				24UNF	24UNF	20UNF	20UNF	18UNF	18UNF	16UNF
BODY DIAMETER D_E		MAX		.3125	.3750	.4375	.5000	.5625	.6250	.7500
		MIN		.2806	.3430	.3995	.4619	.5205	.5828	.7029
HEAD DIAMETER A		MAX SHARP		.635	.762	.812	.875	1.000	1.125	1.375
		MIN SHARP		.600	.722	.771	.831	.950	1.069	1.306
		ABS MIN		.581	.700	.743	.802	.919	1.035	1.267
SLOT WIDTH J		MAX		.084	.094	.094	.106	.118	.133	.149
		MIN		.072	.081	.081	.091	.102	.116	.131
FLAT S		MAX		.011	.013	.016	.018	.020	.023	.027
RADIUS R		MAX		.083	.083	.100	.100	.110	.110	.125
FULL HEAD	HEAD HEIGHT H	MAX		.191	.230	.223	.223	.260	.298	.372
		MIN		.165	.200	.190	.186	.220	.253	.319
	SLOT DEPTH T	MAX		.088	.106	.103	.103	.120	.137	.171
		MIN		.058	.070	.066	.065	.077	.088	.111
UNDERCUT HEAD	HEAD HEIGHT H_1	MAX		.135	.162	.156	.160	.185	.212	.264
		MIN		.109	.132	.126	.123	.145	.167	.211
	SLOT DEPTH T_1	MAX		.073	.088	.085	.085	.100	.114	.142
		MIN		.058	.070	.066	.065	.077	.088	.111

LENGTH L	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
1/8					Ⓐ CANCELLED SEE NOTE			
3/16								
1/4								
5/16								
3/8	+0 -1/32	102						
7/16		103						
1/2		104	117					
5/8		105	118	130				
3/4		106	119	131	142			
7/8		107	120	132	143	153		
1		108	121	133	144	154	163	
1-1/4	+0 -1/16	109	122	134	145	155	164	173
1-1/2		110	123	135	146	156	165	174
1-3/4		111	124	136	147	157	166	175
2		112	125	137	148	158	167	176
2-1/4	+0 -3/32	113	126	138	149	159	168	177
2-1/2		114	127	139	150	160	169	178
2-3/4		115	128	140	151	161	170	179
3		116	129	141	152	162	171	180
							172	181

THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.

MINIMUM COMPLETE THREAD LENGTH OF 1-3/4.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: FOR ILLUSTRATION, MATERIAL, FINISH, AND OTHER PERTINENT DATA SEE SHEET 1.

Ⓐ CANCELLED AFTER 7 May 1962 USE MS 35191. INTERCHANGEABILITY RELATIONSHIP-MS 35191 CAN REPLACE THE CANCELLED SCREWS OF THE SAME SIZE. THE CANCELLED MS 35240 CANNOT ALWAYS REPLACE MS 35191 AND SHOULD BE USED UNTIL EXISTING STOCK IS DEPLETED. THEN USE ONLY THE SUPERSEDING MS SCREWS OF THE SAME SIZE FOR DESIGN AND REPLACEMENT.

APPROVED FEB 9, 1954 REVISED Ⓐ FOR CHANGES SEE SHEETS 1 AND 2.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	ORD
Other Cust	SHIPS

TITLE: SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, CARBON STEEL, CADMIUM PLATED, NF-2A AND UNF-2A

MILITARY STANDARD

MS 35240

PROCUREMENT SPECIFICATION FF-S-92

SUPERSEDES:

SHEET 2 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-03-17T17:12Z
Check the source to verify that this is the current version before use.