FED. SUP CLASS
5305

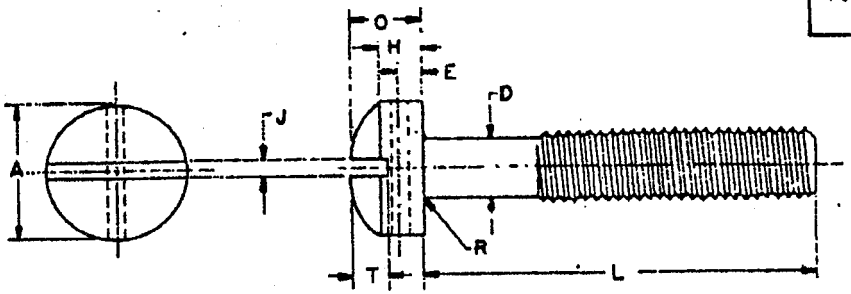


TABLE I

	NOMINAL SIZE		(#2) .086	(#4) .112	(#6) .138	(#8) .164	(#10) .190	(1/4) .250	(5/16) .3125	(3/8) .375
	THREADS PER INCH, UNF-2A		64	48	40	36	32	28	24	24
D	BODY DIAMETER	MAX	.0860	.1120	.1380	.1640	.1900	.2500	.3125	.3750
		MIN	.0733	.0954	.1164	.1424	.1658	.2225	.2806	.3430
A	HEAD DIAMETER	MAX	.140	.183	.226	.270	.313	.414	.518	.622
		MIN	.124	.166	.209	.250	.292	.389	.490	.590
H	HEAD SIDE HEIGHT	MAX	.062	.079	.096	.113	.130	.170	.211	.253
		MIN	.055	.072	.089	.106	.123	.161	.201	.242
O	TOTAL HEAD HEIGHT	MAX	.083	.107	.132	.156	.180	.237	.295	.355
		MIN	.070	.094	.118	.141	.165	.219	.276	.333
J	SLOT WIDTH	MAX	.031	.039	.048	.054	.060	.075	.084	.094
		MIN	.023	.031	.039	.045	.050	.064	.072	.081
T	SLOT DEPTH	MAX	.030	.038	.045	.065	.075	.102	.130	.154
		MIN	.022	.030	.035	.054	.064	.087	.110	.134
E	DRILL LOCATION	NOM	.026	.035	.043	.043	.043	.062	.078	.094
	DRILLED HOLE SIZE	NOM	.031	.037	.046	.046	.046	.062	.070	.070
R	RADIUS	MAX	.013	.017	.021	.025	.029	.038	.047	.056
	TENSILE STRENGTH, LBS-MIN		310	530	810	1180	1600	2910	4640	7020

L LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
.125		201	211	224	239				
.188		202	212	225	240	258			
.250		203	213	226	241	259			
.312		204	214	227	242	260	276		
.375		205	215	228	243	261	277	292	
.438	+0	206	216	229	244	262	278	293	
.500	-.031	207	217	230	245	263	279	294	307
.625		208	218	231	246	264	280	295	308
.750		209	219	232	247	265	281	296	309
.875		210	220	233	248	266	282	297	310
1.000			221	234	249	267	283	298	311
1.250			222	235	250	268	284	299	312
1.500	+0		223	236	251	269	285	300	313
1.750	-.062			237	252	270	286	301	314
2.000				238	253	271	287	302	315
2.250					254	272	288	303	316
2.500	+0				255	273	289	304	317
2.750	-.094				256	274	290	305	318
3.000					257	275	291	306	319
(C) 3.500							350		

(C) FOR CHANGES SEE SHEETS 1, 2, 3 and 4.

APPROVED 9 FEB 1954 REVISED (A) 16 APR 1965 (B) 14 JUN 1976 (C) 10 SEPT 1976

P.A. MC
Other Cust AS 99 (C)

TITLE
SCREW, MACHINE-DRILLED FILLISTER HEAD, SLOTTED, CORROSION RESISTING STEEL, PASSIVATED, UNF-2A

MILITARY STANDARD
MS35276

PROCUREMENT SPECIFICATION
FF-S-92

SUPERSEDES BCFX7.1, BCFX7.2, BCGX1.10, BCGX1.11, BCGX3 AND IN PART AN501, MS35361, MS35366, BCGX3.1, BCHX1 AND BCHX2.

SHEET 1 OF 4

Document Provided by IHS Downloaded: 2026-02-23T17:17:13Z
Check the source to verify that this is the current version before use.

NOTES:

1. MATERIAL: Steel, Corrosion Resisting, in accordance with Fed. Std. No. 66; AISI 302, 303, 304, 305, 310, or 384 (developed for cold heading), and having minimum ultimate tensile strength of 80,000 PSI.

2. TREATMENT: Passivation shall be in accordance with QQ-P-35.

3. MAGNETIC PERMEABILITY: These fasteners have a magnetic permeability of 2.0 maximum (air = 1.0) for a field strength of H = 200 oersteds using a magnetic indicator per MIL-I-17214.

4. THREADS: The threads shall be in accordance with Screw-Threads Standards for Federal Services, Handbook H-28.

5. THREAD LENGTH: Screws 2.00 inches long and shorter shall have complete threads extending to within two threads of the head, or closer if practicable. Longer screws shall have a minimum thread length of 1.50 inches.

6. DIMENSIONS: All dimensions are in inches unless otherwise specified.

7. PART NUMBER: The MS part number consists of the MS number, plus the dash number.
Example: MS35276-201

8. Drilled hole is to be approximately at right angles to the slot and may be permitted to break through the bottom of the slot. All sharp edges shall be removed.

9. Referenced documents shall be of the issue in effect on date of invitations for bid.

10. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

APPROVED 9 FEB 1954 REVISED © For previous changes see sheets 1, 2, and 3.

USER: SH, GL, MD, YD, PA, WV, NC

P A WC
Other Cust AS 99 ©

TITLE
SCREW, MACHINE-DRILLED FILLISTER HEAD, SLOTTED, CORROSION RESISTING STEEL, PASSIVATED, UNF-2A

MILITARY STANDARD
MS35276

PROCUREMENT SPECIFICATION
FF-S-92

SUPERSEDES BCFX7.1, BCFX7.2, BCGX1.10, BCGX1.11, BCGX3 AND IN PART AN501, MS35361, MS35366, BCGX3.1, BCHX1 AND BCHX2.

SHEET 1 OF 4

Document downloaded from mil-Downloaded: 2026-10-22T03:13Z
Check the source to verify that this is the current version before use.

DD FORM 672-1

TABLE II
INTERCHANGEABILITY TABLE

FED. SUP CLASS 5305

The screws covered by the dash numbers given in original issue of this standard and AN501, in part, are cancelled/inactivated after the approval date indicated on this document. Use the dash numbers given in the preceding sheets of this revision. The cancelled screws cannot always replace the new screws and should be used until existing stocks are depleted. Use only the new screws for design and replacement. Replacement shall be in accordance with this table.

PART NUMBERS		
CANCELLED		SUPERSEDED BY
MS35276-1		MS35276-201
-2		-202
-3		-203
-4		-204
-5		-205
-6		-206
-7		-207
-8		-208
-9		-209
-10		-210
-11		-211
-12		-212
-13		-213
-14		-214
-15		-215
-16		-216
-17		-217
-18		-218
-19		-219
-20		-220
-21		-221
-22		-222
-23		-223
-24		-224
-25		-225
-26		-226
-27		-227
-28		-228
-29		-229
-30		-230
-31		-231
-32		-232
-33		-233
-34		-234
-35		-235
-36		-236
-37		-237
-38		-238
-39		-239
-40		-240
-41		-241
-42		-242
-43		-243
-44		-244
-45		-245
-46		-246
-47		-247
-48		-248
-49		-249
-50		-250
-51		-251
-52		-252
-53		-253
-54		-254
-55		-255
-56		-256
-57		-257
-58		-258
-59	AN501-AD10-4	-259
-60	-AD10-5	-260
-61	-AD10-6	-261
-62	-AD10-7	-262
-63	-AD10-8	-263
-64	-AD10-10	-264

PART NUMBERS		
CANCELLED		SUPERSEDED BY
MS35276-65	AN501-AD10-12	MS35276-265
-66	-AD10-14	-266
-67	-AD10-16	-267
	-AD10-18	No Replacement
-68	-AD10-20	-268
	-AD10-22	No Replacement
-69	-AD10-24	-269
-70	-AD10-28	-270
-71	-AD10-32	-271
-72		-272
-73	-AD10-40	-273
-74		-274
-75	-AD10-48	-275
-76	-AD416-5	-276
-77	-AD416-6	-277
-78	-AD416-7	-278
-79	-AD416-8	-279
-80	-AD416-10	-280
-81	-AD416-12	-281
-82	-AD416-14	-282
-83	-AD416-16	-283
	-AD416-18	No Replacement
-84	-AD416-20	-284
	-AD416-22	No Replacement
-85	-AD416-24	-285
-86	-AD416-28	-286
-87	-AD416-32	-287
-88		-288
-89	-AD416-40	-289
-90		-290
-91	-AD416-48	-291
-92		-292
-93		-293
-94	-AD516-5	-294
-95	-AD516-10	-295
-96	-AD516-12	-296
-97	-AD516-14	-297
-98	-AD516-16	-298
	-AD516-18	No Replacement
-99	-AD516-20	-299
	-AD516-22	No Replacement
-100	-AD516-24	-300
-101	-AD516-28	-301
-102	-AD516-32	-302
-103		-303
-104	-AD516-40	-304
-105		-305
-106	-AD516-48	-306
-107	-AD616-8	-307
-108	-AD616-10	-308
-109	-AD616-12	-309
-110	-AD616-14	-310
-111	-AD616-16	-311
	-AD616-18	No Replacement
-112	-AD616-20	-312
	-AD616-22	No Replacement
-113	-AD616-24	-313
-114	-AD616-28	-314
-115	-AD616-32	-315
-116		-316
-117	-AD616-40	-317
-118		-318
-119	-AD616-48	-319

APPROVED FEB 9, 1954 REVISED (C) For changes see sheets 1, 2, 3 and 4.

P.A. WC
Other Cust AS 99 (C)

TITLE
SCREW, MACHINE-DRILLED FILLISTER HEAD, SLOTTED, CORROSION RESISTING STEEL, PASSIVATED, UNF-2A

MILITARY STANDARD
MS35276

PROCUREMENT SPECIFICATION FF-S-92

SUPERSEDES: BCFX7.1, BCFX7.2, BCGX1-10, BCGX1-11, BCGX3 AND IN PART ANSOL, MS35361, MS35366, BCGX3.1, BCHX1 AND BCHX2.

SHEET 3 OF 4

Source: https://assist.dla.mil - Downloaded: 2026-02-23T19:13Z
Check the source to verify that this is the current version before use.

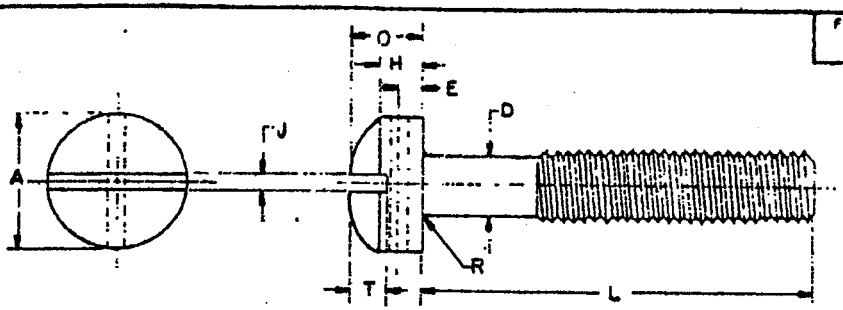


TABLE III
METRIC TRANSLATION OF TABLE I

	NOMINAL SIZE	MM	2.184	2.845	3.505	4.166	4.826	6.350	7.938	9.525
	PITCH		.40	.53	.64	.71	.79	.91	1.06	1.06
D	BODY DIAMETER	MAX MIN	2.184 1.862	2.845 2.423	3.505 3.007	4.166 3.617	4.826 4.211	6.350 5.652	7.938 7.127	9.525 8.712
A	HEAD DIAMETER	MAX MIN	3.556 3.150	4.648 4.216	5.740 5.283	6.856 6.350	7.950 7.417	10.516 9.881	13.157 12.446	15.799 14.996
H	HEAD SIDE HEIGHT	MAX MIN	1.575 1.397	2.007 1.829	2.438 2.261	2.870 2.692	3.302 3.124	4.318 4.069	5.359 5.105	6.426 6.147
O	TOTAL HEAD HEIGHT	MAX MIN	2.108 1.778	2.718 2.368	3.353 2.997	3.962 3.561	4.572 4.191	6.020 5.563	7.493 7.010	9.017 8.455
J	SLOT WIDTH	MAX MIN	.787 .584	.991 .787	1.219 .991	1.372 1.143	1.524 1.270	1.905 1.626	2.134 1.829	2.388 2.057
T	SLOT DEPTH	MAX MIN	.762 .559	.965 .762	1.143 .889	1.651 1.372	1.905 1.626	2.591 2.210	3.302 2.794	3.912 3.404
E	DRILL LOCATION	NOM	.660	.889	1.092	1.092	1.092	1.575	1.981	2.388
	DRILLED HOLE SIZE	NOM	.787	.940	1.168	1.168	1.168	1.575	1.778	1.778
R	RADIUS	MAX	.330	.432	.533	.635	.737	.965	1.194	1.422
	TENSILE STRENGTH, KN-MIN		1.399	2.375	3.630	5.288	7.171	13.043	20.797	31.465

L LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
3.175 4.775 6.350 7.925	±0 -.787	201 202 203 204	211 212 213 214	224 225 226 227	239 240 241 242	258 259 260	276		
9.525 11.125 12.700 15.875		205 206 207 208	215 216 217 218	228 229 230 231	243 244 245 246	261 262 263 264	277 278 279 280	292 293 294 295	307 308
19.050 22.225 25.400 31.750		209 210	219 220 221 222	232 233 234 235	247 248 249 250	265 266 267 268	281 282 283 284	296 297 298 299	309 310 311 312
38.100 44.450 50.800 57.150	±0 -1.575		223	236 237 238	251 252 253 254	269 270 271 272	285 286 287 288	300 301 302 303	313 314 315 316
63.500 69.850 76.200 (C) 88.900	±0 -2.388				255 256 257	273 274 275	289 290 291 350	304 305 306	317 318 319

NOTE: All dimensions are in millimetres (mm), unless otherwise specified, and are based on an approximate conversion factor of 25.4mm equals one inch.

APPROVED 9 FEB 1954 REVISED (C) For changes see sheets 1, 2, 3 and 4.

P A N:
Other Cust AS 39 (C)

TITLE
SCREW, MACHINE-DRILLED FILLISTER HEAD, SLOTTED, CORROSION RESISTING STEEL, PASSIVATED, UNF-2A

MILITARY STANDARD
MS35276

Source: http://quicksearch.dla.mil - Downloaded: 2020-10-23T17:13Z
Check the source to verify that this is the current version before use.

PROCUREMENT SPECIFICATION
FF-S-92

SUPERSEDES BCFX7.1, BCFX7.2, BCGX1.10, BCGX1.11, BCGX3 AND IN PART ANSOI, MS35361, MS35366, BCGX3.1, BCHX1 AND BCHX2.

SHEET 4 OF 4