
FED. SUP CLASS
4730

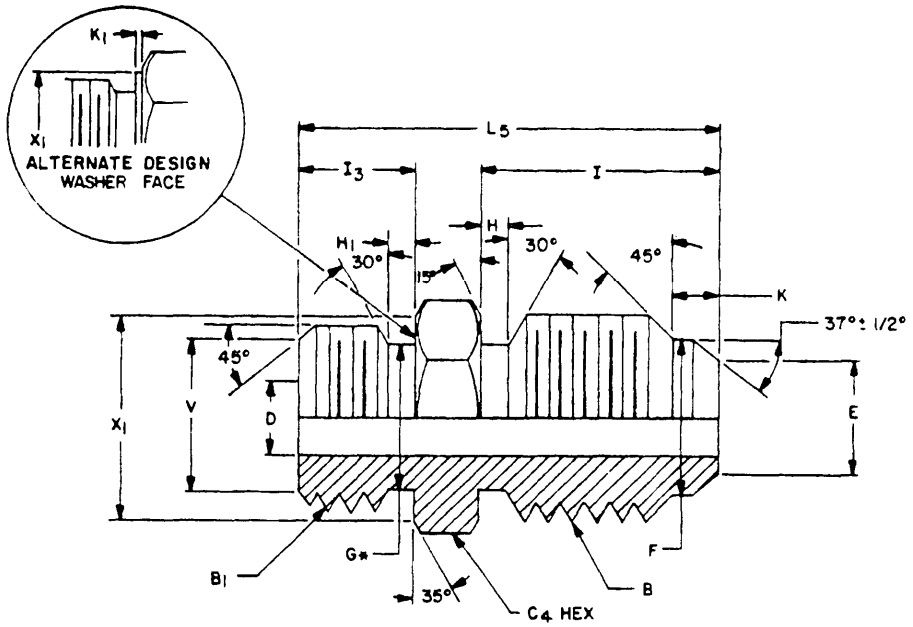

* "O" RING GROOVE UNDERCUT MUST BE SMOOTH AND FREE FROM TOOL MARKS 100 MICRO INCHES MAXIMUM.

NOTES:

1. MATERIAL SHALL BE CARBON STEEL WITH PROTECTIVE PLATING IN ACCORDANCE WITH MIL-F-18866.
2. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.
3. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES (MILLIMETERS).
4. PART NUMBER EXAMPLE:

   MS39324 – 5 – 4; – 5 INDICATE 37° FLARE FOR 5/16 O.D. TUBE IN 1/16 – INCH INCREMENTS, – 4 INDICATES "O" RING BOSS WITH 7/16-20 STRAIGHT THREAD.
5. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL.
6. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
7. DIMENSIONS AND TOLERANCES NOT SHOWN SHALL CONFORM TO SAE J514.

ENTIRE STANDARD REVISED

REVIEW ACTIVITIES: CS; AR
USER ACTIVITIES: AT

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT

APPROVED 4 MAY 1967 REVISED (A) 9 MAY 80

P.A. ME Other Cust	TITLE ADAPTER: 37-DEGREE FLARE TO "O" RING BOSS	MILITARY STANDARD MS39324 (ME)
PROCUREMENT SPECIFICATIONS MIL-F-18866	SUPERSEDES:	SHEET 1 OF 3

DD FORM 1 SEP 57 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 4730-A062

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

ADAPTER: 37 DEGREE FLARE TO "O" RING BOSS INCHES AND MILLIMETERS

DASH NO.	B STRAIGHT THREAD	B_1 STRAIGHT THREAD	D		C_4	I		G		H_1		L_5		I_3	
	NOM SIZE	NOM SIZE	IN	MM	HEX	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
	ISO R725 CLASS A	ISO R725 CLASS A	±.003	± .08	NOM	±.015	± .40	+.002 -.003	+ .05 - .08	+.015 -.000	+.40 -.00	±.02	± .50	±.005	± .13
-4-4	7/16 – 20	7/16 – 20	.172	4.40	9/16	.550	14.00	.364	9.25	.075	1.90	1.23	31.20	.360	9.14
-5-4	1/2 – 20	7/16 – 20	.172	4.40	9/16	.550	14.00	.364	9.25	.075	1.90	1.23	31.20	.360	9.14
-6-4	9/16 – 18	7/16 – 20	.172	4.40	5/8	.556	14.10	.364	9.25	.075	1.90	1.23	31.20	.360	9.14
-8-4	3/4 – 16	7/16 – 20	.172	4.40	13/16	.657	16.70	.364	9.25	.075	1.90	1.34	34.00	.360	9.14
-10-4	7/8 – 14	7/16 – 20	.172	4.40	15/16	.758	19.30	.364	9.25	.075	1.90	1.47	37.30	.360	9.14
-12-4	1-1/16 – 12	7/16 – 20	.172	4.40	1-1/8	.864	21.90	.364	9.25	.075	1.90	1.64	41.60	.360	9.14
-5-5	1/2 – 20	1/2 – 20	.234	5.90	5/8	.550	14.00	.427	10.85	.075	1.90	1.23	31.20	.360	9.14
-6-5	9/16 – 18	1/2 – 20	.234	5.90	5/8	.556	14.10	.427	10.85	.075	1.90	1.23	31.20	.360	9.14
-8-5	3/4 – 16	1/2 – 20	.234	5.90	13/16	.657	16.70	.427	10.85	.075	1.90	1.34	34.00	.360	9.14
-10-5	7/8 – 14	1/2 – 20	.234	5.90	15/16	.758	19.30	.427	10.85	.075	1.90	1.47	37.30	.360	9.14
-12-5	1-1/16 – 12	1/2 – 20	.234	5.90	1-1/8	.864	21.90	.427	10.85	.075	1.90	1.64	41.60	.360	9.14
-6-6	9/16 – 18	9/16 – 18	.297	7.50	11/16	.556	14.10	.482	12.24	.083	2.10	1.29	32.80	.391	9.93
-8-6	3/4 – 16	9/16 – 18	.297	7.50	13/16	.657	16.70	.482	12.24	.083	2.10	1.40	35.60	.391	9.93
-10-6	7/8 – 14	9/16 – 18	.297	7.50	15/16	.758	19.30	.482	12.24	.083	2.10	1.50	38.00	.391	9.93
-12-6	1-1/16 – 12	9/16 – 18	.297	7.50	1-1/8	.864	21.90	.482	12.24	.083	2.10	1.67	42.40	.391	9.93
-8-8	3/4 – 16	3/4 – 16	.391	9.90	7/8	.657	16.70	.660	16.76	.094	2.40	1.48	37.60	.438	11.13
-10-8	7/8 – 14	3/4 – 16	.391	9.90	1-1/8	.758	19.30	.660	16.76	.094	2.40	1.58	40.10	.438	11.13
-12-8	1-1/16 – 12	3/4 – 16	.391	9.90	1-1/4	.864	21.90	.660	16.76	.094	2.40	1.72	44.00	.438	11.13
-10-10	7/8 – 14	7/8 – 14	.484	12.30	1	.758	19.30	.773	19.63	.107	2.70	1.70	43.20	.500	12.70
-12-10	1-1/16 – 12	7/8 – 14	.484	12.30	1-1/8	.864	21.90	.773	19.63	.107	2.70	1.80	45.70	.500	12.70
-12-12	1-1/16 – 12	1-1/16 – 12	.609	15.50	1-1/4	.864	21.90	.945	24.00	.125	3.20	1.97	50.00	.594	15.10
-12-16	1-1/16 – 12	1-5/16 – 12	.609	15.50	1-1/2	.864	21.90	1.195	30.35	.125	3.20	2.00	50.80	.594	15.10

APPROVED 4 MAY 1967 REVISED (A) 9 MAY 80

P.A. Other Cust	TITLE ADAPTER: 37- DEGREE FLARE TO "O" RING BOSS	MILITARY STANDARD MS39324(ME)
PROCUREMENT SPECIFICATIONS MIL-F-18866	SUPERSEDES:	SHEET 2 OF 3

DD FORM 1 SEP 57 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.

REVIEW ACTIVITIES: CS

USER ACTIVITIES:

FED. SUP CLASS
4730

ADAPTER: 37 DEGREE FLARE TO "O" RING BOSS INCHES AND MILLIMETERS (CONT)

DASH NO	V		X_1		E		F		K		H		K_1	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
	±.005	± .13	±.005	± .13	±.003	± .08	±.005	± .13	+.015 -.000	+.4 0 -.0 0	+.015 -.000	+.4 0 -.0 0	+.015 -.000	+.4 0 -.0 0
-4-4	.365	9.27	.563	14.30	.193	4.90	.359	9.12	.193	4.90	.075	1.90		
-5-4	.365	9.27	.563	14.30	.255	6.48	.421	10.69	.193	4.90	.075	1.90		
-6-4	.365	9.27	.563	14.30	.318	8.08	.476	12.09	.198	5.00	.083	2.10	.062	1.60
-8-4	.365	9.27	.563	14.30	.426	10.82	.654	16.61	.253	6.42	.094	2.40	.062	1.60
-10-4	.365	9.27	.563	14.30	.539	13.70	.767	19.48	.266	6.80	.107	2.70	.062	1.60
-12-4	.365	9.27	.563	14.30	.664	16.80	.938	23.82	.315	8.00	.125	3.20	.062	1.60
-5-5	.425	10.80	.625	15.88	.255	6.48	.421	10.67	.193	4.90	.075	1.90		
-6-5	.425	10.80	.625	15.88	.318	8.08	.476	12.09	.198	4.90	.083	2.10		
-8-5	.425	10.80	.625	15.88	.426	10.82	.654	16.61	.253	6.42	.094	2.40	.062	1.60
10-5	.425	10.80	.625	15.88	.539	13.70	.767	1948	.266	6.80	.107	2.70	.062	1.60
-12-5	.425	10.80	.625	1588	.664	16.80	.938	2382	.315	8.00	.125	3.20	.062	1.60
-6-6	.480	12.19	.688	1748	.318	8.08	.476	12.09	.198	5.03	.083	2.10		
-8-6	.480	12.19	.688	1748	.426	10.82	.654	1661	.253	6.42	.094	2.40	.062	1.60
-10-6	.480	12.19	.688	1748	.539	13.70	.767	1948	.266	6.80	.107	2.70	.062	1.60
-12-6	.480	12.19	.688	1748	.664	16.80	.938	2332	.315	2.00	.125	3.20	.062	1.60
-8-8	.660	16.76	.875	22.22	.426	10.82	.654	16.61	.253	6.42	.094	2.40		
-10-8	.660	16.76	.875	22.22	.539	13.70	.767	1948	.266	6.80	.107	2.70	.094	2.40
-12-8	.660	16.76	.875	22.22	.664	1680	.938	2382	.315	800	.125	3.20	.094	2.40
-10-10	.775	19.68	1000	25.40	.539	13.70	.767	1948	.266	6.80	.107	2.70		
-12-10	.775	19.68	1000	2540	.664	1680	.938	2382	.315	800	.125	3.20		
-12-12	.945	24.00	1250	3175	.664	1680	.938	2382	.315	800	.125	3.20		
-12-16	1.195	30.35	1500	38.10	.664	1680	.938	2382	.315	800	.125	3.20		

APPROVED 4 MAY 1967 REVISED (A) 9 MAY 80

P.A.	TITLE	MILITARY STANDARD
Other Cust	ADAPTER: 37-DEGREE FLARE TO "O" RING BOSS	MS39324(ME)
PROCUREMENT SPECIFICATIONS: MIL-F-18866	SUPERSEDES:	SHEET 3 OF 3

DD FORM 1 SEP 67 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.