FED. SUP CLASS
4820

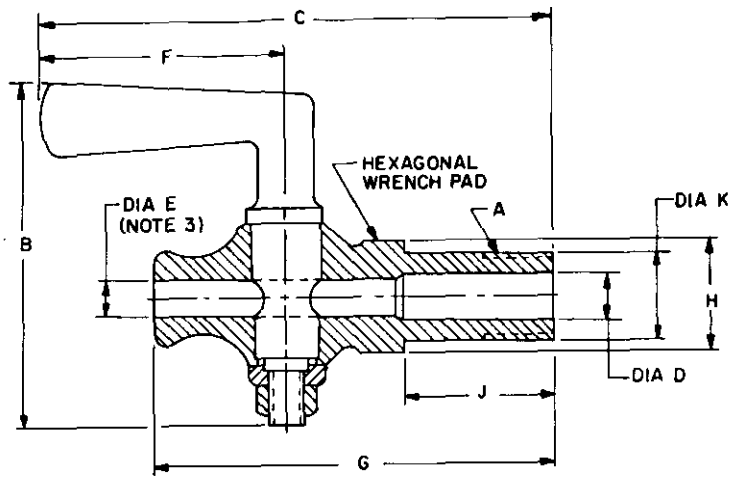

REVIEWER: AT; AV, CS, ME, MU
USER: EL, GL, MC, MI

DASH NO	A PIPE THREAD NPTF	B MAX	C MAX	D DIA MIN	E DIA MIN	F MAX	G MAX	H ACROSS FLATS ±.015	J ±.031	K DIA ±.015
1	1/4-18	2.00	3.56	.19	.19	1.69	2.75	.62 or .56	1.00	.56
2	3/8-18	2.50	4.56	.31	.25	2.12	3.50	.88 or .81	1.38	.69
3	1/2-14	2.66	5.50	.44	.31	2.50	4.12	1.00 or .94	1.81	.84

MATERIAL: Brass, Spec. QQ-L-225, Composition 2, or QQ-B-626, Composition 1 or 22.

PROTECTIVE COATING: Uncoated.

DIMENSIONS: Unless otherwise specified all dimensions are in inches.

THREADS: Threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H28.

PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35786-1.

NOTES: (1) For design feature purposes, this standard takes precedence over procurement documents referenced herein.

(2) Reference documents shall be of the issue in effect on date of invitations for bid.

(3) Oval port having same cross sectional area is acceptable.

(4) Illustrations are for identification purposes only and are not intended to restrict design or shapes of drain cocks which otherwise conform to requirements.

Ⓑ CANCELLED AFTER 30 MAR 73, USE MS35785.

APPROVED 19 JULY 1956 REVISED Ⓐ 23 MARCH 1966 Ⓑ 30 MAR 73

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC	TITLE	MILITARY STANDARD
Other Cust SH 69	COCKS, DRAIN, GROUND KEY, LONG SHANK, 125 PSI STEAM PRESSURE	MS35786
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:28Z
Check the source to verify that this is the current version before use.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1973-714-544/4774