FED. SUP. CLASS
2805

REVIEW ACTIVITY : DESC, 69
USER ACTIVITY : YD.

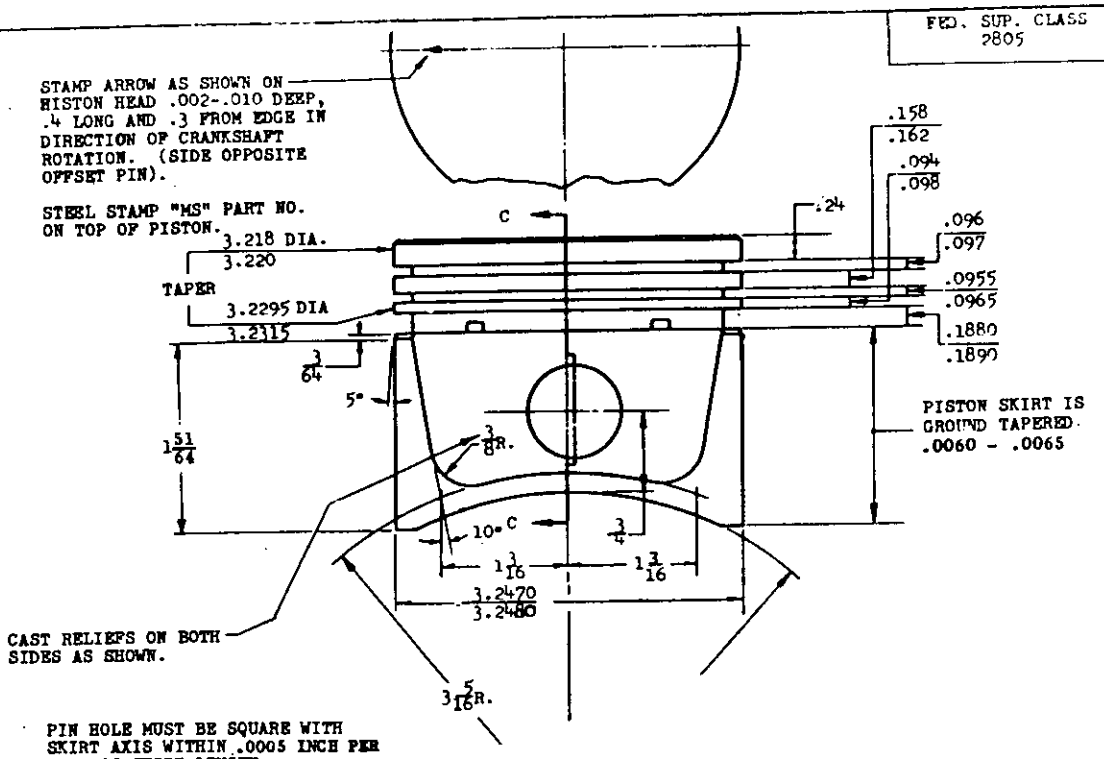

PIN HOLE MUST BE SQUARE WITH SKIRT AXIS WITHIN .0005 INCH PER INCH OF SKIRT LENGTH.

FINISHED PIN BORE TO BE FREE OF TIN PLATING.

SERVICE PISTONS -

WITH PI

WITH P

JIGGING PERMISSA

PISTON PI. GROOVE TO

...ERS.

Ⓑ CANCELED AFTER 24 JUNE 1982
NO SUPERSEDING STANDARD.

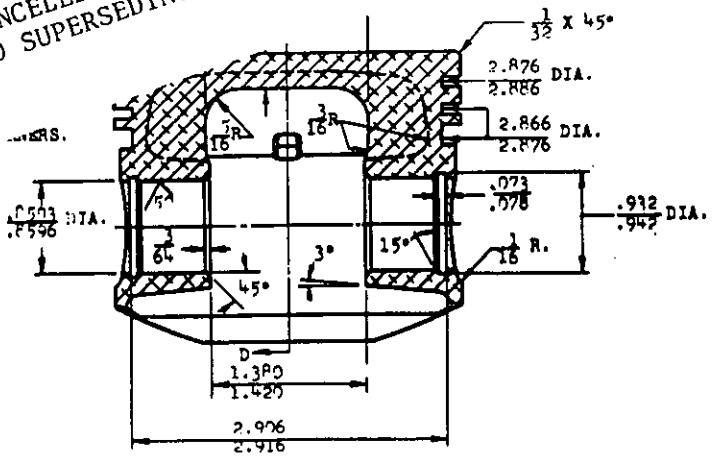

SECTION C-C

SIDES OF RING GROOVES MUST RUN TRUE WITH PISTON PIN BORE WITHIN .002 T.I.R.

PISTON PIN PART NO. MS 13996-2
PISTON PIN RETAINING RING PART NO. MS 13962-1

WEIGHT OF FINISHED PISTON, 273 ±3 GRAMS.

APPROVED 7 October 1959 REVISED Ⓐ 8 July 1966 Ⓑ 24 JUNE 1982

Ⓐ ENTIRE STANDARD REVISED

PART NO. MS35903-1

P.A. Army - MO(ERDL)
Other Cust
A.F. - 69
NAVY - YD

MILITARY STANDARD

PISTON, INTERNAL COMBUSTION ENGINE: 3-1/4 X 2-3/4

MS 35903

PROCUREMENT SPECIFICATION
MIL-E-11275

SUPERSEDES:

SHEET 1 OF 4

DD FORM 1 OCT 52 672-1

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.