NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
6640

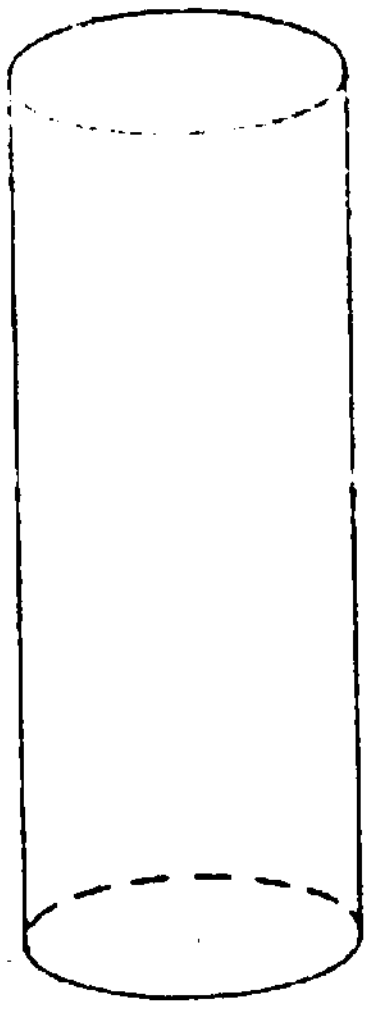

PART NUMBER	NOMINAL DIMENSIONS		WALL THICKNESS RANGE mm	MINIMUM BOTTOM THICKNESS mm
	OUTSIDE DIAMETER mm	LENGTH mm		
MS36185-1	17	55	1 to 1.25	0.75

MATERIAL: Borosilicate glass, Specification DD-G-541, Type I, Class A or soda-lime glass, Type II.

NOTES:

1. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
2. Referenced documents shall be of the issue in effect on date of invitations for bid.

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

APPROVED 30 DEC 1960 REVISED

F.A.	CmlC	TITLE TEST TUBE Kahn type	MILITARY STANDARD
Other Cust	BuMed DAY		MS36185
Procurement Specification DD-T-[illegible]		SUPERSEDES	SHEET 1 OF 1

DD FORM 1 SEP 57 672 (Coordinated) [illegible]

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:35Z
Check the source to verify that this is the current version before use.