USER ACTIVITIES:
REVIEWER ACTIVITIES:
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

FED. SUP CLASS
6640

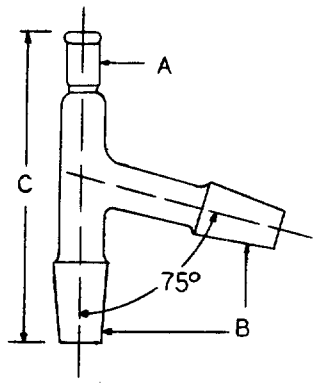

PART NUMBER	A FEMALE JOINT SIZE	B MALE JOINT SIZE	C TOTAL LENGTH approx mm
MS36257-1	10/30	24/40	160

(A) MATERIAL: Adapter shall be made of borosilicate glass in accordance with ASTM E 438, Type I, Class A.

(A) DESIGN: Adapter shall have standard taper joints with male joints at a 75° inner angle. The female joint shall be a standard taper 10/30 thermometer opening.

TOLERANCE: Female joint tolerance shall be -0.15 mm and male joint tolerance shall be +0.15 mm at gaging point.

(A) NOTES:

1. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
2. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
3. FSCMs: 07736, 14674, 18575, and 22527.

APPROVED 15 DEC 1961 REVISED (A) 10 APR 1987

P. A. / Other Cust	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
EA / MS, MB 99		ADAPTER, LABORATORY GLASSWARE three-way	MS36257
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NUMBER 6640-1417-3

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T17:37Z
Check the source to verify that this is the current version before use.