FED SUP CLASS
6640

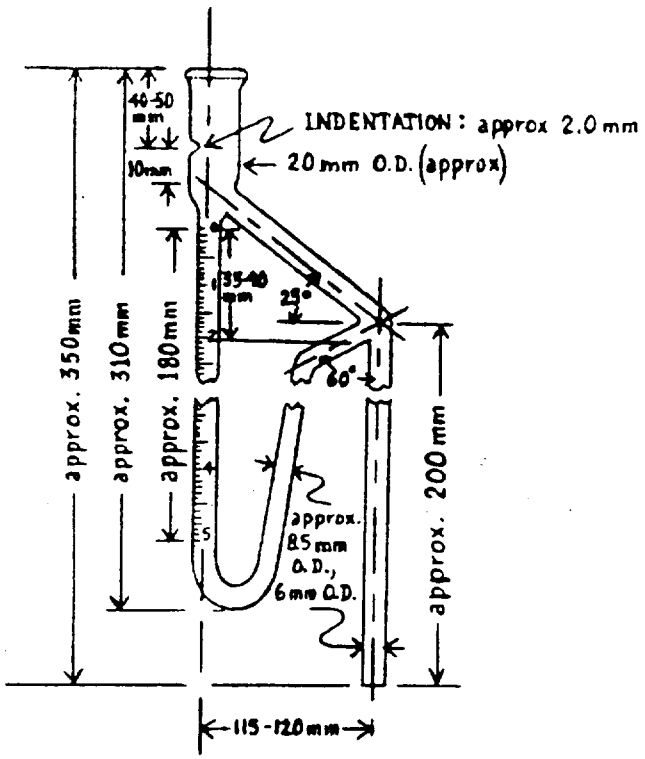

PART NUMBER	Capacity ml	Graduation Interval ml	Numbering Interval ml	Capacity Tolerance ml
MS36266-1	5	0.1	1, 0 to 5	±0.05

MATERIAL: Borosilicate glass, Federal Specification DD-G-541, Type I, Class A.

Ⓐ DESIGN:
1. Mouth size: Number 3 rubber stopper.
2. Measuring tube shall contain a drop intercept indentation.

Ⓐ NOTES:
1. Distilling trap shall be suitable for use, as outlined under ASTM D-322, to determine the amount of dilution in crankcase oil of engines when gasoline has been used as the fuel.
2. Referenced documents shall be of the issue in effect on date of invitations for bid.

Ⓐ

Ⓐ Approved 15 Dec 1961 Revised 10 May 1974

P.A. EA Other Cust. MS 82	TITLE DISTILLING TRAP, CRANKCASE DILUTION	MILITARY STANDARD MS36266
PROCUREMENT SPECIFICATION None	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1

☆ U.S. GOVERNMENT PRINTING OFFICE 1974—713-155/6228

This military standard is approved by the Depa nt of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:37Z
Check the source to verify that this is the current version before use.