REVIEW ACTIVITIES: ARMY - MD, ME
NAVY - AS, OS, YD
AIR FORCE - 03

FED. SUP CLASS
6940

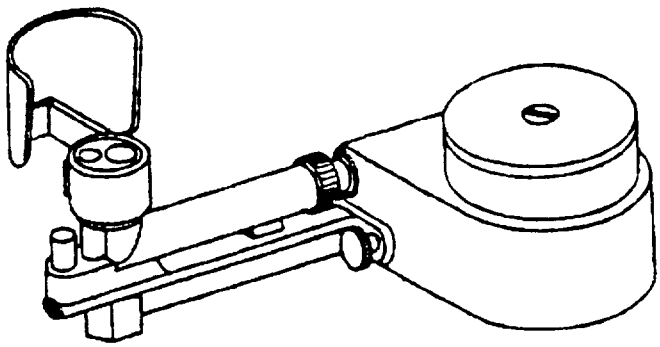

PART NUMBER	DIMENSIONAL DATA in. (mm)				
	OVERALL HEIGHT	OVERALL LENGTH	OVERALL WIDTH	HEIGHT OF SHIELD	LENGTH OF SHIELD
MS36277-1	3-1/4 (82.5)	7-1/2 (190.5)	3-1/2 (88.9)	1-3/4 (44.4)	3 (76.2)

MATERIAL: The base housing, valve actuating housing, "on-off" platform, and detachable burner shall be die-cast zinc alloy in accordance with Federal Specification QQ Z-363. The draft guard shall be steel, nickel plated.

DESIGN: Burner shall have an adjustable pilot light for automatic ignition. The main flame shall be normally off and ignites only when the spring valve mechanism is actuated by pressure on the valve platform. A continuous flame shall be obtained by depressing and slightly rotating the platform in either direction.

NOTE: 1. Referenced documents shall be of the issue in effect on date of invitations for bid.

Ⓐ ENTIRE STANDARD REVISED

APPROVED 22 June 1962 REVISED Ⓐ 30 November 1979

This standard has been approved by the Department of the Defense, and is mandatory for use by the Department of the Air Force activities. All other military activities are required to employ this standard when suitable.

P.A.	EA	TITLE	MILITARY STANDARD
Other Cust	MS 99	BURNER, GAS, LABORATORY touch operated	MS36277
Procurement Specification MIL-B-36274		SUPERSEDES:	SHEET 1 OF

DD FORM 1 SEP 66 672 (Coordinated) EDITION OF 1 SEP 65 MAY BE USED. Project Number 6640-0726

DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:37Z
Check the source to verify that this is the current version before use.