FED. SUP CLASS
6630

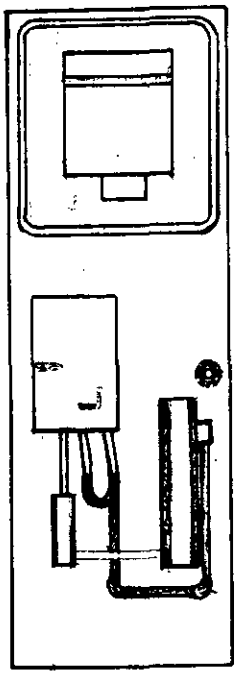

	PART NUMBER	O/A DIMENSIONS (mm) H	O/A DIMENSIONS (mm) W	OXYGEN RANGE	MAXIMUM SAMPLE FLOW	ELECTRICAL DATA s	ELECTRICAL DATA cycles
(A)	MS36527-1	1860	508	0-0.4 ppm			60

MATERIAL: Meter body and exhaust ventur[illegible] shall be of aluminum.

Meter tube and gener[illegible] in accordance with Federal [illegible]

DESIGN: Analyzer sha[illegible]. It shall be of the type whic[illegible] feed water with pure hydroo[illegible] to that of pure hydrogen by [illegible] analyzer shall be calibrated to

PURPO[illegible] of dissolved oxygen in boiler feed

NOTES: [illegible]nis Military Standard by minor variations in [illegible]s are considered standard under this document, [illegible]riations do not affect performance and are not in the material requirements as specified herein.

2. [illegible]ed documents shall be of the issue in effect on date of [illegible]ations for bid.

CANCELLED AFTER 11 JAN 1984 NO SUPERSEDING STANDARD

(B) Cancellation
Redrawn as of 17 August 1982

APPROVED 29 JUN 1967 REVISED (A) 9 DEC 1971 (B) 11 JAN 1984

P.A.	EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	YD 99		ANALYZER, RECORDER, DISSOLVED OXYGEN	MS36527
Procurement Specifications: NONE		SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Cancellation
DATE

Proj. 6630-0190-12

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:42Z
Check the source to verify that this is the current version before use.