MILITARY SPECIFICATION

CABLE ASSEMBLY, AIRCRAFT AUTONAVIGATOR ALIGNMENT, UMBILICAL

1. SCOPE

1.1 This specification covers environment resisting, bayonet type, aircraft autonavigator alignment umbilical cable assembly with removable crimp contacts and accessories.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-393 - Plastic Molding Material, Polycarbonate, Injection and Extrusion.

MILITARY

MIL-S-901 - Shock Tests, H.I. (High-Impact); Shipboard Machinery, Equipment and Systems, Requirements for.
MIL-H-5606 - Hydraulic Fluid, Petroleum Base, Aircraft, Missile and Ordnance.
MIL-T-5624 - Turbine Fuel, Aviation, Grades JP-4 and JP-5.
MIL-R-6855 - Rubber, Synthetic; Sheets, Strips, Molded or Extruded Shapes.
MIL-S-7742 - Screw Threads, Standard, Optimum Selected Series: General Specification for.
MIL-L-7808 - Lubricating Oil, Aircraft Turbine Engine, Synthetic Base.
MIL-S-8516 - Sealing Compound, Polysulfide Rubber, Electric Connectors and Electric Systems, Chemically Cured.
MIL-E-17555 - Electronic and Electrical Equipment, Accessories, and Repair Parts; Packaging and Packing of.
MIL-M-20693 - Molding Plastic, Polyamide (Nylon) Rigid.
MIL-C-23216 - Contacts, Electric Connector, General Specification For.
MIL-C-24145/22 - Cable, Electrical, Special Purpose, for Shipboard Use, Type 3SF.
MIL-C-26482 - Connector, Electric, Circular, Miniature, Quick Disconnect, Environment Resisting.
MIL-I-45208 - Inspection System Requirements.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-202 - Test Methods for Electronic and Electric Component Parts.
MIL-STD-889 - Dissimilar Metals.
MS3110 - Connectors, Receptacle, Electric, Solder Type, Wall Mounting, Flange, No. 4 Holes, Bayonet Coupling.
MS3112 - Connectors, Receptacle, Electric, Solder Types, Box Mounting, Flange, No. 4 Holes, Bayonet Coupling.
MS3116 - Connectors, Plug, Electric, Solder Type, Straight Bayonet Coupling.
MS3192 - Contacts, Pin, Electric, Crimp, Removable .
MS3193 - Contacts, Socket, Electric, Crimp, Removable.
MS17339 - Cable, Safety, (Wire Rope).
MS24256 - Tool, Contact, Connector, Assembly and Disassembly.
MS33715 - Insert Arrangements, Electric Connector, Shell Size 22.

DRAWING

MILITARY

9000-S6202 -73226 - Typical Ball Impact Equipment.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Sample for first article inspection. Prior to production, a sample(s) shall be tested as specified in 4.3 (see 6.4).

3.2 Materials. The materials used to fabricate the cable assembly shall be resistive to environmental contaminants found on aircraft carrier flight decks: namely, jet fuel, salt water, high humidity, transmission fluid, hydraulic fluid and lubricating oil. Materials shall be adequate for the purpose intended, and as specified hereinafter.

3.2.1 Dissimilar metals. When dissimilar metals, as defined in MIL-STD-889, are employed in intimate contact with each other, protection against electrolytic corrosion shall be provided.

3.2.2 Dielectric materials. Insert and grommet materials shall be high grade dielectric having hardness and electrical and mechanical characteristics adequate for the purpose intended.

3.2.3 Shells. Plug shell, back shell, and bayonet coupling nut shall be black polycarbonate in accordance with L-P-393.

3.2.4 Spring washer. Spring washer shall be corrosion-resistant, and shall be of a tempered steel or beryllium copper adequate for the purpose intended.

3.2.5 Ferrule and gland ring. Material for ferrule and gland ring shall be polyamide (nylon) in accordance with type II of MIL-M-20693 or polycarbonate conforming to L-P-393.

3.2.6 Neoprene parts. "O" ring, cable grommet, and cap gasket shall be neoprene in accordance with class 2 of MIL-R-6855, and shall be of 40 ±5 durometer hardness.

3.2.7 Gland nut and clamp assembly. Gland nut and clamp assembly shall be of a corrosion-resistant material such as nickel copper or steel adequate for the purpose intended.

3.2.8 Cap assembly. Cap assembly shall be corrosion-resistant steel or polycarbonate plastic, in accordance with L-P-393.

3.2.9 Bayonet pins. Bayonet pins shall be of corrosion-resisting steel.

3.3 Design and construction. Cable assemblies and protective caps shall be designed and constructed to withstand normal handling incident to installation and maintenance in service and the tests specified herein. The cable assembly shall be constructed as shown on figure 1.

3.3.1 Contact design. Contacts (pin and socket) shall be crimp type conforming to MS3192 and MS3193.

3.3.2 Insert design and construction. Inserts shall be of voidless construction, and shall be secured to prevent rotation within the shell. Insert and wire-sealing grommet shall be one integral part. The design shall permit the removal and reinsertion of individual contacts without damage to the sealing members, using the applicable tools specified in MS24256. The individual contacts shall be positively retained when installed in the inserts.

3.3.2.1 Insert arrangement. The insert arrangement shall be as specified herein, and shall be interchangeable with insert arrangement 21 shown on MS33715.

3.3.2.2 Contact alignment. Inserts for socket contacts shall provide an overall side-play of 0.0025 to 0.0075 inch from the required position to facilitate alignment of mating pin contacts.

3.3.3 Coupling and plug shell. Coupling shall be as shown on figure 1, and shall mate with counterpart receptacles MS3112E-22-21P, and in flush-mounted receptacles MS3112E-22-21S, or pigtail type receptacles MS3110E-22-21S, (cupronickel version). In addition, the umbilical cable shall mate with Relative Velocity Computer (RVC) receptacle, MS3110E-22-21S, (cupronickel version). Plug shell shall be as shown on figure 1.

3.3.3.1 Shell size. Shell size shall be as shown on figure 1, and shall conform generally with MS3116E-22-21P and MS3116E-22-21S for external configuration.

3.3.4 Shell design. Plug shells shall be seamless, and shall retain their inserts in a positive manner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.

3.3.4.1 Screw threads. Screw threads shall conform to MIL-S-7742. Slight out-of-roundness beyond the specification tolerance is acceptable if threads can be checked without forcing the thread gages.

3.3.5 Coupling connections. Connectors shall be coupled to counterpart connectors by means of the bayonet coupling nut. Coupling shall be accomplished by clockwise rotation of the coupling nut; uncoupling by counterwise rotation. The bayonet coupling nut shall be knurled to provide a gripping surface.

3.3.6 Engagement of connectors. Connectors and accessories shall be capable of being fully engaged and disengaged without the use of tools. Engagement of connectors shall be defined as full insertion of pins into sockets and proper sealing of the mating insert faces. Full engagement shall be indicated by an audible sound at the completion of the coupling cycle, and a positive detent shall be included in the coupling mechanism to lock connectors in the engaged position.

3.3.6.1 Shell polarization. Polarization of connectors shall be accomplished by matched integral keyways of counterpart connectors. The polarization of counterpart connectors shall take place before coupling nuts are engaged, and before any pin contacts can touch the opposing insert face or sockets of the counterpart connector.

3.3.6.2 Engagement seal. Connectors shall contain sealing means so that engaged connectors comply with the requirements specified herein. The design of the seal shall be such that in mated connectors all air paths between adjacent contacts and between contacts and shells are eliminated. There shall be interfacial mating of the engaged connector insert to provide dielectric under compression of 0.005 inch minimum.

3.3.7 Wire sealing. Integral resilient grommet and insert shall be capable of sealing individual conductors of the cable specified herein.

3.3.7.1 Sealant. Potting compound in accordance with MIL-S-8516 shall be used to seal cable end and wires in the back shell.

3.3.8 Cable. Cable shall be type 3SF of MIL-C-24145/22.

3.3.8.1 Connector designations. Connector designations "P1" and "P2" shall be hot-stamp printed on cable within 3 inches of the cable clamp in 1/8-inch characters and shall be filled with white neoprene ink.

3.3.8.2 Cable markings. The cable sheath shall be marked in 1-foot increments and shall be numbered consecutively from 1 to 115 feet, starting from the pin end. The characters shall be 1/8 inch high, hot-stamp printed, and shall be filled with white neoprene ink.

3.3.8.3 Safety cable. Safety cable shall be in accordance with MS17339, and shall be secured to the cap assembly as indicated on figure 1. Length shall be 6 inches.

3.4 General construction. The general construction requirements shall be as specified in 3.4.1 through 3.4.9, and as shown on figure 1.

3.4.1 Dimensions. Dimensions shall be as shown on figure 1.

3.4.1.1 Tolerances. Except as otherwise shown on figure 1, tolerances shall be as follows:

(a) Fractional dimensions ±1/64 inch.
(b) Decimal dimensions ±0.005 inch.
(c) Angles ±1/2 degree.

3.4.2 All sharp corners and edges shall be rounded 0.005 to 0.010 inch maximum.

3.4.3 Drilled and tapped holes shall have all burrs removed.

3.4.4 Unless otherwise specified herein, machined surfaces shall be 63 root mean square (r.m.s.), maximum.

3.4.5 All machining of metal parts shall be accomplished before plating or other finish is applied.

3.4.6 Unless otherwise specified on figure 1, threads shall be American National Standard RH Cl 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.

3.4.7 Porosity. Molded parts shall be uniformly dense throughout the structure. In general they shall contain no holes, air or gas pockets, resin pockets, solvent areas, delamination, soft spots, area lacking resin, or uncured areas.

3.4.8 Contact identification. Conductor grommet, pin, and socket insert shall have contact identification marked on both faces. The markings may be stamped with characters at least 1/16 inch high.

3.4.9 Identification of product. The manufacturer's name or symbol, part number, and specification number shall appear on the outside diameter of the coupling nut. Markings shall be 1/8-inch high characters not less than 0.003 inch deep.

3.5 Performance. Cable assembly shall perform as specified hereinafter when subjected to the conditions and tests specified in 4.5 and 4.6.

3.5.1 Connectors shall conform to requirements of MIL-C-26482.

3.5.2 Durability. The cable assembly shall withstand the durability test specified in 4.6.5. Connectors shall show no mechanical or electrical defects detrimental to the operation of the connector after 1000 cycles of coupling and uncoupling.

3.5.3 Vibration. Mated connectors shall not be damaged and there shall be no loosening of parts, when tested as specified in 4.6.6. Counterpart receptacles shall be retained in full engagement, and there shall be no interruption of electrical continuity longer than 10 milliseconds.

3.5.4 Mechanical abuse. The cable assembly shall withstand the abuse test specified in 4.6.7 without cracking, breaking, or deformation. The connector shall be serviceable and shall be capable of performing its function at the completion of the test.

3.5.5 Ball impact. The conductor assembly shall withstand the test of 4.6.8 without cracking, breaking or deformation. The connector shall be serviceable, and shall be capable of performing its function at the completion of the test.

3.5.6 The cable assembly shall withstand the tests of 4.6.9, 4.6.10, 4.6.11, and 4.6.12 without deformation, excessive swelling, or softening of the molded polycarbonate parts or interference with the ability of the cable assembly to perform its intended function.

3.5.7 Shock. The cable assembly shall withstand the shock test of 4.6.13 without damage.

3.6 Workmanship. Cable assemblies shall meet all design dimensions and intermateability requirements of this specification. Loose contacts, poor molding fabrication, loose materials, defective bonding, and post molding warpage will be considered adequate basis for rejection of items of quality inferior for the purpose intended.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection system. The supplier shall provide and maintain an inspection system acceptable to the Government for supplies and services covered by this specification. The inspection system shall be in accordance with MIL-I-45208 (see 6.2 and 6.3).

4.2 Classification of inspection. The inspection of cable assemblies shall be classified as follows:

(a) First article inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

4.3 First article inspection. First article inspection shall consist of the examinations and tests performed in the sequence specified in table I on the test samples specified in 3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.

Table I - First article inspection.

Number	Title	Requirement	Test
1	Examination of product	---	4.4.2
2	Insulation resistance	3.5.1	4.6.3
3	Durability	3.5.2	4.6.5
4	Shock	3.5.7	4.6.13
5	Vibration	3.5.3	4.6.6
6	Mechanical abuse	3.5.4	4.6.7
7	Ball impact	3.5.5	4.6.8
8	High humidity	3.5.6	4.6.9
9	Salt spray	3.5.6	4.6.10
10	Aviation fuel	3.5.6	4.6.11
11	Resistance to transmission and hydraulic fluids and lubricating oil	3.5.6	4.6.12
12	Operating forces	3.5.6	4.6.1
13	Contact resistance	3.5.1	4.6.2
14	Dielectric withstanding voltage	3.5.1	4.6.4

4.4 Quality conformance inspection.

4.4.1 Sampling. Cable assemblies shall be selected in accordance with MIL-STD-105 at inspection level II for examination and tests specified in 4.4.2 and 4.4.3. The acceptable quality level (AQL) shall be 0.25 percent for major defects and 1.0 percent for minor defects. Any cable assembly containing one or more defects shall not be offered for delivery, and if the number of defective units in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall not be offered for acceptance.

4.4.1.1 Major defects. Major defects shall be those that interfere with mating interchangeability of connectors and their functioning.

4.4.1.2 Minor defects. Minor defects shall be those that are objectionable but that do not render the connector useless.

4.4.2 Examination of product. The cable assembly shall be subjected to a thorough examination to determine that materials, design, construction, and workmanship are in accordance with the requirements of this specification.

4.4.3 Quality conformance tests. The samples selected in accordance with 4.4.1 shall be subjected to the operating forces, contact resistance, insulation resistance, dielectric withstanding voltage and mechanical abuse tests (see 4.6.1, 4.6.2, 4.6.3, 4.6.4, and 4.6.7).

4.5 Inspection conditions. Unless otherwise specified (see 6.2) examinations and tests required by this specification shall be conducted under any combinations of conditions within the ranges specified hereinafter. Any specified condition shall not affect the other two ambient ranges.

(a) Temperature 25°C. +3°C.
(b) Relative humidity 30 to 60 percent.
(c) Barometric pressure 27 to 31 inches of mercury.

4.6 Test methods.

4.6.1 Operating forces. Connectors shall be engaged and disengaged from counterpart receptacles; the forces or torques which must be applied to the coupling rings in order to facilitate full coupling and uncoupling shall be measured.

4.6.2 Contact resistance. The contact resistance shall be measured in accordance with the contact resistance test of MIL-C-23216.

4.6.3 Insulation resistance. Connectors shall be tested in accordance with method 302, test condition B of MIL-STD-202. The resistance shall be measured between all contacts.

4.6.4 Dielectric withstanding voltage. Connectors shall be tested in accordance with method 301 of MIL-STD-202. The test voltage shall be 1500 volts (ac, r.m.s.) applied between all adjacent contacts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.

4.6.5 Durability. Connectors shall be mated and unmated with counterpart receptacles 1000 times at a rate of 50 + 25 cycles per hour with the coupling nut operated in a manner to simulate actual service.

4.6.6 Vibration. Mated connectors shall be vibrated in accordance with test condition A, method 204 of MIL-STD-202 to determine conformance with 3.5.3. Contacts shall be wired in series and connected to a testing circuit. Any voltage or current within the connector rating shall be applied throughout the vibration test.

4.6.7 Mechanical abuse. The mechanical abuse test shall consist of a drop of 5 feet through a radius of 6 feet. The connector shall strike against a vertical steel plate (1/4 inch thick) for a total of ten impacts. The pivot point shall be flexible so as not to restrain the impact.

4.6.8 Ball impact. The ball impact test shall be conducted with a hardened steel ball dropped on the lip of the assembled connector. The point of impact shall be near the end of the bayonet coupling nut in the area of the locking grooves. The platen on which the assembled connector is placed for this test shall be of wood. A typical ball impact device is shown on Drawing 9000-S6202-73226. The height of the drop (feet) and the weight of the ball (pounds) shall be in the sequence specified in table II.

Table II - Ball impact.

Ball weight (pounds)	Height (feet)
3	1
3	2
3	3
3	4
3	5
3	6
5	4
5	5
5	6

4.6.9 High humidity. Humidity test shall be conducted in accordance with test condition A, method 101 of MIL-STD-202.

4.6.10 Salt spray. Salt spray test shall be conducted in accordance with test condition A, method 101 of MIL-STD-202. The salt solution shall be 5 percent.

4.6.11 Aviation fuel. Molded parts shall be immersed in aviation fuel JP4 and JP5 of MIL-T-5624 for 48 hours each at room temperature without deformation, softening, excessive swelling, or ability to perform intended function. After immersion, the gain in weight shall be not over 0.1 percent, and the gain in volume shall be not over 0.5 percent.

4.6.12 Resistance to transmission and hydraulic fluids and lubricating oil. The molded polycarbonate parts shall be immersed in transmission fluid, hydraulic fluid in accordance with MIL-H-5606, and lubricating oil in accordance with MIL-L-7808 for a period of 48 hours each to determine conformance with 3.5.6.

4.6.13 Shock. The cable assembly shall be subjected to the type B, grade A, shock test for lightweight equipment in accordance with MIL-S-901.

4.7 Inspection of preparation for delivery. The packaging, packing, and marking shall be inspected for compliance with section 5 of this document.

5. PREPARATION FOR DELIVERY

(The preparation for delivery requirements specified herein apply only for direct Government procurements. For the extent of applicability of the preparation for delivery requirements of referenced documents listed in section 2, see 6.5.)

5.1 Preservation and packaging, packing, and marking. Equipment shall be preserved and packaged level A or C; packed level A, B, or C as specified (see 6.2) and marked in accordance with MIL-E-17555 (see 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.

5.2 Use of polystyrene (loose-fill) material. Unless otherwise approved by the procuring activity (see 6.2), use of polystyrene (loose-fill) material for packaging or packing applications such as cushioning, filler and dunnage is prohibited. When approved, containers (interior and exterior) shall be marked or labelled as follows:

"CAUTION

Contents cushioned etc. with polystyrene (loose-fill) material.
Not to be taken onboard ship.
Remove and discard loose-fill material before shipboard storage.
If required, recushion with cellulosic material bound fiber,
fiberboard or transparent flexible cellular material."

6. NOTES

6.1 Intended use. The cable assembly described under this specification is used primarily on aircraft carriers in connection with electronic equipment for aircraft.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Quality assurance provisions (see 4.1.1).
(c) Test conditions if other than as specified (see 4.5).
(d) Level of preservation, packaging, packing and marking required (see 5.1).
(e) When polystyrene "loose-fill" material is approved (see 5.2).

6.3 Management control system document. The following management control system document should be included on DD form 1660:

(a) MIL-I-45208 (see 4.1.1).

6.4 First article inspection. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection as to those bidders offering a product which has been previously procured or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending procurement.

6.5 Sub-contracted material and parts. The preparation for delivery requirements of referenced documents listed in section 2 do not apply when material and parts are procured by the supplier for incorporation into the equipment and lose their separate identity when the equipment is shipped.

6.6 THE MARGINS OF THIS SPECIFICATION ARE MARKED "#" TO INDICATE WHERE CHANGES (ADDITIONS, MODIFICATIONS, CORRECTIONS, DELETIONS) FROM THE PREVIOUS ISSUE WERE MADE. THIS WAS DONE AS A CONVENIENCE ONLY AND THE GOVERNMENT ASSUMES NO LIABILITY WHATSOEVER FOR ANY INACCURACIES IN THESE NOTATIONS. BIDDERS AND CONTRACTORS ARE CAUTIONED TO EVALUATE THE REQUIREMENTS OF THIS DOCUMENT BASED ON THE ENTIRE CONTENT IRRESPECTIVE OF THE MARGINAL NOTATIONS AND RELATIONSHIP TO THE LAST PREVIOUS ISSUE.

Preparing activity:
Navy - SH
(Project 6150-N136)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.

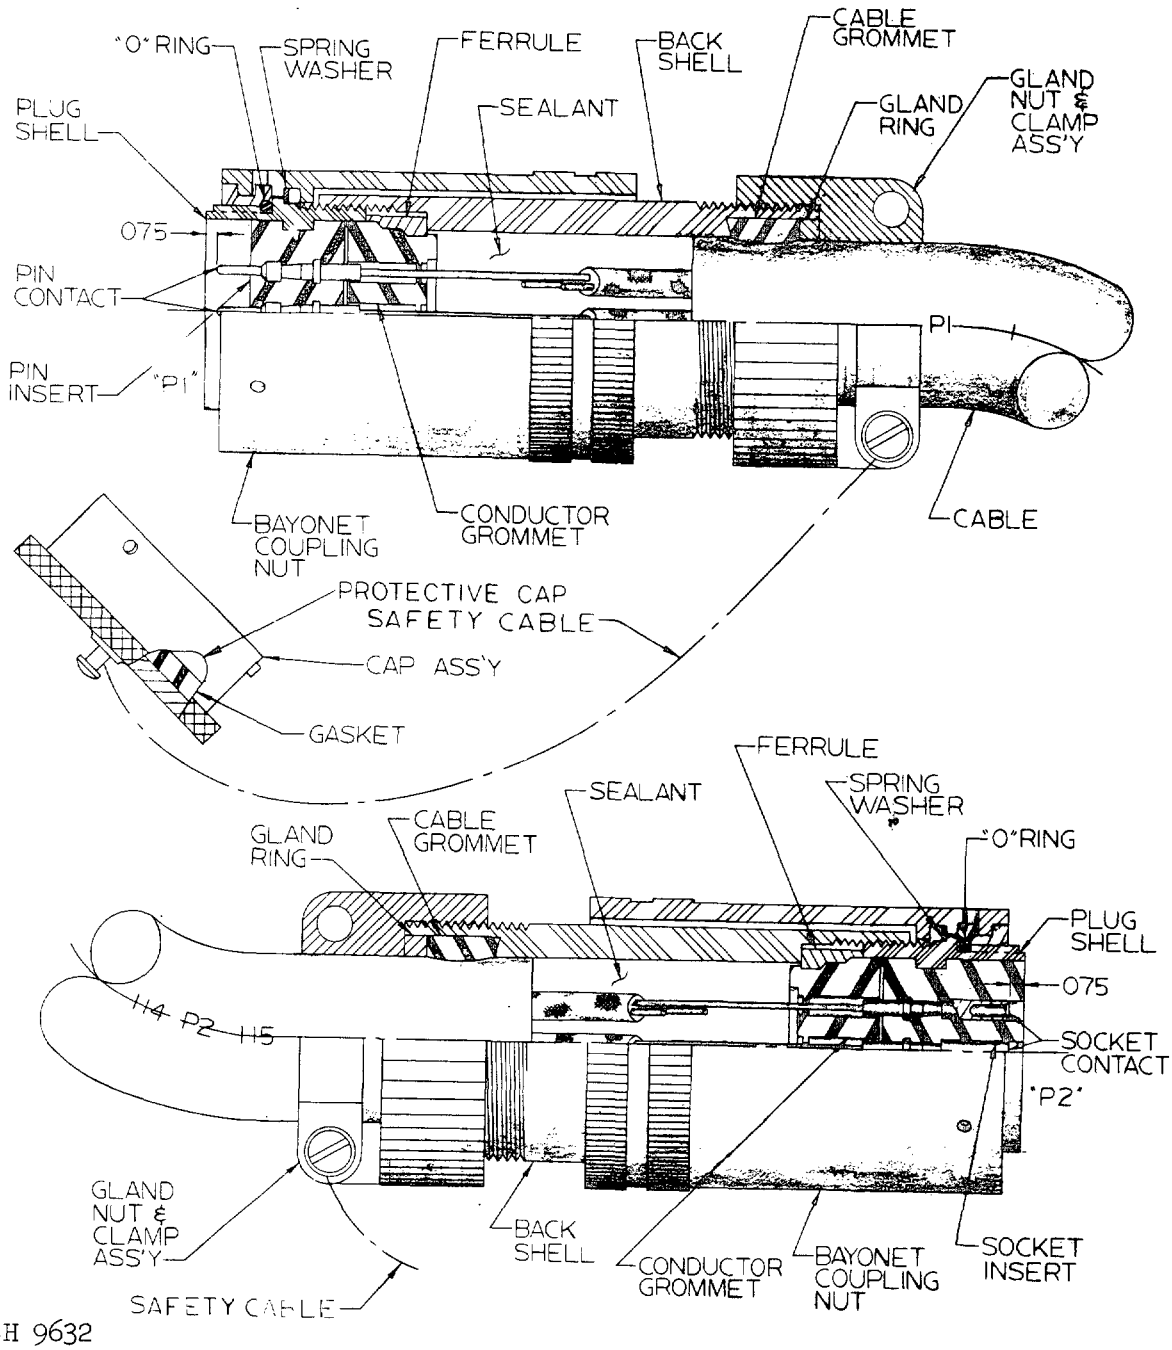


Figure 1 - Cable assembly, aircraft autonavigation alignment, unbilical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.

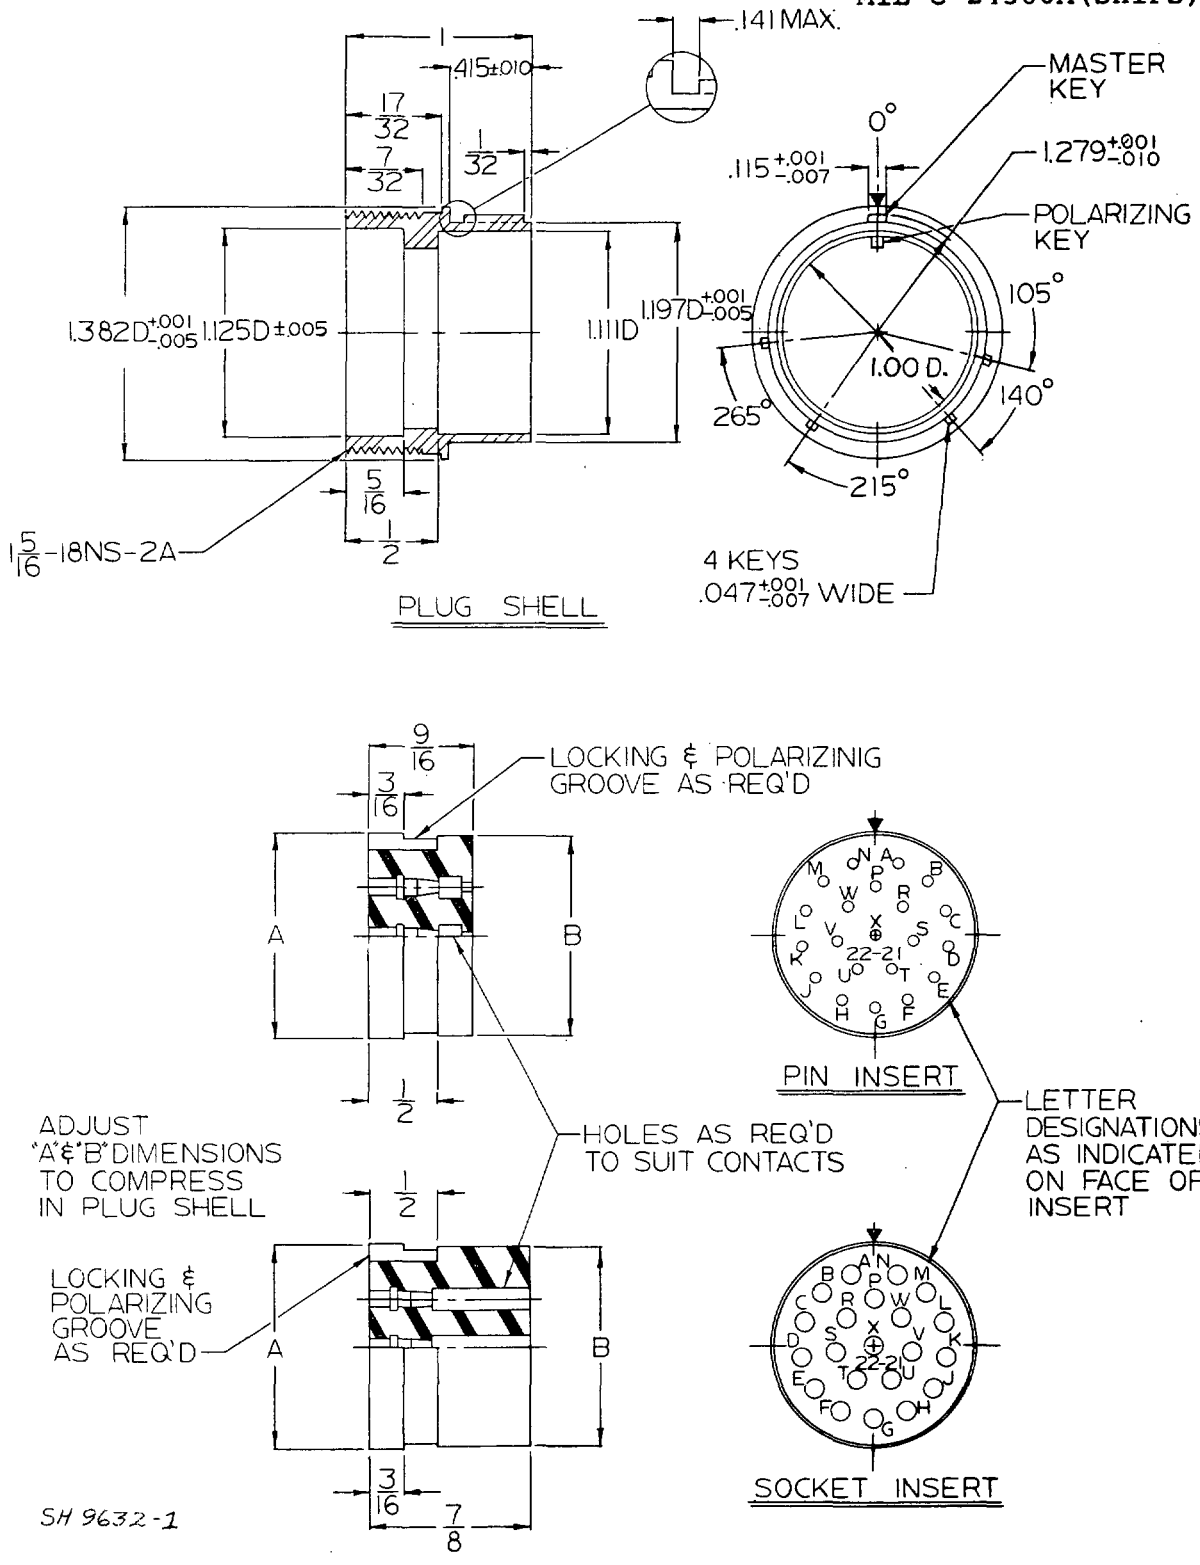


Figure 1 - Cable assembly, aircraft, autonavigator alignment, umbilical (continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.


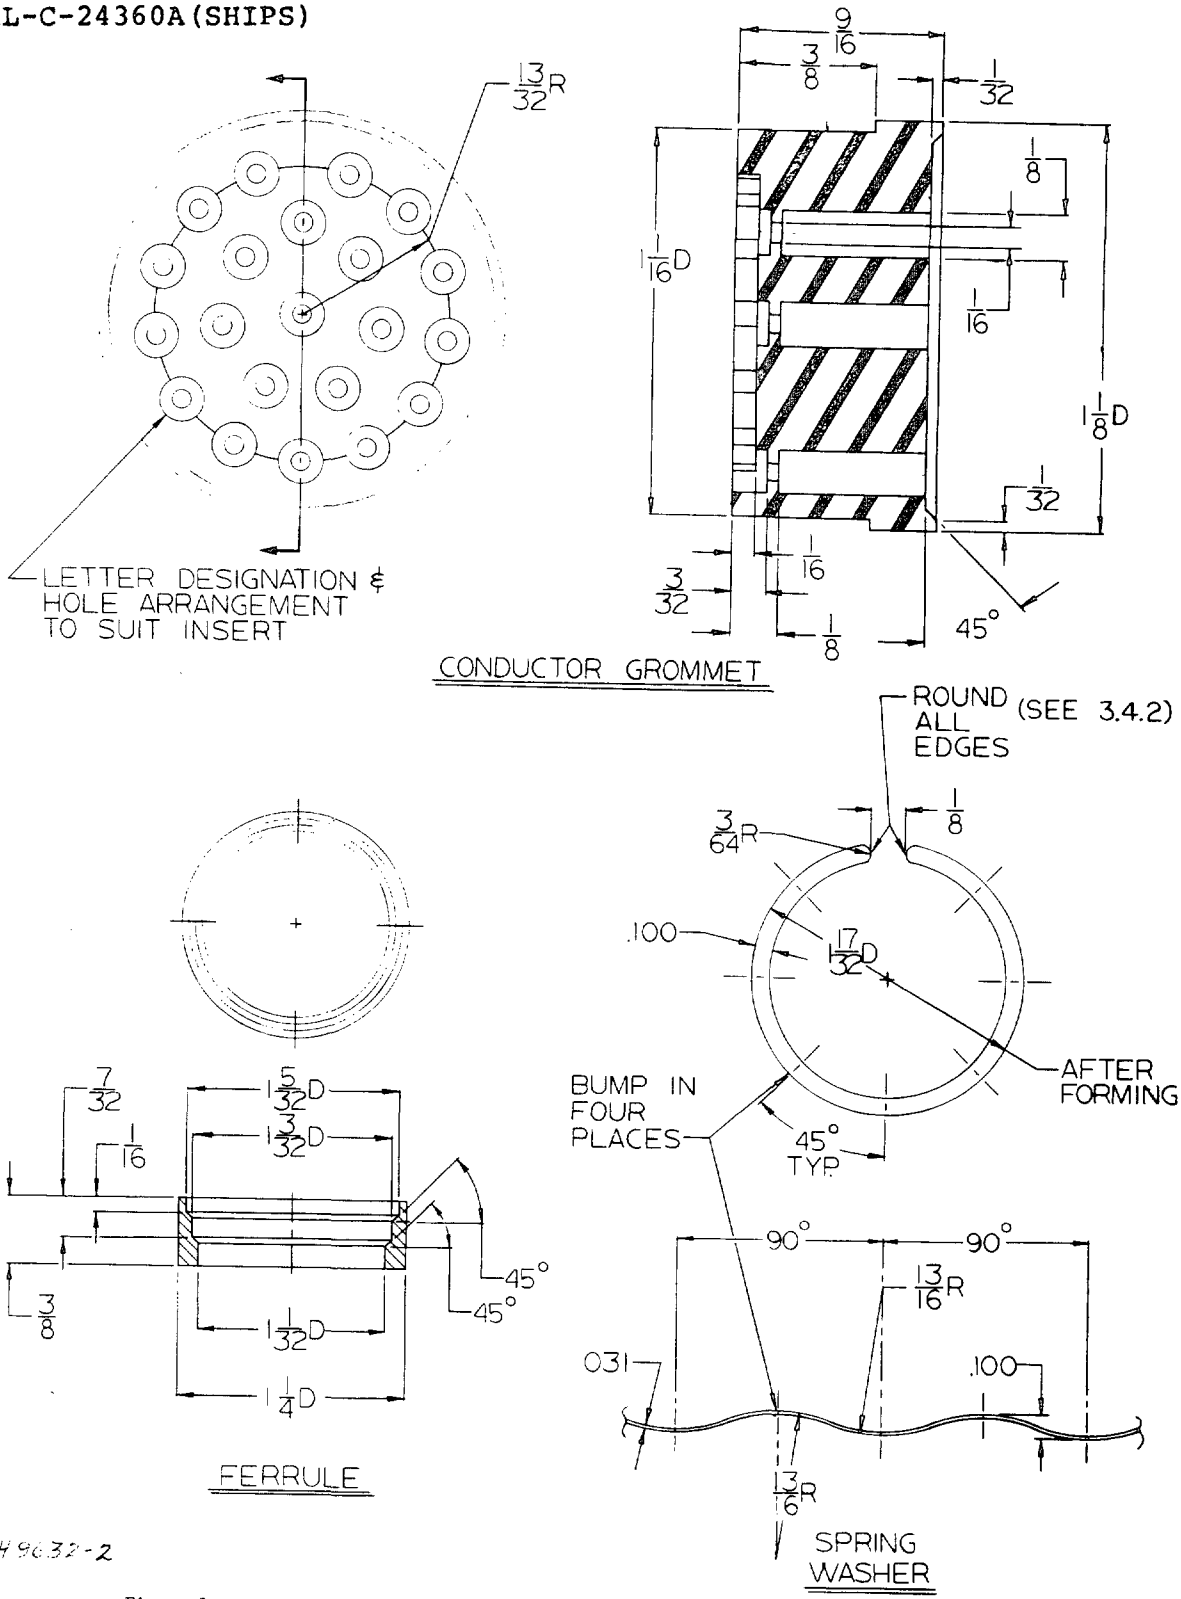


Figure 1 - Cable assembly, aircraft autonavigation alignment, umbilical (continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.

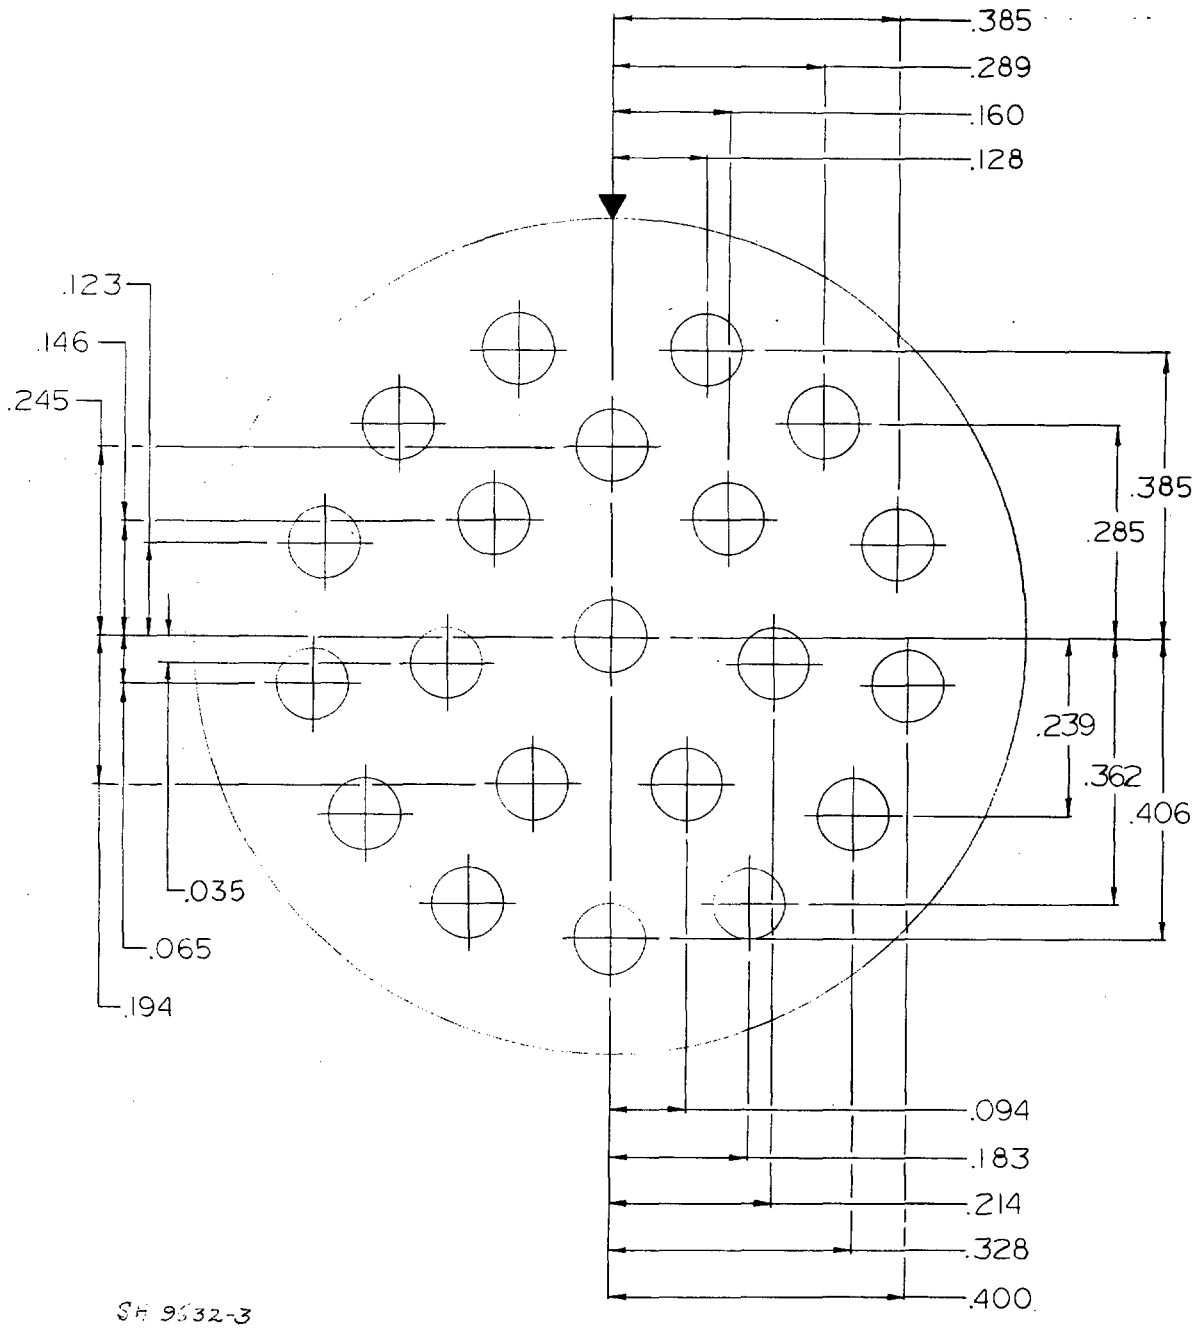

CONTACT ARRANGEMENT FOR INSERTS

Figure 1 - Cable assembly, aircraft autonavigator alignment, umbilical (continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.


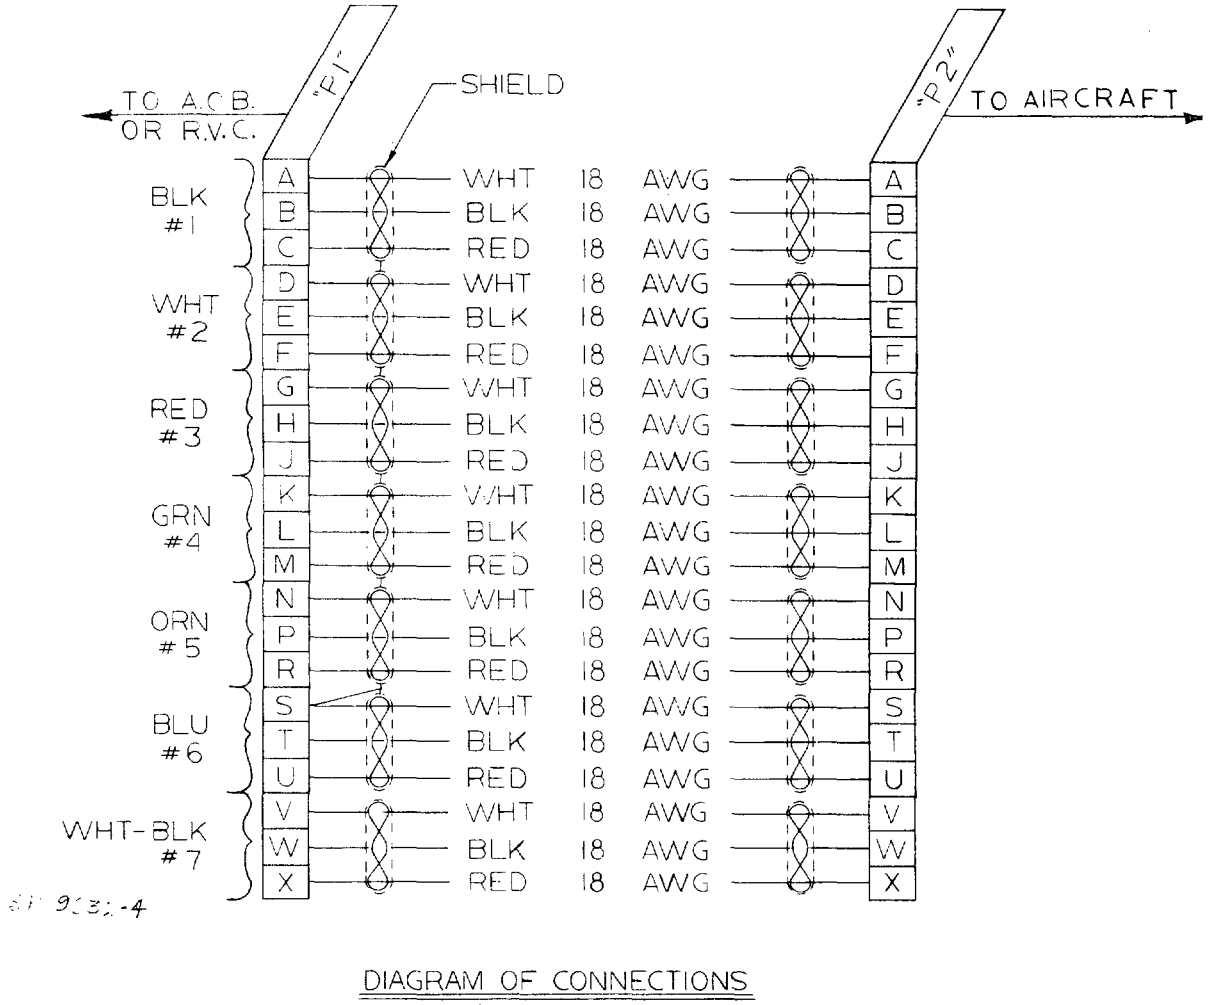


Figure 1 - Cable assembly aircraft autonavigator alignment, umbilical (continued)


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.

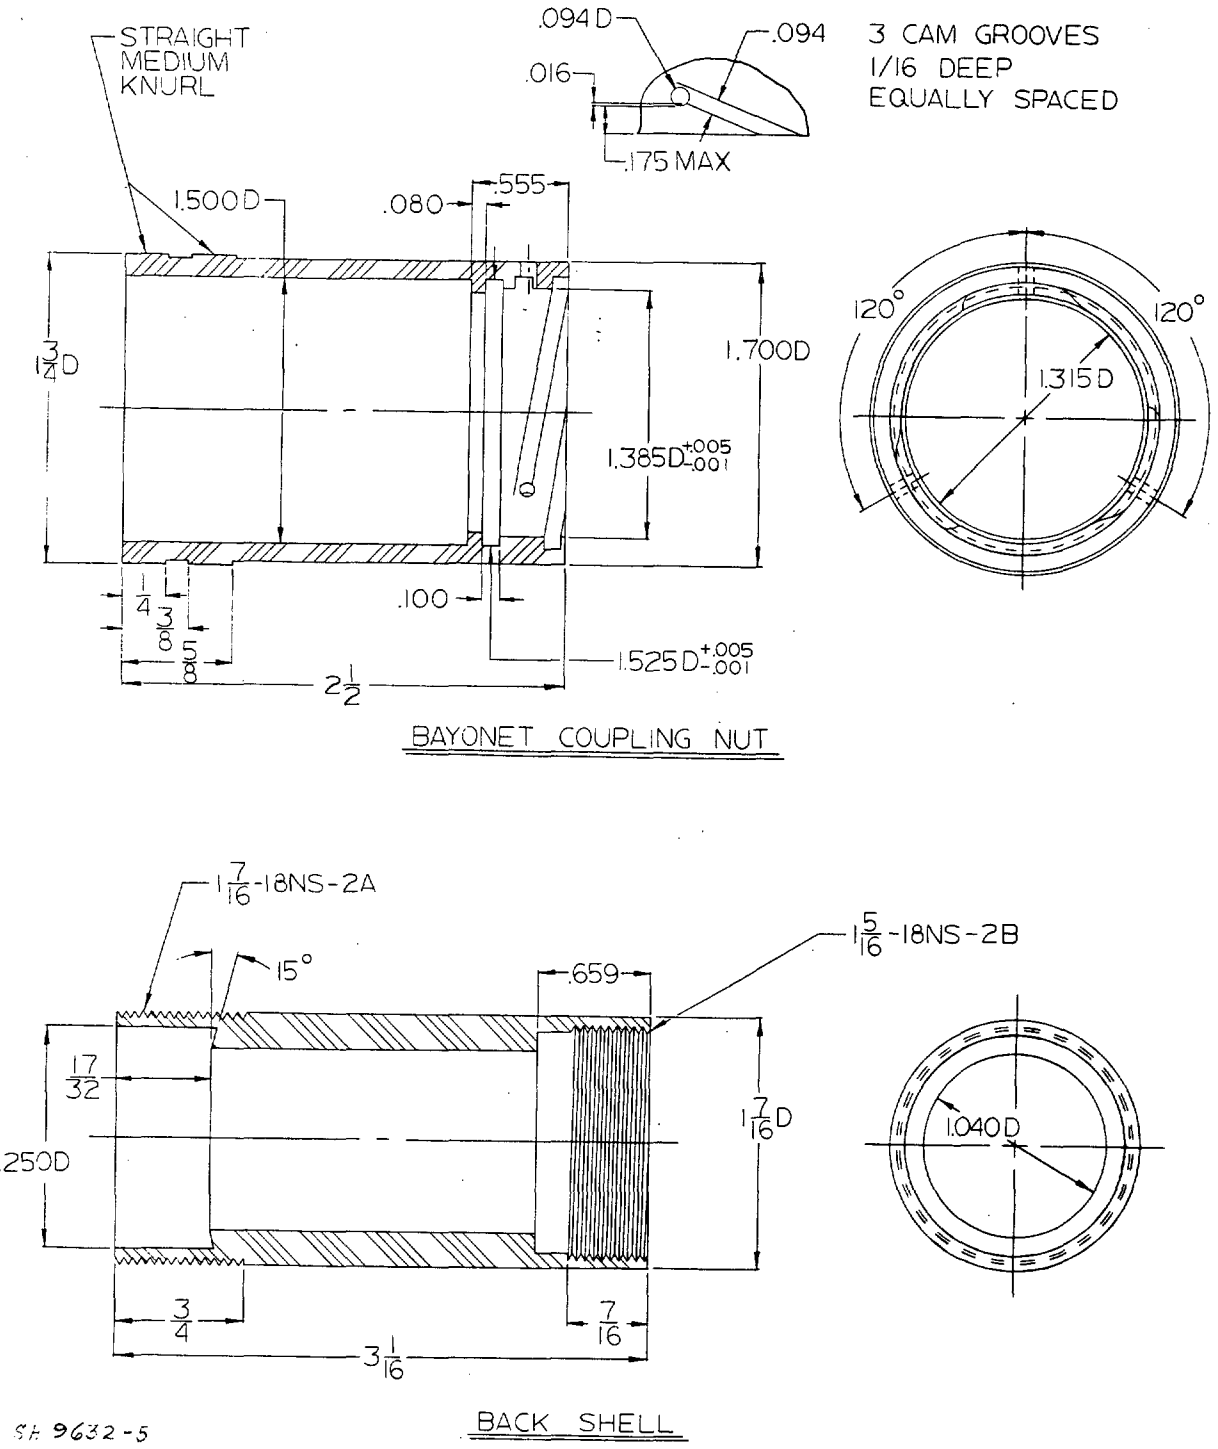


SH 9632-5

Figure 1 - Cable assembly, aircraft autonavigator alignment, umbilical (continued)


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.

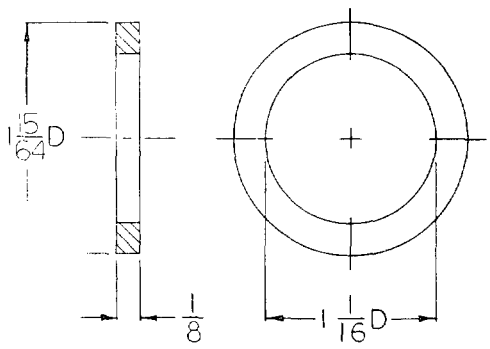

GLAND RING

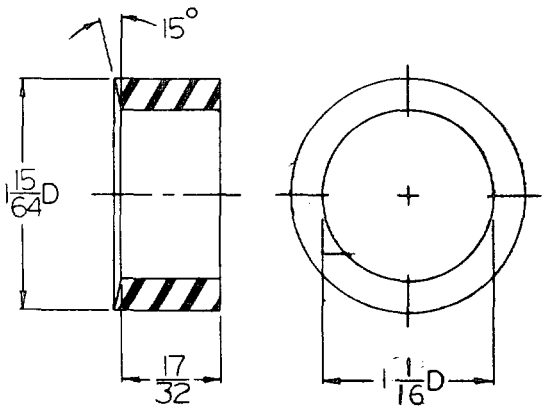

CABLE GROMMET

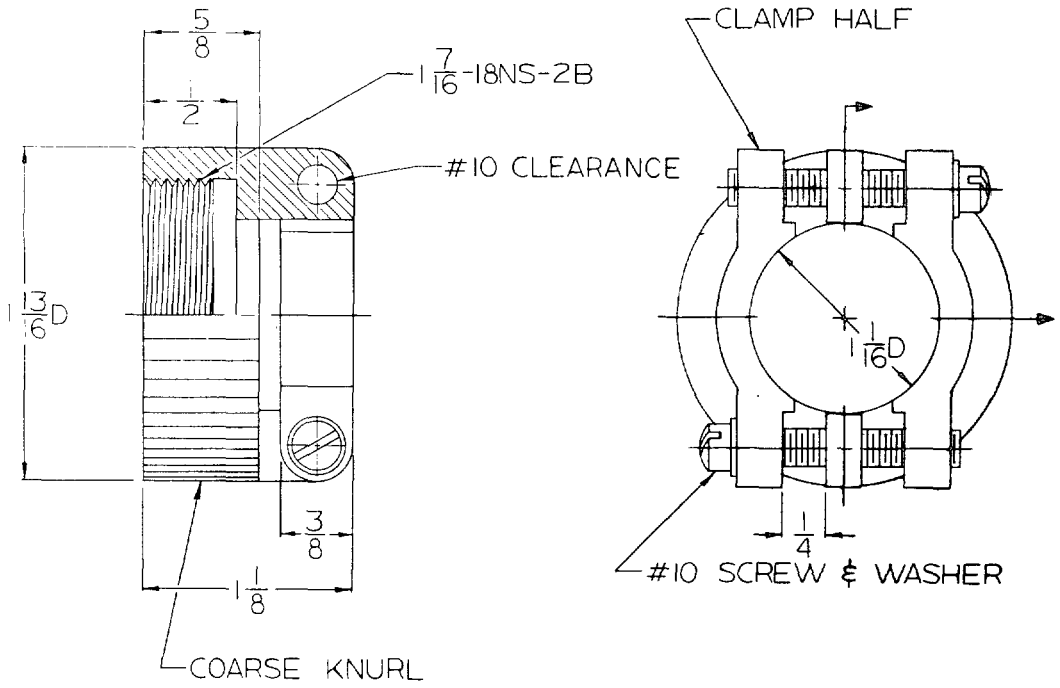


SH 9632-6


CLAMP ASSEMBLY

Figure 1 - Cable assembly, aircraft autonavigator alignment, umbilical (continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.

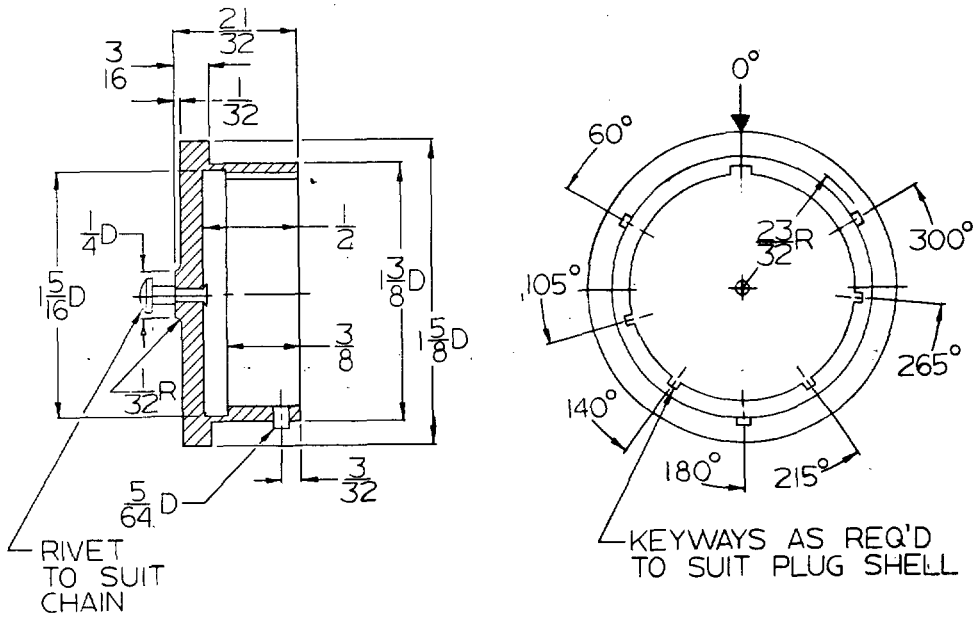

CAP ASSEMBLY

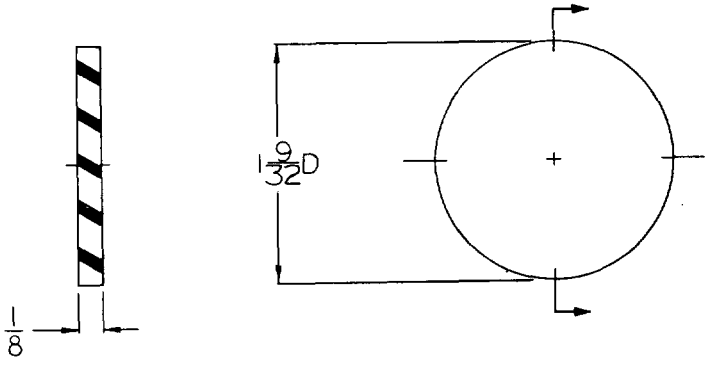

SH 9632-7

GASKET

Figure 1 - Cable assembly, aircraft autonavigator alignment, umbilical (continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD, FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE 0101-807-2000

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Ship Engineering Center
Center Building
Prince George's Center
Hyattsville, Maryland 20782

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

Commander, Naval Ship Engineering Center
DOD Standardization Program & Documents Branch
Center Building
Prince George's Center
Hyattsville, Maryland 20782

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:31Z
Check the source to verify that this is the current version before use.