MILITARY SPECIFICATION

COUPLINGS, SEGMENTED, AND SPLIT CLAMPS REATTACHABLE, 2-1/2-, 4-, 6- AND 7-INCH, FOR REFUELING-AT-SEA HOSE

This amendment forms a part of Military Specification MIL-C-24356A(SH), dated 21 April 1982, and is approved for use by the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Beneficial comments statement, line 3: Delete "SEA 3242" and substitute "SEA 55Z3".

PAGES 13 and 14

Figures 1 and 2: Delete and substitute the attached figures 1 and 2.

LAST PAGE


DD Form 1426, Standardization Document Improvement Proposal address: Delete "(SEA 3242)" and substitute "(SEA 55Z3)".

Preparing activity:
Navy - SH
(Project 4730-N513)

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:30Z
Check the source to verify that this is the current version before use.

NOTES:
1. ALL DIAMETERS MUST BE CONCENTRIC WITHIN 0.010" TIR.
2. TOLERANCES SHALL BE ±.005 ON DECIMAL DIM. ±1/64 ON FRACTIONS WHERE NOT SPECIFIED.
3. DETAILS NOT SPECIFIED SHALL BE AS DESIGNATED BY THE CONTRACTOR
4. ALL GROOVE SURFACES TO BE 63.

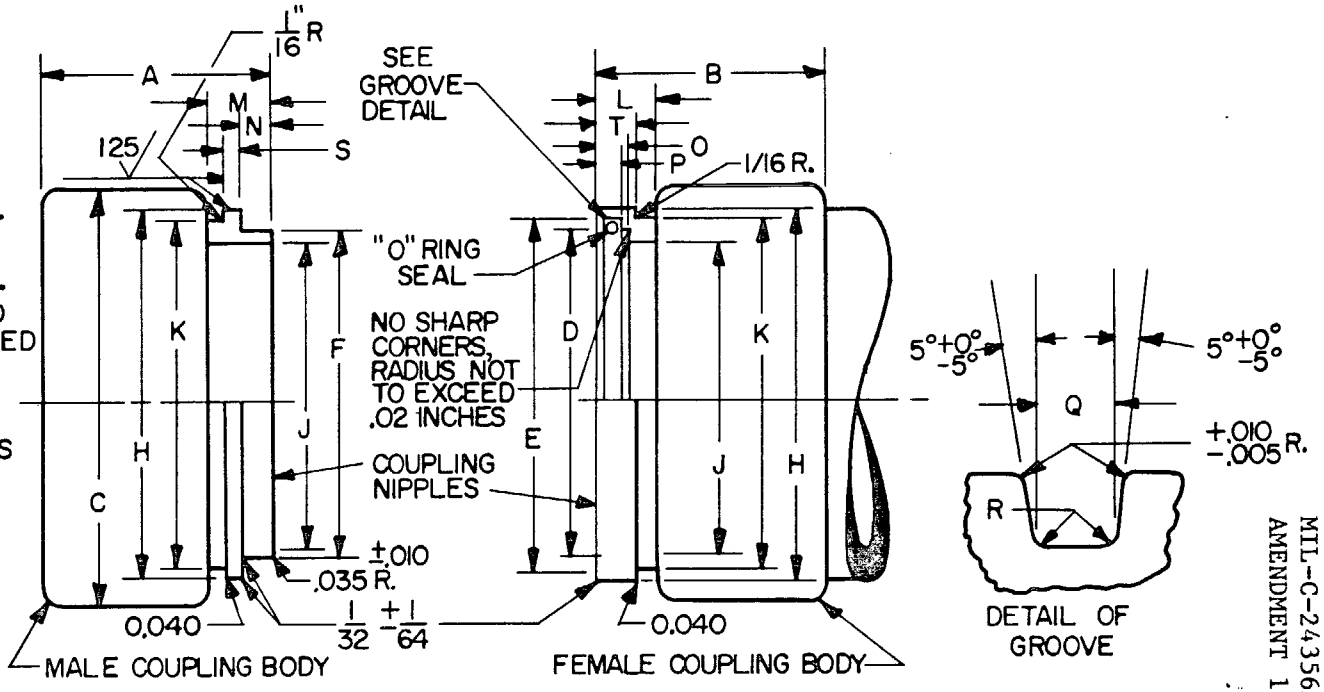


SH 49108

HOSE SIZE	A MAX	B MAX	C MAX	D	E	F ±.007	H ±.008	J ±.015	K ±.015	L MIN	M MIN	N ±.005	O ±.005	P ±.005	Q	R	S	T	MAX. WT. OF THE COUPLING ASSY
2-1/2"	5-3/8	5-3/8	5-1/4	3.010	3.240	3.000 / 2.995	3.748	2.200	2.750	.912	.960	.337 / .332	.347	.290	.210	.030	.332/.317	.608/.603	3.5
4"	6-1/4	6-1/8	6 3/4	4.140	4.510	4.122	4.812	3.700	4.343	1.29	1.35	.620	.645	.500	.284	.031	.339/.333	.901/.895	6.0
6"	6-7/8	6 11/16	8 3/4	6.265	6.741	6.247	7.102	5.800	6.625	1.22	1.37	.720	.745	.590	.380	.060	.339/.333	.901/.895	24
7"	7-7/8	7 11/16	9 3/4	7.265	7.741	7.247	8.102	6.700	7.625	1.31	1.46	.720	.745	.590	.380	.060	.339/.333	.901/.895	28

FIGURE 1. Reattachable coupling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:30Z
Check the source to verify that this is the current version before use.

NOTE: Alternate split clamp designs shall be as approved by NAVSEA. For such designs dimensions L, Q, S, U and Z are mandatory in order for the split clamp to work as intended.

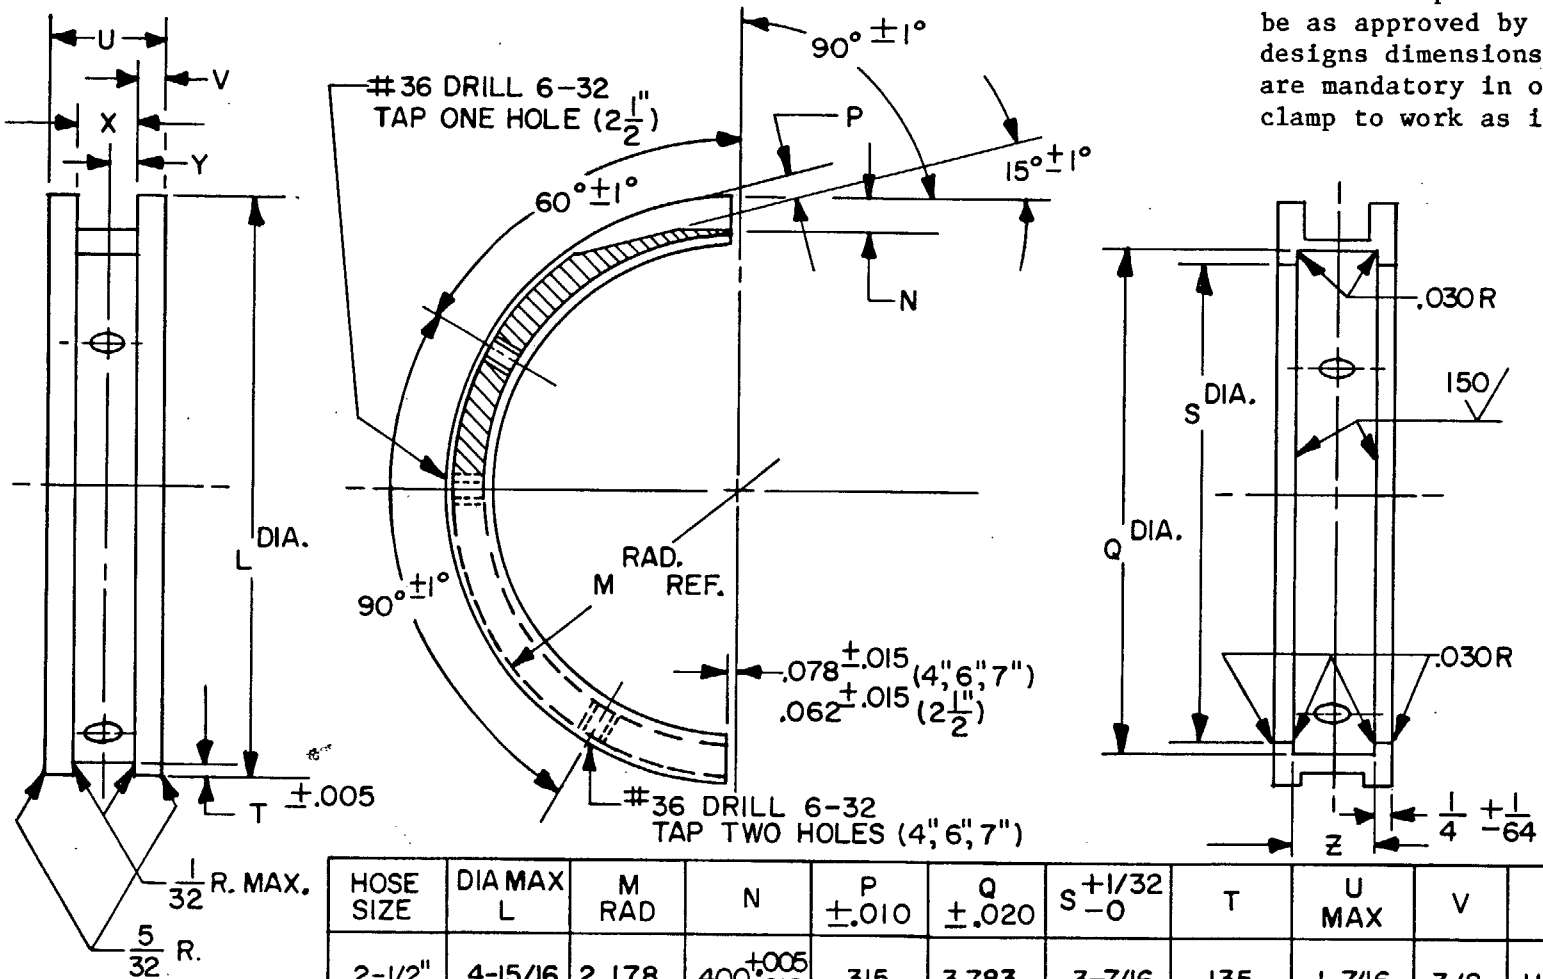

HOSE SIZE	DIA MAX L	M RAD	N	P ±.010	Q ±.020	S +1/32 -0	T	U MAX	V	X	Y	Z +.015 -.005
2-1/2"	4-15/16	2.178	.400 +.005 -.010	.315	3.783	3-7/16	.135	1-7/16	3/8	11/16	11/32	.937
4"	5-31/32	2.715	.400 +.005 -.010	.315	4.845	4-15/32	.140	1-3/4	15/32	13/16	13/32	1.250
6"	8 1/4	3.860	.400 +.005 -.010	.296	7.135	6-3/4	.140	1-3/4	15/32	13/16	13/32	1.250
7"	9 1/4	4.360	.400 +.005 -.010	.315	8.135	7-3/4	.140	1-3/4	15/32	13/16	13/32	1.250

SH 4911B

FIGURE 2. Split clamp half-details.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:30Z
Check the source to verify that this is the current version before use.