MIL-C-813E(MC)
8 October 1969
SUPERSEDING
MIL-C-813D(MC)
18 August 1965

MILITARY SPECIFICATION

CAPS, UTILITY: COTTON, SATEEN, GREEN

1. SCOPE

*1.1 Scope. This specification covers requirements for green cotton sateen utility caps.

*1.2 Classification. The caps shall be of the following types and sizes as specified (see 6.2):

Type I - With Marine Corps insignia
Type II - Without insignia

Schedule of sizes
Extra Small
Small
Medium
Large
Extra Large

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-276	- Thread Cotton.
UU-P-31	- Paper; General Specifications And Methods Of Testing.
UU-P-268	- Paper, Kraft, Untreated, Wrapping.
DDD-L-20	- Label; For Clothing, Equipage, And Tentage (General Use).

MILITARY

MIL-C-10296	- Cloth, Cotton, Sateen, Carded.
MIL-B-17757	- Boxes, Fiber, Corrugated (Modular Sizes).

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods.
FED-STD-751	- Stitches, Seams, And Stitchings.

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	- Marking For Shipment And Storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago, Illinois 60606.)

3. REQUIREMENT

*3.1 Sample. Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

*3.2 First article. Unless otherwise specified (see 6.2) before production is commenced, a finished cap shall be submitted, or made available, to the contracting officer or his authorized representative for approval. The approval (see 6.4) of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the supplier at the same facilities to be used for the manufacture of the production item.

3.3 Materials.

*3.3.1 Basic material. The basic material for the cap, including the sweatband, shall be cloth, cotton, sateen, carded, olive green shade 107 (see 6.3), 8.2-ounce, conforming to class 1 of MIL-C-10296.

3.3.2 Thread. The cotton thread shall conform to V-T-276, soft finish, type 1A3, ticket No. 40, 3-ply for all seaming and stitching.

*3.3.2.1 Color and colorfastness. The thread shall be dyed olive drab shade S-1, Cable No. 66022. The thread shall show fastness to perspiration, combined laundering and bleaching, and light equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show good fastness to perspiration, combined laundering and bleaching and light.

*3.3.3 Inner visor and front stays. The inner visor and the stays for the front of the crown shall be made out of a nonwoven material produced from a highly purified alpha cellulose vegetable fiber, wet web impregnated with approximately 22 +5 percent compounded neoprene and shall conform to the following physical requirements, when tested as specified in Section 4, Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

	Machine Direction	Cross Direction
Stiffness (load lb , min)		
Original	2.4	1.5
After laundering	2.4	1.5
After wet-dry cleaning	2.2	1.4
Tensile strength (lb per in , min.)	156	103
Stretch (percent max)	11	22
Tearing strength (gms. min)	1770	2040
Weight (lb per sq yd) 2.21 ±5		
Thickness 0.075 ±0.003 inch		

*3.3.3.1 Water absorption. The material shall not absorb more than 30 percent water when tested as specified in Section 4, Table III.

*3.3.3.2 Resistance to perspiration. The material shall show no embrittlement, development of stickiness, or delamination when subjected to the perspiration test specified in Section 4, Table III.

*3.3.3.3 Accelerated aging. The material shall show no embrittlement, development of stickiness, or delamination after 15 days in an oven with circulating air at 100°C when tested as specified in Section 4, Table III.

*3.3.3.4 Resistance to water. The material shall not shrink or warp after soaking in water 24 hours when tested as specified in Section 4, Table III.

*3.3.3.5 Directional marking. The finished alpha cellulose material shall be marked by directional symbols to designate the greater flexibility of the material. The marking shall be legibly and clearly designated on the textured side of the material.

*3.3.4 Eyelets. The eyelets shall be brass, rolled flange type, with the barrel scored 6 to 8 scores, and shall be enameled a color to closely match the shade of the basic material (see 3.3.1), or the flange only may be enameled. The eyelet shall conform to the following dimensions:

Outside diameter of barrel, inch:	0.185 ±0.004
Outside diameter of flange, inch:	0.312 ±0.005
Length of barrel under flange, inch:	0.145 ±0.004
Metal thickness, inch:	0.008 ±0.001

*3.3.5 Labels. Each cap shall have an identification and size label conforming to type I or type IV, class 4 of DDD-L-20. Any combination of the type I and type IV labels is permitted provided all required information is shown. Fastness for laundering shall apply.

*3.3.6 Insignia (type I cap). The Marine Corps insignia for the front of type I cap shall conform to the design and dimensions shown on Figures 1 and 2. The insignia shall be applied by decalcomania marking, transferred by heat and pressure. The transfer shall produce an imprint on the basic material which is clear and distinct with sharp outlines, the filled-in areas a solid black and the open areas of rope and globe clearly visible. The transferred marking shall be clearly visible after being subjected to three launderings when tested as specified in Section 4, Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

*3.4 Design. The cap shall be the design shown on Figures 1 through 4, having a one-piece crown shaped with eight evenly spaced folded and stitched darts; the two front darts provided with stays; two metal eyelets at each side of the crown for ventilation; the outside band and sweatband each one ply of basic material; and a flexible, quilted hinge type visor.

3.5 Patterns. The standard patterns furnished by the Government shall not be altered in any manner and shall be used only as a guide for cutting working patterns. These patterns show size, and are marked or notched for proper cutting, placement, and assembly of component parts.

*3.5.1 List of pattern parts. Caps shall be cut from the specified materials in accordance with the pattern parts indicated below:

Item	Pattern nomenclature Material: Cloth, cotton sateen, carded	No. of cut parts
1.	Crown	1
2.	Top visor cover	1
3.	Under visor cover	1
4.	Outside band	1
5.	Sweatband	1
	Material: Alpha cellulose fiber	
6.	Inner visor	1

Note: The pattern part for the front stay is not furnished, see operation 1.e for cutting requirements.

3.6 Construction.

3.6.1 Manufacturing requirements. The caps shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table I.

*3.6.1.1 Operations. The supplier is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the caps.

*3.6.1.2 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more stitch or seam types are specified for the same operation, any one of them may be used. Where stitch type 401 is used, the looper (under thread) shall be on the inside of the cap. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.2.1 Tacking and backstitching. Ends of seams and stitching, produced with 301 type stitch, when not caught in other seams or stitching shall be backstitched not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. When stitch type 401 is used, ends of seams and stitching shall be caught in other seams of stitching, and skipped stitches and thread breaks may be repaired using stitch type 301 backstitched not less than 1/2 inch on each side of the skip or break.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

*3.6.1.3 Shade marking. The component parts shall be marked to insure a uniform shade and size throughout the cap. Any method of shade marking may be used except:

(1) Corrosive metal devices.
(2) Adhesive-type tickets which show discoloration and the adhesive mass which adheres to the material upon removal of the tickets.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
1.	Cutting. a. Cut cap in strict accordance with patterns furnished by the Government. b. Cut parts in the direction of warp as indicated by directional lines on pattern. c. Cut component parts of cap from one piece of basic material, except sweatband, which may be cut from ends. Cloth shall be cut with the dull side (filling flush side) to finish on outside of cap. d. Cut inner visor with pattern placed side to side across the width (cross direction) of material specified in 3.3.3, so that the greater flexibility of the cut visor is from side to side (see Figure 4). e. Cut two stays for front of crown from inner visor material in the form of a right angle triangle, measuring approximately 1 inch at base and 2-1/2 inches from base to apex.					
2.	Replacement of damaged parts. a. Replace at time of cutting any part of the cap containing holes, seriously weakening defects such as smashes, multiple floats, loose or weakening slubs, etc. expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc. affecting appearance. b. Replace any part damaged during manufacturing process by needle chews which may develop into holes, scissors or knife cuts, tears, holes, mends, burns and large drill holes in the material affecting appearance.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
3.	Shade marking.					
	a. Mark, ticket or bundle all component parts (see 3.6.1.3) cut from one piece of basic material, except those parts cut from ends, (see 1.c) to insure uniform shade and size throughout the cap. Any size part cut from ends shall be identified as to size.					
4.	Mark caps.					
	a. When identification and size marking type of label is used (see 3.3.5), markings shall be legibly applied and correctly positioned on sweatband without smearing. Marking shall be thoroughly dry prior to assembly of cap.					
	b. Labels shall be applied to sweatband either to the left or right side of the joining seam.					
5.	Make crown.					
	Finished appearance. Darts shall finish without gathers, puckers or pleats.					
	a. Fold and stitch crown darts in accordance with marks as indicated on pattern, tapering upper end of darts to a point. The point shall be securely tacked or backstitched.	301	OSf-1	12-14	40/3	40/3
	b. Fold crown at upper edge of three front panels formed by darts and stitch 1/16 inch from folded edge.	301	OSf-1	12-14	40/3	40/3
	c. Apply Marine Corps insignia (type I cap) to center front of crown with heat and pressure. The imprint shall be clear and distinct and shall be vertically centered on front of crown 1/4 +1/8 inch below stitched upper edge of center front panel or, apply Marine Corps insignia to center front panel with heat and pressure prior to making the darts.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
6.	Attach eyelet to crown.					
	Finished appearance. Eyelet shall be positioned and securely attached through each side of crown and securely clinched on inside without distorting and cutting material or splitting the flange of the eyelet. In the finished cap, the eyelets shall be centered 1 ±1/8 inches above top edge of outside band.					
	a. Attach two metal eyelets through each side crown. Eyelets shall be centered 1-1/4 ±1/8 inches apart and equidistant from back and front side darts.					
7.	Insert stays.					
	a. Insert stays in the two center front darts and stitch around crown 1/8 to 1/4 inch from lower edge. When stitching, turn the fold of all darts, except the two at the center back towards the front of crown. Turn the fold of the two center back darts toward the back of crown.	301	SSa-1	6-8	40/3	40/3
		or 401	SSa-1	6-8	40/3	40/3
8.	Make outside band.					
	a. Fold under lower edge of band 1/4 inch and stitch 1/6 inch from folded edge.	301	EFa-1	10-14	40/3	40/3
		or 401	EFa-1	10-14	40/3	40/3
	b. Join ends of band with a 1/4-inch seam and securely backstitch both ends of stitching.	301	SSa-1	10-14	40/3	40/3
9.	Make sweatband.					
	a. Fold under lower edge of sweatband 1/4 inch and stitch 1/16 inch from folded edge.	301	EFa-1	10-14	40/3	40/3
		or 401	EFa-1	10-14	40/3	40/3
	b. Join ends of band with a 1/4-inch seam and securely backstitch both ends of the stitching.	301	SSa-1	10-14	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
10.	Make visor.					
	Finished appearance. The visor shall be smooth and free of wrinkles, gathers, puckers, or other distortion. Quilting of visor shall be uniform.					
	a. Position top and bottom plies (basic material) for visor face to face with outer edge even and notches matching. Stitch together 1/4 inch from the raw edge, distributing the fullness of bottom ply between notches.	301 or 401	SSa-1	10-14	40/3	40/3
			SSa-1	10-14	40/3	40/3
	b. Place seamed pieces of basic material on inner visor with top piece next to the inner visor with outer edge of all pieces aligned.					
	c. Join together all pieces of visor around outer edge, stitched 1/4 to 5/16 inch from edge.	301 or 401	SSa-1	6-8	40/3	40/3
			SSa-1	6-8	40/3	40/3
	d. Turn bottom piece to underside of inner visor forming a smooth front edge with an even binding affect. Raise stitch the binding affect through all plies with the raise stitching 1/16 to 1/8 inch on the seamed edge of simulated binding.	301		6-8	40/3	40/3
	e. Quilt visor through all plies with 4 rows of stitches evenly spaced 3/8 inch apart and parallel to outer edge of visor.	301	SSv-4	6-8	40/3	40/3
11.	Assemble cap.					
	Finished appearance. The outside band and sweatband shall be smoothly and evenly seamed to the cap without wrinkles, puckers, gathers, twists or other distortions. Outside band shall finish 1-1/4 ±1/8 inches wide. Sweatband shall finish 1-3/8 ±1/8 inches wide.					
	a. Place lower edge of crown between top edge of outside band and sweatband with all raw edges even and with joining seam of outside band aligned with joining seam of sweatband at center back of crown.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
11.	**Assemble caps.** (cont'd)					
	b. Join outside band and sweatband to crown 3/8 inch from lower edge of crown, catching one edge of cloth identification-size label in seam near inside center back of cap either to the left or right of joining seam of sweatband.	301 or 401	SSa-1	8-10	40/3	40/3
			SSa-1	8-10	40/3	40/3
	c. Turn outside band and raise stitch 1/16 inch from seam.	301	LSq-2 (shows finished seam)	12-14	40/3	40/3
	d. Position sweatband on underside of visor in accordance with notches shown on pattern. Hemmed lower edge of sweatband shall be lapped on hinge of visor with back edge of inner visor.					
	e. Seam sweatband to visor not more than 1/16 inch from hemmed lower edge, stitched through hinge of visor but not through inner visor.	301 or 401	LSb-1	12-14	40/3	40/3
			LSb-1	12-14	40/3	40/3
	f. Seam outside band to sweatband 1/16 inch from hemmed lower edges and with hemmed lower edge of outside band lapped on hinge of visor and aligned with back edge of inner visor.	301	SSc-1	12-14	40/3	40/3
	g. Seam outside band to visor 1/16 inch from hemmed lower edge, stitched through hinge of visor but not through inner visor. Stitching, joining the outside band to the sweatband and visor, shall start and finish at center back of cap with the ends of the stitching lapped not less than 1 inch.	301	LSb-1	12-14	40/3	40/3
12.	Clean cap.					
	a. Trim all ends of stitching and remove all loose ends of thread from cap. Remove all spots and stains, and remove all shade tickets and marking without injury to the material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

*3.7 Finished measurements. The finished caps shall conform to the measurements shown in Table II and Figure 2.

Table II. - Finished measurements. 1/

Size	Head measurement
Extra Small	21-1/4
Small	22
Medium	22-3/4
Large	23-1/2
Extra Large	24-1/4

1/ Tolerance: +1/4 inch, -0

3.8 Workmanship. The finished caps shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Inspection. Inspection shall be in accordance with provisions of MIL-STD-105, except where otherwise indicated herein.

*4.2.1 First article inspection. When first article is required, it shall be inspected as specified in 4.2.4.1 and 4.2.4.2 for compliance with design, construction, workmanship, and dimensional requirements.

*4.2.2 Testing of components. Testing of components shall be in accordance with applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing specified in FED-STD-191 and UU-P-31, wherever applicable, and as listed in Table III shall be followed. All requirements are applicable to sample unit. When the data as to number of determinations per sample unit and the results reported as columns are not specified in Table III, they shall be as required by the referenced test method. The unit for expressing lot sizes and sample unit for testing each component shall be in accordance with applicable subsidiary specification and as follows:

Component	Lot size expressed as	Sample unit for testing
Nonwoven fibrous material (inner visor and stays)	yards	-1 square yard
Eyelets	each	-15
Insignia (decalcomania)	each	-15

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:31Z
Check the source to verify that this is the current version before use.

Table III. - Test Methods

Component	Characteristic	Rqmt. para.	Test method	No. of determinations per sample unit	Results reported as
Inner visor and front stays	Material identification	3.3.3	1/	1	Pass or fail
	Compounded neoprene content	3.3.3	1/	1	To the nearest %
	Stiffness:				
	Original	3.3.3	5202 2/		
	After laundering	3.3.3	5610/5202 2/		
	After wet dry cleaning	3.3.3	5622/5202 2/		
	Tensile strength	3.3.3	171 3/	10	To the nearest 1.0 lb.
	Stretch	3.3.3	171 3/	10	To the nearest %.
	Tearing strength	3.3.3	170 3/	5	To the nearest Gm.
	Weight	3.3.3	Scale	1	To the nearest 1b/ sq yd.
	Thickness	3.3.3	Gage	1	To the nearest 0.001 inch.
	Water absorption	3.3.3.1	5502 2/	1	Pass or fail
	Perspiration	3.3.3.2	5680 2/	1	Pass or fail
	Accelerated aging	3.3.3.3	4/	1	Pass or fail
	Shrinkage	3.3.3.4	5/	1	Pass or fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

Table III. - Test Methods

Component	Characteristic	Rqmt. para.	Test method	No. of determinations per sample unit	Results reported as
Eyelets	Material identification	3.3.4	Std. Comm'l	1	Pass or fail
	Flange color	3.3.4	Visual	1	Pass or fail
	Barrel				
	Scores	3.3.4	Visual	1	Pass or fail
	Outside diameter	3.3.4	Std. Comm'l	1	Pass or fail
	Length	3.3.4	Std. Comm'l	1	Pass or fail
	Flange				
	Outside diameter	3.3.4	Std. Comm'l	1	Pass or fail
	Metal thickness	3.3.4	Std. Comm'l	1	Pass or fail
Insignia (applied on swatches of basic material)	Insignia shall be clearly visible after laundering 6/	3.3.6	5610	3	Pass or fail

1/ A certificate of compliance is required and will be acceptable for the requirement stated. (see para 4.3)

2/ FED-STD-191

3/ UU-P-31

4/ The material shall be kept in a forced circulating air over 15 days at 100°C.

5/ The material shall be soaked in water at room temperature for 24 hours.

6/ Test to be performed three times prior to evaluation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

*4.2.3 Sampling for testing. Government furnished materials shall not be sampled or tested unless specifically requested by the Government. Unless a component is covered by a subsidiary specification that specifies the inspection level and acceptable quality level (AQL) for testing, the inspection level shall be S-1 and AQL shall be 4.0 of MIL-STD-105.

*4.2.4 Examination of the end item. The defects found during examination shall be classified in accordance with 4.2.4.1 and 4.2.4.2. The applicable inspection levels and AQL's shall be as indicated in 4.2.4.3. The sample unit for these examinations shall be one cap.

*4.2.4.1 Classification of defects. All defects shall be classified in accordance with the following.

Examine	Defect	Classification Major	Minor A	Minor B
Material defects and damages	a. Any hole.	X		
	b. Any weakening defects, such as a smash, multiple float, loose slub, which may develop into a hole.	X		
	c. Shade bar or unsightly slub, affecting appearance.	X		
	d. Needle chew, cut, tear or mend.	X		
Note: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which weakens the fabric or garment, or when it is so conspicuously located as to be clearly noticeable. Non-weakening conditions which are inconspicuous shall not be classified as defects.				
Shaded parts	Any outside part shaded (affecting appearance).		X	
Cleanness	a. Spots or stains of an obvious permanent nature.		X	
	b. Removable spots or stains, clearly noticeable.		X	
	c. Thread ends not trimmed or loose threads not removed.			X
	d. One or more shade tickets not removed.			X
	e. Shade stamp marking exposed on outside of caps, seriously affecting appearance.	X		

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:31Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Component and assembly	a. Any defective component or defect of assembly (unless otherwise classified).		X	
	b. Any component part or required operation omitted (unless otherwise classified).	X		
Seams and stitching	a. Accuracy of seaming:			
	- Part of cap caught in any unrelated operation of stitching.		X	
	- Seams twisted, puckered, or pleated (unless otherwise classified herein).		X	
	- End(s) of stitching when not caught in other seams of stitching backstitched less than 1/4 inch.		X	
	- Stitching overlapping the end(s) of thread break less than 1/2 inch.			X
	b. Gage of stitching (top, edge, raised or quilting stitches):			
	- Irregular, i.e., unevenly gaged or various stitching not uniform affecting appearance (to be scored when condition exists on major portion of seam).		X	
	- Edge of raised stitching sewn too close to edge, resulting in damage to cloth.	X		
	- Beyond range or width specified or varies more than 1/16 inch when no range is specified.			X
	c. Open seams:			
	- 1/8 inch or more but not more than 1/4 inch.			X
	- more than 1/4 inch but not more than 3/4 inch.		X	
	- more than 3/4 inch.	X		

Source: https://assist.dla.mil -- Downloaded: 202640-16T11:31Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Note: One or more broken or two or more continuous skipped or run-off stitches constitute an open seam.				
	d. Raw edges:			
	- 1/4 inch or less.			X
	- more than 1/4 inch but not more than 3/4 inch.		X	
	- more than 3/4 inch.	X		
Note: Raw edges not securely caught in stitching shall be classified as an open seam.				
	e. Run-off:			
	- Joining seams- When resulting in an open seam use "Open Seam" classification.			
	- Top, edge, quilting or raised stitching (when not resulting in an open seam).			
	- On outside:			
	- more than 1/2 inch.		X	
	- 1/4 inch or more but not more than 1/2 inch.			X
	f. Seams and stitch types:			
	- Not specified seam or stitch type.		X	
	- Looper thread of 401 stitch type on outside of finished cap.	X		
	g. Stitch tension:			
	- Loose tension on raised or edge stitching, i.e., loosely exposed loops of lower or top thread.		X	
	- Loose tension resulting in a loose seam.	X		
	- Tight tension (stitches break when normal strain is applied to seam or stitching).	X		
Note: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in lengthwise direction of seam.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	h. Stitches per inch (to be scored only when the condition exists on major portion of the seam or stitching).			
	- On all seams or stitching.			
	- less than minimum number specified by:			
	- not more than 2 stitches.			X
	- more than 2 but not more than 4 stitches.		X	
	- more than 4 stitches.	X		
	- one or more stitches in excess of maximum number specified.			X
	i. Stitches skipped or broken:			
	- On edge or raised stitching when seam is seamed, turned and stitched:			
	- more than 1/4 inch.			X
	- On visor quilting stitches:			
	- more than 1/4 inch on one row of stitching.			X
	- more than 1/4 inch on two or more rows of stitching.		X	
Eyelets	a. Any omitted or added.		X	
	b. Defective eyelets (but securely clinched):			
	- 1 eyelet.			X
	- 2 or more eyelets.		X	
	c. Not properly clinched, i.e., loose or raw edges of material exposed around edge of eyelet on outside of cap:			
	- 1 eyelet.		X	
	- 2 or more eyelets.	X		
	d. Not specified type, size, color or finish.		X	
	e. Position less than 7/8 inch or more than 1-1/8 inches from center of eyelet to top edge of outside band.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	f. Distance between eyelets from center to center less than 1-1/8 inches or more than 1-3/8 inches.			X
	g. Center of eyelets not equidistant from front and side darts by more than 1/4 inch.			X
Visor	a. Upper or lower plies of material badly wrinkled or puckered, pleated or excessively full between rows of quilting stitches.		X	
	b. Visor interlining caught in stitching joining bands to visor (to be scored when the condition exists on major portion of seaming).		X	
	c. Number of rows of quilting stitches (including row at finished edge of visor):			
	- 5 or less.		X	
	- 7 or more.			X
	d. Visor not centered with center front of cap:			
	- more than 1/2 inch.	X		
	- more than 1/4 inch but not more than 1/2 inch.		X	
	e. Edge of outer material not firmly folded over edge of inner visor, i.e., excess material extends 1/8 inch or more beyond edge of inner visor.			X
	f. Finished edge of visor less than 3/16 inch or more than 5/16 inch wide.			X
	g. Edge of visor poorly shaped, affecting appearance.		X	
	h. End(s) of visor insecurely caught in stitching of outer and inner bands.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	1. Width of visor at center less than 2-1/2 inches or more than 2-3/4 inches.			X
Band (outside)	a. Width less than 1-1/8 inches or more than 1-3/8 inches.			X
	b. Twisted, pleated or excessively full.	X		
	c. Irregular in width by 3/16 inch or more.	X		
	d. Back seam of band offset from mid-point between back crown darts by more than 1/4 inch.			X
Crown	a. Edge stitching along top edge at front omitted.	X		
	b. End(s) of stitching along top edge at front:			
	- extending beyond outer dart(s) at either end by 1/2 inch or more.			X
	- not extending to outer dart(s) at either end by 1/4 inch or more.			X
	c. Height of crown at center front including band measures less than 3-3/8 inches or more than 3-5/8 inches.			X
	d. Height of crown at end of visor including band measures less than 2-7/8 inches or more than 3-1/8 inches.			X
	e. Crown puckered or pleated at joining to crown.		X	
Darts	a. Any dart omitted.	X		
	b. Folding of darts:			
	- back of darts not folded toward back of crown.		X	
	- center front darts not folded toward front of crown.		X	
	- all other darts on front and sides not folded toward front of crown.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	c. Ends not properly tapered on one or more darts.			X
	d. Front stay(s) omitted.	X		
Insignia (Type I Cap only)	a. Not specified type, size or color.		X	
	b. Not properly transferred, i.e., indistinct or blurred.		X	
	c. Set on crookedly, affecting appearance.		X	
	d. Top edge placed less than 1/8 inch or more than 3/8 inch below folded (stitched) edged of crown.			X
	e. Offset between front darts by 3/8 inch or more.		X	
Sweatband	a. Ends of stitching joining outer band and sweatband at center back overlapping less than 1 inch.			X
	b. Sweatband exposed below bottom edge of cap by 1/8 inch or more:			
	- for a distance 1/2 inch or more, but not more than 1 inch.			X
	- for a distance of more than 1 inch.		X	
	c. Twisted or tight, affecting appearance of outside band.			X
	d. Joining seam of sweatband out of alignment with joining seam of outside band by more than 1/2 inch.			X
	e. Width less than 1-1/4 inches or more than 1-1/2 inches.			X
Labels	a. Size label omitted, incorrect or illegible.	X		
	b. Contractor's label:			
	- omitted, incorrect or illegible.		X	
	- not securely caught in stitching when cloth label is used.		X	
	c. Size shown on the item label not in conformance with size shown on outer container.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

*4.2.4.2 **Measurements.** Any measurement deviating from nominal dimension and tolerance specified in Table II shall be scored as a size measurement defect.

*4.2.4.3 **Acceptable quality levels and inspection levels.** The inspection levels and AQL's expressed in defects per hundred units (DHU) shall be as follows:

For defects listed in 4.2.4.1	AQL's	Inspection level
Major	2.5	II
Major and Minor A (combined)	10.0	
Totals (Major, Minor A and B (combined)	15.0	
For defects listed in 4.2.4.2 (size measurements)		
One class	4.0	S-3

*4.2.5 **Examination of preparation for delivery requirements.** An examination shall be made to determine compliance with the packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 DHU.

Examine	Defects
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling, bulging or distortion of containers.
Content	Number of bundles per shipping container is more or less than required. Number of caps per bundle is more or less than required. 1/

1/ For this defect, one bundle shall be examined from each shipping container in the sample.

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:31Z
Check the source to verify that this is the current version before use.

*4.3 Certificate of compliance. Where certificates of compliance are submitted, the government reserves the right to check test such items to determine the validity of the certification.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

*5.1.1 Level A. Ten (10) caps of one type and size only shall be nested together in a bundle, with visors lying flat, and cross-tied with cotton tape or twine.

*5.1.2 Level C. The caps shall be packaged in accordance with the manufacturers' commercial practice.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.

*5.2.1.1 Method 1. Two hundred (200) caps of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner conforming to class-weather resistant, size No. 3A of MIL-B-17757 and assembled, closed, and reinforced as specified in the appendix to the box specification. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Toward the end of the contract, or when there is less than the required amount of the same size per container, mixed sizes may be packed within the same shipping container (see 5.3.1).

*5.2.1.2 Method 2. When specified (see 6.2), three level B shipping containers (600 caps of one type and size only) shall be overpacked in a fiberboard shipping container conforming to class-weather resistant, size No. 4 of MIL-B-17757. Toward the end of the contract, or when there is less than the required amount of the same size per container, mixed sizes may be packed within the same shipping container (see 5.3.1).

*5.2.2 Level B. Two hundred (200) caps of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner conforming to class domestic, size No. 3A of MIL-B-17757 and assembled, closed and reinforced as specified in the appendix to the box specification. The fiberboard used in fabricating the box and liner shall be grade 275 and 200, respectively. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Toward the end of the contract, or when there is less than the required amount of the same size per container, mixed sizes may be packed within the same shipping container (see 5.3.1).

5.2.3 Level C. Caps, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202640-16T11:31Z
Check the source to verify that this is the currenversion before use.

5.3.1 Labels. Each shipping container packed with mixed sizes shall have securely attached to the end and side a white paper label, 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly printed the correct quantity and sizes contained therein.

6. NOTES

***6.1 Intended use. The caps are intended for wear by male personnel of the Marine Corps and Navy.**

*6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Size and type required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When level A, method 2, packing is required (see 5.2.1.2).

6.3 Sample and shade sample. For information regarding the availability of sample cap, and of the standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

*6.4 First article. Examinations, tests and approval shall be as specified by the contracting officer (see 3.2).

*6.5 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship of the last previous issue.

Custodians:
Navy - MC


Review activities:
Navy - MC, SA

User activities:
Navy - YD


Preparing activity:
Navy - MC

Project Number
8405-N327

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:31Z
Check the source to verify that this is the current version before use.

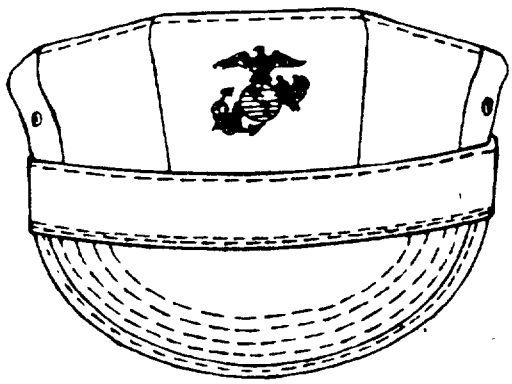

TYPE I

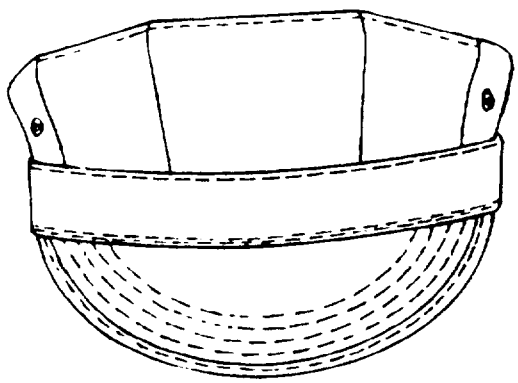

TYPE II

FIGURE 1. CAP, UTILITY: COTTON, SATEEN, GREEN

M.C.S.A
826:R.G.F
8 Oct '69

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

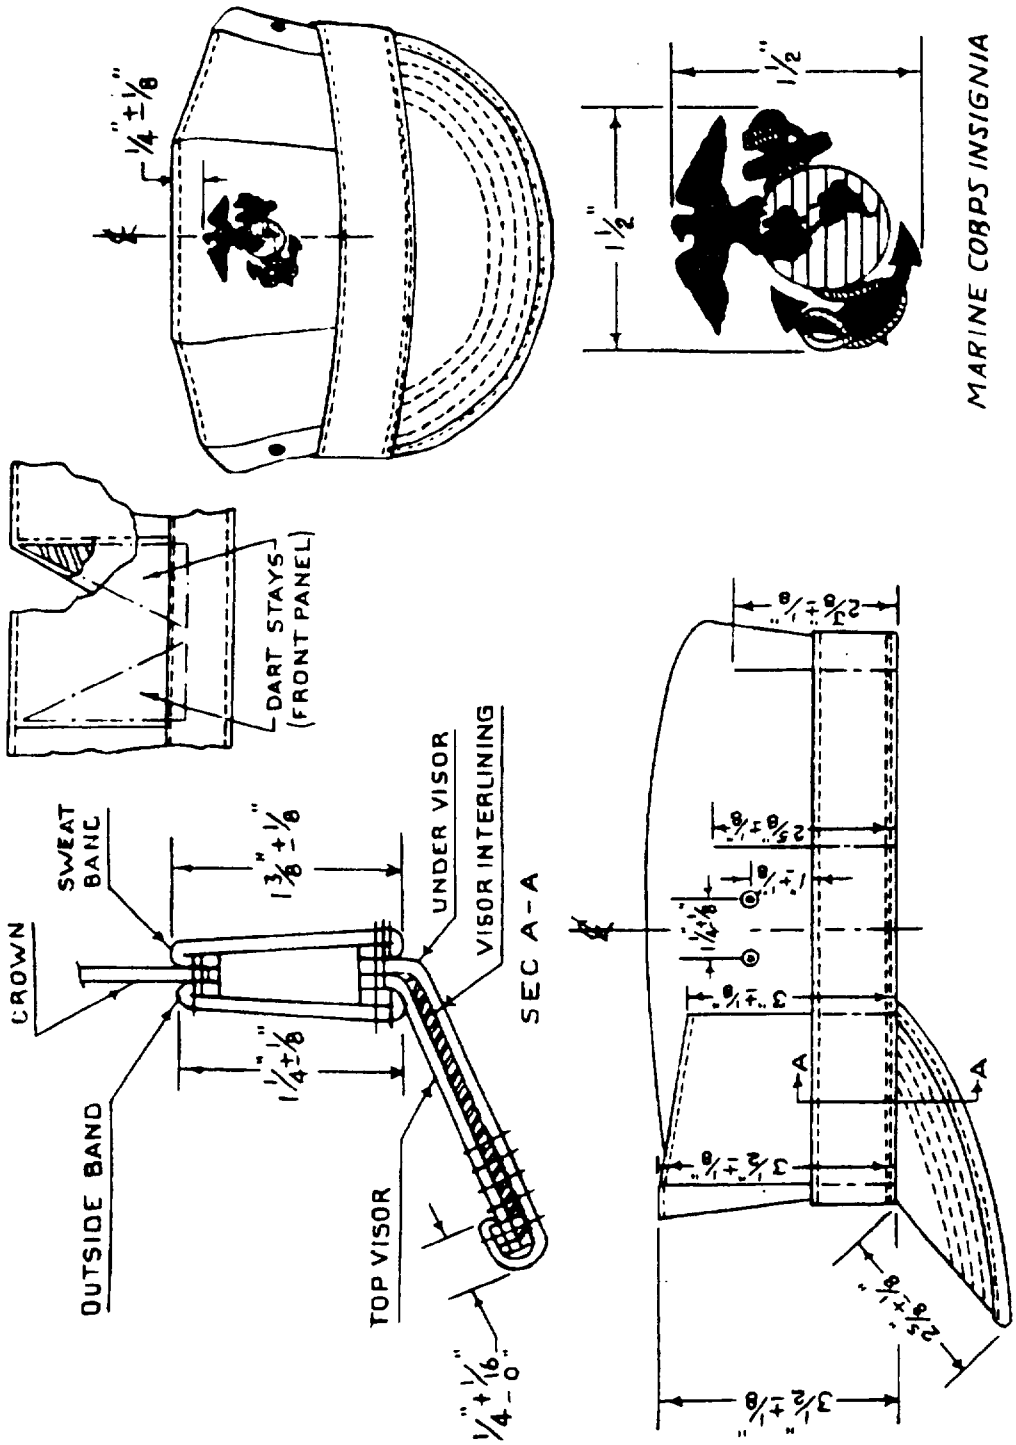


FIGURE 2. CAP, UTILITY; COTTON, SATEEN, GREEN

M.C.S.A. 826:R&F 8 Dec '69

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:31Z
Check the source to verify that this is the current version before use.

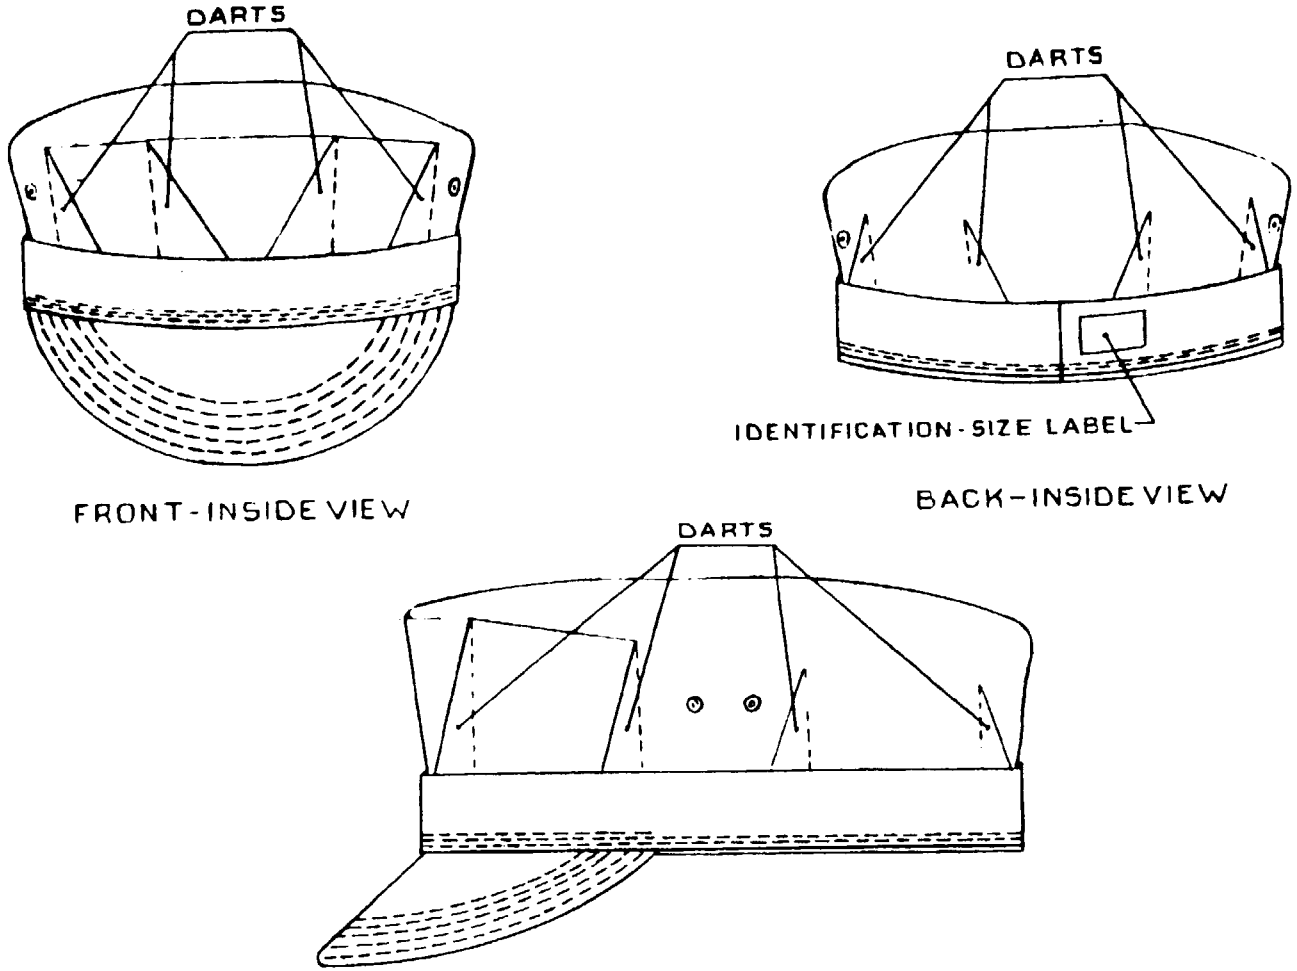


FIGURE 3. CAP, UTILITY; COTTON, SATEEN, GREEN

M.C.S.A.
826 R.G.F.
8 Oct '69

Source: https://assist.dla.mil -- Downloaded: 2026-01-16T11:31Z
Check the source to verify that this is the current version before use.

M.C.S.A.
826:R&E
8 Oct '69

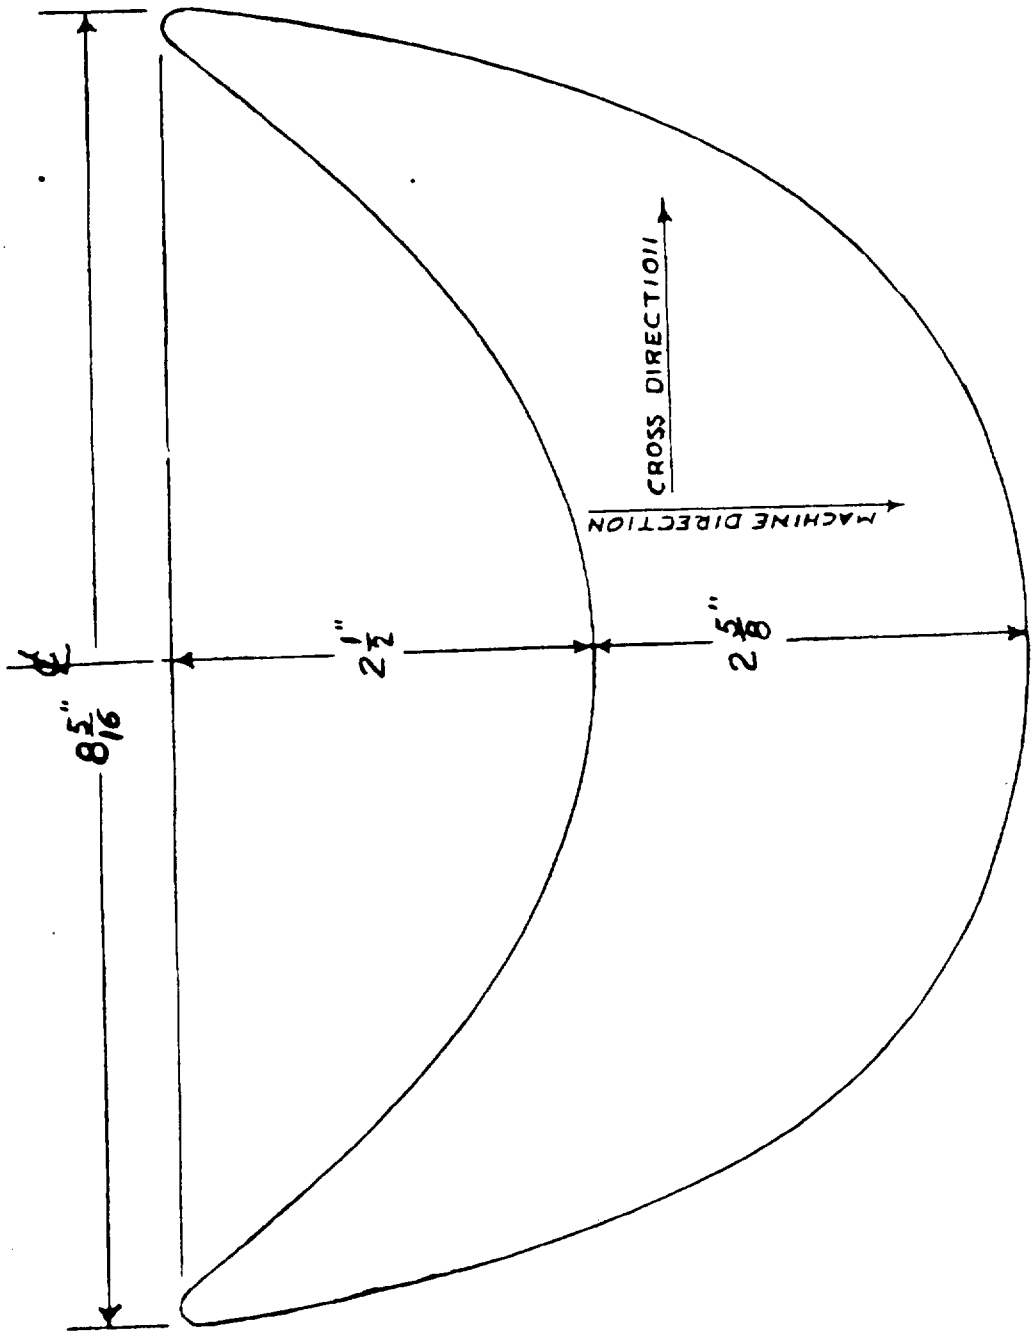


FIGURE 4. CAP, UTILITY; COTTON, SATEEN, GREEN

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-16T11:31Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

Commanding General (Code 826)
Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Pennsylvania 19146

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:31Z
Check the source to verify that this is the current version before use.