INCH-POUND

MIL-DTL-833H
1 May 2019
SUPERSEDING
MIL-B-833G
May 27, 1988

# DETAIL SPECIFICATION

# BELT, TROUSERS, COTTON WEBBING, WITH CLIP

This specification is approved for use by all Departments and Agencies of the Department of Defense (DoD).

## 1. SCOPE

1.1 Scope. This specification covers cotton webbing trouser belts with attached end clips for wear by male and female personnel.

1.2 Classification.

1.2.1 Types. This specification covers the following types of belts and clips.

| | | |
|---|---|---|
| Type I | - | Black 174, 1-1/4 inch wide (gold plated end clip) |
| Type II | - | Khaki 3709, 1-1/4 inch wide (gold plated end clip) |
| Type III | - | DELETED |
| Type IV | - | Blue 1089, 1-1/4 inch wide (nickel silver end clip) |
| Type V | - | White, 1-1/4 inch wide (gold plated end clip) |
| Type VI | - | Black 174, 1-1/4 inch wide (black end clip) |
| Type VII | - | Black 174, 1-1/4 inch wide (nickel silver end clip) |
| Type VIII | - | White, 1-1/4 inch wide (nickel silver end clip) |
| Type IX | - | Blue 1089, 1-1/4 inch wide (black end clip) |
| Type X | - | Black 174, 1 inch wide (nickel silver end clip) |
| Type XI | - | White, 1 inch wide (nickel silver end clip) |
| Type XII | - | Black 174, 1 inch wide (gold plated end clip) |
| Type XIII | - | Khaki 3709, 1 inch wide (gold plated end clip) |
| Type XIV | - | White, 1 inch wide (gold plated end clip) |
| Type XV | - | Blue 1089, 1-1/4 inch wide (chromium plated end clip) |
| Type XVI | - | Blue 1089, 1 inch wide (chromium plated end clip) |
| Type XVII | - | Heritage Walnut 567, 1-1/4 inch wide (antiqued brass end clip) |

Comments, suggestions, or questions on this document should be addressed to: Attn: DLA Troop Support, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Since contact information can change, verify the currency of the address information using Acquisition Streamlining and Standardization Information System (ASSIST) online database https://assist.dla.mil.

AMSC N/A FSC 8440

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:33Z
Check the source to verify that this is the current version before use.

1.2.2 Sizes. The belt will be available in sizes 33, 35, 39, 45 and 49 (see 3.8 for finished item lengths).

## 2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-W-530 - Webbing, Textile, Cotton, General Purpose, Natural or in Colors
MIL-DTL-1963 - Buckles; and Clips, End, Strap (for Belt, Trousers)
MIL-DTL-32075 - Label: For Clothing, Equipage and Tentage (General Use)

(Copies of these documents are available online at https://quicksearch.dla.mil)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation or contract.

THE INSTITUTE OF HERALDRY

TIOH Official Certified Metal Finish Chips - Chip #4

(Samples are available through The Institute of Heraldry, 9325 Gunston Road, Room S-112, Fort Belvoir, VA 22060; contact by email: usarmy.beloir.hqda.mbx.tioh-webmaster@mail.mil or by telephone: 571-515-0346.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:33Z
Check the source to verify that this is the current version before use.

DRAWINGS

US ARMY NATICK RESEARCH, DEVELOPMENT AND ENGINEERING CENTER

2-4-45 - Belt, Trousers, Cotton Webbing, with Clip

(Copies of drawings are available from the U.S. Army Combat Capabilities Development Command Soldier Center, ATTN: FCDD-SCP-WC, 10 General Greene Avenue, Natick, MA 01760-5019.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN SOCIETY FOR QUALITY (ASQ)

ANSI/ASQ Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

(Copies are available online at https://asq.org.)

ASTM INTERNATIONAL

ASTM D3990 – Standard Terminology Relating to Fabric Defects

(Copies are available online at https://www.astm.org.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), samples shall be subjected to first article inspection in accordance with 4.2 and 6.4.

3.2 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.3 Design. Belts shall be constructed in accordance with Drawing 2-4-45. The end-items shall consist of webbing (see 3.4) of the appropriate length for the size specified (see 3.8) and an end clip (see 3.5) of the appropriate size, color and finish (see Table I) for the type(s) and size(s) of belt specified in the contract or purchase order (see 6.2) properly set (see 3.8.1) into one end.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:33Z
Check the source to verify that this is the current version before use.

3.3.1 Figures. Figure 1 is provided for informational purposes only. To the extent of any inconsistencies between the written document and the figure, the written document shall govern.

3.4 Webbing. The webbing shall conform to Type IV of MIL-W-530. The width, class and color of the webbing shall be as specified in Table I for the type(s) of belts specified in the contract or purchase order.

3.5 Clips. The end clips on the belts shall conform to Type III of MIL-DTL-1963. The nominal width of the clips shall match the width of the belt webbing. The class and subclass of clips shall be as specified in Table I for each type of belt indicated in the contract or order.

TABLE I. Finished belt characteristics.

| Belt Type | Webbing | | | End Clip 2/ | | |
|---|---|---|---|---|---|---|
| | Color | Width | Class 1/ | Class | Subclass | Material/finish |
| I | Black 174 | 1-1/4 | 3 | 1 | D | Gold plated, mirror finish |
| II | Khaki 3709 | 1-1/4 | 3 | 1 | D | Gold plated, mirror finish |
| III | DELETED (see 6.8) | | | | | |
| IV | Blue 1089 | 1-1/4 | 3 | 2 | | Nickel silver, satin finish |
| V | White | 1-1/4 | 2 | 1 | D | Gold plated, mirror finish |
| VI | Black 174 | 1-1/4 | 3 | 1 | B | Black enamel finish |
| VII | Black 174 | 1-1/4 | 3 | 2 | | Nickel silver, satin finish |
| VIII | White | 1-1/4 | 2 | 2 | | Nickel silver, satin finish |
| IX | Blue 1089 | 1-1/4 | 3 | 1 | B | Black enamel finish |
| X | Black 174 | 1 | 3 | 2 | | Nickel silver, satin finish |
| XI | White | 1 | 2 | 2 | | Nickel silver, satin finish |
| XII | Black 174 | 1 | 3 | 1 | D | Gold plated, mirror finish |
| XIII | Khaki 3709 | 1 | 3 | 1 | D | Gold plated, mirror finish |
| XIV | White | 1 | 2 | 1 | D | Gold plated, mirror finish |
| XV | Blue 1089 | 1-1/4 | 3 | 1 | C | Chromium plated, mirror finish |
| XVI | Blue 1089 | 1 | 3 | 1 | C | Chromium plated, mirror finish |
| XVII | Heritage Walnut 567 | 1-1/4 | 3 | 3 | B | Red brass, antiqued finish 3/ |

1/ Per MIL-W-530
2/ Per MIL-DTL-1963
3/ Clips for Type XVII belts shall have an antiqued finish to approximate the buffed portions of the Institute of Heraldry Metal Finish Book, Chip #4.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:33Z
Check the source to verify that this is the current version before use.

3.6 Marking. The size of the belt shall be legibly marked in the size characters and in the locations shown in Drawing 2-4-45. The color of the marking medium shall be in contrast to the color of the webbing. The contract or purchase order (see 6.2) may prescribe additional labeling or tagging requirements.

3.7 Labeling.

3.7.1 Identification label. The identification label shall conform to Type VI, Class 1, of MIL-DTL-32075. The label shall be stitched 1/4 inch from the non-clip end of the belt. The stitching shall not cover the printing. The printed label shall be facing the body. The label shall include the applicable National Stock Number (NSN).

3.7.2 Bar code hang tag. Each belt shall have a barcode label/hangtag conforming to Type VIII, Class 17 of MIL-DTL-32075. The bar coding element shall be a 13 digit NSN. There shall be a 12 digit Universal Product Code (UPC) number assigned for all NSNs by the contracting activity. The initials "UPC" must appear beneath the code. The barcode for NSN and UPC type shall be a medium to high density and shall be located so that it is completely visible on the belt when it is rolled and/or packaged as specified and so it causes no damage to the belt or clip.

3.8 Construction and performance. Belts shall be constructed in accordance with Drawing 2-4-45. Finished belts, consisting of webbing and properly attached clip, shall meet the length requirements specified below (±1/8 inch) as well as other characteristics specified in Table I. Figure 1 is a simplified drawing of the belt with clip for information only.

| Marked size (see 6.5) | 33 | 35 | 39 | 45 | 49 |
|---|---|---|---|---|---|
| Finished length (inches) of belt with clip | 36 | 38 | 42 | 48 | 52 |

3.8.1 Setting of clips. A clip (see 3.5) shall be set into one end of each finished belt. Stray threads from the webbing end shall be removed prior to setting the clips. The center of the webbing shall be aligned with the center of the end clip and the webbing shall be inserted to the full depth (+0, -3/16 inch) of the clips. The webbing shall lie flat within the confines of the end clip. When clinched, the prongs shall be fully embedded in the webbing and the edges of the webbing shall be equal distance (±1/32 inch) from and parallel to the edges of the clip. There shall be no scratches, dents or other damage to the clips caused by the clinching process.

3.9 Replacement of defective components. During the manufacturing process, components having material defects or damages that are classified as defects in 4.4.1 shall be removed from production and replaced with non-defective and properly matched components.

3.10 Workmanship. The finished belts shall conform to the quality of product established by this document and the occurrence of defects (see Table II) shall not exceed the acceptance quality levels specified in the contract or purchase order (see 6.2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:33Z
Check the source to verify that this is the current version before use.

## 4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2)
b. Conformance inspection (see 4.3)

4.2 First article inspection. A first article, submitted in accordance with 3.1, shall be inspected, examined for appearance, dimensions, color and end-item defects (Table II). See 6.4 for more information.

4.3 Conformance inspection. Conformance inspection shall include the end-item visual examination of 4.4.1 and dimensional examination of 4.5.1. Sampling for inspection shall be performed in accordance with ANSI/ASQ Z1.4 and with acceptance quality limits as specified in the contract and/or purchase order, except where otherwise indicated (see 6.2). Belts with clips not meeting any requirement of section 3 shall be rejected. Rejected items may be reworked and resubmitted only at the discretion of the government.

4.4 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with all the requirements of referenced documents, unless otherwise excluded, amended, modified or qualified in this specification or applicable procurement documents. (see 6.2).

4.4.1 End item visual examination. The belt with clip shall be examined for the defects listed in Table II. Webbing defects shall be as defined in ASTM D3990. End clip defects that are not self-explanatory are defined in 6.7.

THIS SECTION INTENTIONALLY LEFT BLANK



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:33Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual inspection.

| Examine | Defect | Category | |
|---|---|---|---|
| | | Major | Minor |
| Webbing | Any hole, cut, tear or smash | 101 | |
| | Wrong color for type of belt specified 1/ | 102 | |
| | Width not as specified in Table I for class being examined | 103 | |
| | Broken yarns on the webbing, more than 1/4 inch away from either end | 104 | |
| End clip | Omitted or misplaced | 105 | |
| | Wrong color or finish for type belt specified 2/ | 106 | |
| | Size of clip not as specified | 107 | |
| | Broken or malformed | 108 | |
| | Corroded | 109 | |
| | Improperly set (i.e., prongs not fully embedded in webbing) | | 201 |
| | End of webbing not set full depth in clip (see 3.8.1) | 110 | |
| | Webbing does not lie flat within confines of clip | 111 | |
| | Not centered on webbing (see 3.8.1) | 112 | |
| | Dents, nicks, abrasions, gouges, scrapes or scratches on exposed surfaces or burrs on edges (see 6.7) | 113 | |
| Markings | Omitted, illegible, incorrect, misplaced or not as specified (see 3.6) | 114 | |
| Cleanliness | Blemishes, stains or spots clearly visible from a normal viewing distance (3 feet) that cannot be removed with a clean cloth | 115 | |

1/ Shade matching conducted as a requirement of MIL-W-530.
2/ Finish assessment conducted as part of MIL-DTL-1963.

4.5 Methods of inspection.

4.5.1 Dimensional examination. The end item shall be examined for conformance to the length specified in 3.8.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:33Z
Check the source to verify that this is the current version before use.

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory)

6.1 Intended use. Belts are used by male and female personnel to secure clothing and equipment items and to present a professional appearance. See 6.8 for a listing of current users of each type of belt with clip.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Type(s) and size(s) required (see 1.2.1 and 1.2.2).
c. The specific issue of individual documents referenced (see 2.2 and 2.3).
d. When first article inspection is required (see 3.1, 4.2, and 6.4).
e. Marking (see 3.6).
f. Inspection conditions (see 4.4).
g. Conformance inspection acceptance quality limits (AQL) (see 4.3)
h. Packaging (see 5.1).

6.3 Drawings. For access to drawings, address the contracting or ordering activity.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the First Article.

6.5 Determination of belt size. The belt size is developed by adding three (3) inches to the objective waist size to allow for proper military appearance. Users are expected to purchase belts equal to or greater than their waist size and trim the webbing (if needed) to achieve appropriate belt length.

6.6 Subject term (key word) listing.
Brass
Gold plating
Nickel plating

6.7 Definitions of defects applicable to clips.

| | | |
|---|---|---|
| Abrasion | - | Area of damage characterized by shallow scratches or scrapes |
| Burr | - | Protruding, ragged edge on metal, generally from drilling, shearing, punching, or engraving |
| Dent | - | Area of localized damage consisting of a hollow or depression within the surface |
| Gouge | - | Damage where material has been moved through hard contact with a sharp object |
| Nick | - | Area of localized damage consisting of a small cut or notch at the edge of the material |



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:33Z
Check the source to verify that this is the current version before use.

Scrape - Damage on the surface from contact with a rough surface, deeper than an abrasion
Scratch - Linear damage on the surface from a sharp object, deeper than an abrasion

6.8 Current list of users. The listing below includes the Services currently identified as users for each of the types of belts specified. This table is for information only, and does not preclude users other than those identified.


| Type | Army | Navy | Air Force | Marine Corps |
|---|---|---|---|---|
| I | | X | | |
| II | | X 1/ | | X |
| III | | 1/ | | |
| IV | | | X | |
| V | | X | | |
| VI | X | | | |
| VII | | X | | |
| VIII | | X | | |
| IX | | | X | |
| X | | X | | |
| XI | | X | | |
| XII | | X | | |
| XIII | | X | | |
| XIV | | X | | |
| XV | | | X | |
| XVI | | | X | |
| XVII | X | | | |
| XVIII | - | | | X |
| IX | - | | | X |
| XX | - | | | X |
| XXI | - | | | X |

1/ Type III was deleted in MIL-DTL-833H due to changes in the clip making Type II and Type III the same item. The indicator for the Navy has been moved from Type III to Type II to accommodate the change.

6.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:33Z
Check the source to verify that this is the current version before use.

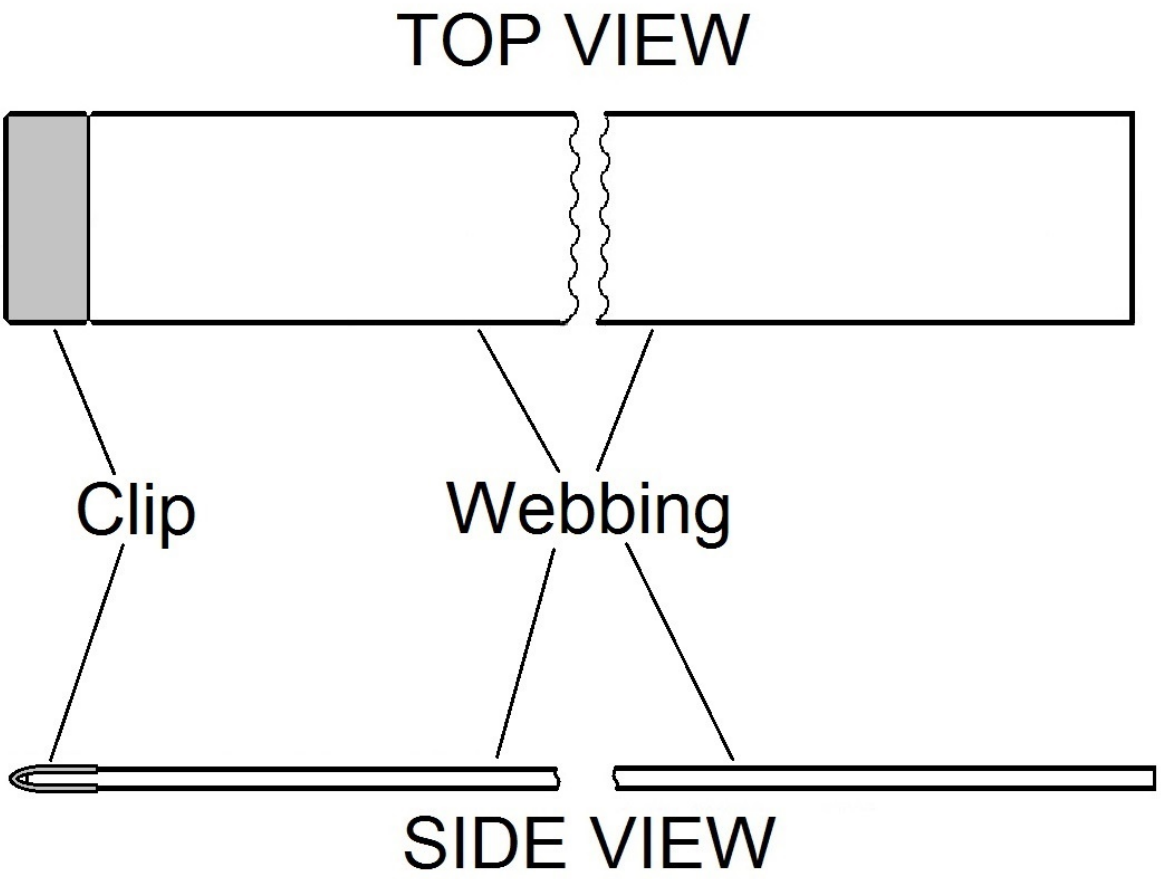


NOTE: For information only. Belts shall be made in accordance with Drawing 2-4-45. Webbing color and width; and clip color, finish and width shall be as applicable to type specified.

FIGURE 1. Belt with clip.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:33Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodian
Army – GL
Navy – NU
Air Force – 11

Review Activities
Army – IH
Navy – CG, MC

PREPARING ACTIVITY

DLA - CT

Project: 8440-2019-001

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at http://quicksearch.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:33Z
Check the source to verify that this is the current version before use.