INCH-POUND

MIL-R-779E
21 November 1990
SUPERSEDING
MIL-R-779D
2 JULY 1981

MILITARY SPECIFICATION

REFLECTORS, LIGHT; WITH HOLDER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers light reflectors, with holders, for indoor and outdoor installations.

1.2 Classification. Reflectors shall be of the following types, styles, and classes as specified (see 6.2):

Type I - Cone
  Style 1 - Deep cone
  Style 2 - Flat cone, short neck
  Style 3 - Flat cone, long neck
Type II - Dome
  Style 1 - Deep dome
  Style 2 - Shallow dome

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6210

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

Type III - Bowl
Style 1 - Deep bowl
Style 2 - Shallow bowl
Type IV - Angle
Style 1 - Symmetrical, clamp type
Style 2 - Symmetrical, pendant type
Style 3 - Elliptical
Type V - Parabola
Type VI - Half (pear)
Type VII - Channel
Class 1 - Steel body
Class 2 - Aluminum body

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-V-173	-	Varnish, Moisture- and Fungus-Resistant.
MIL-A-8625	-	Anodic Coatings, for Aluminum and Aluminum Alloys.
MIL-E-17555	-	Electronic and Electrical Equipment, Accessories, and Repair Parts; Packaging of.

STANDARDS

FEDERAL

FED-STD-595	-	Colors.

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-130	-	Identification Marking of U.S. Military Property.
MIL-STD-889	-	Dissimilar Metals.
MIL-STD-1190	-	Minimum Guidelines for Level C Preservation, Packing, and Marking.

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:28Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

2.2 Other publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 424	-	Steel Sheets for Porcelain Enameling.
B 209	-	Aluminum and Aluminum-Alloy Sheet and Plate.
C 286	-	Definition of Terms Relating to Porcelain Enamel and Ceramic-Metal Systems.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street,Philadelphia, PA 19103.)

RLM STANDARDS INSTITUTE, INC.

RLM Standard No. 1	-	Standard Specification for RLM Dome Reflectors.
RLM Standard No. 100	-	Inspection and Testing Procedures.

(Application for copies should be addressed to RLM Standards Institute, Inc., Box 754, Meriden, CT 06450).

SOCIETY OF AUTOMOTIVE ENGINEERS, INC. (SAE)

J964	-	Test Procedure for Determining Reflectivity of Rear View Mirrors.

(Application for copies should be addressed to the Society of Automotive Engineers, Incorporated, 400 Commonwealth Drive, Warrendale, PA 15096.)

SOUTH COAST AIR QUALITY MANAGEMENT CONTROL DISTRICT (SCAQMD)

Rule 442	-	Usage of Solvents.

(Application for copies should be addressed to the South Coast Air Quality Management Control District, 9150 East Flair Drive, El Monte, CA 91731.)

UNDERWRITERS LABORATORIES, INC. (UL)

UL 496 Edison-Base Lampholders

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:28Z
Check the source to verify that this is the currentversion before use.

(Application for copies should be addressed to the Underwriters Laboratories, Inc., Publications Stock, 333 Pfingsten Road, Northbrook, IL 60062.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. Reflectors shall be similar to figures 1 through 13 (see 6.4) and as specified herein.

3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.3 Material. Material shall be as specified herein. Material not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Material deterioration prevention and control. The reflectors shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the reflectors may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with components and subcomponents, and shall make information available upon request to the contracting officer or designated representative.

3.3.2 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces, and parts incorporated in the reflectors may be newly fabricated from recovered materials to the maximum extent practicable, provided the reflectors produced meet all other

Source: https://assist.dla.mil -- Downloaded: 20261O-16T11:28Z
Check the source to verify that this is the currentversion before use.

requirements of this specification. Used, rebuilt or remanufactured components, pieces, and parts shall not be incorporated in the reflectors.

3.4 Steel body reflectors. Steel reflectors shall be made of enameled steel sheets conforming to ASTM A 424, type and composition optional, drawing quality. The lower section of the reflectors shall have rolled edges. External surfaces shall be free of burrs, sharp edges, and corners, except when sharp edges and corners are required or where they are not detrimental to safety. The steel, after forming, shall be not less than 0.019 inch (0.48 mm) thick for reflectors less than 18 inches (45.72 cm) in diameter; 0.024 inch (0.61 mm) thick for reflectors 18 to 22 inches (45.72 to 55.88 cm) in diameter; and 0.032 inch (0.81 mm) thick for the 21-inch (53.34 cm) channel reflector. The reflectors shall be completely covered by fused porcelain enamel having a glazed surface leaving no exposed metal. Total thickness of the porcelain enamel on any surface shall be not more than 0.025 inch (0.63 mm). Unless otherwise specified (see 6.2), the outside of the reflectors shall match color no. 14087 of FED-STD-595. Enameled surfaces shall be free from defects such as tears, star marks, crazing, blisters, black specks, hairlines, chipping, pinholes, and other irregularities as defined in ASTM C 286. The inner or reflecting surface shall be white and shall have a reflection factor of not less than 80 percent, measured in accordance with SAE J964.

3.5 Aluminum Body Reflectors. Aluminum reflectors shall be made of aluminum sheets conforming to ASTM B 209, alloy 1100, 5005, or 5052, 0-temper. The lower section of the reflector shall have rolled edges. External surfaces shall be free of burrs, sharp edges, and corners, except when sharp edges and corners are required or where they are not detrimental to safety. The aluminum, after forming, shall be not less than 0.036 inch (0.91 mm) thick for reflectors up to 18 inches (45.72 cm) in diameter and 0.050 inch (1.27 mm) thick for the 21-inch (53.34 cm) channel reflector. The reflector shall be anodized in accordance with MIL-A-8625, type II, to a minimum of 0.0004 inch (0.01 mm) for aluminum castings and 0.007 inch (0.02 mm) for aluminum wrought alloys. The reflector and shall have a reflection factor of not less than 70 percent, measured in accordance with SAE J964.

3.6 Lampholders. The lampholder shall be rigid or shock absorbing type, as specified (see 6.2), and shall conform to UL 496.

3.7 Type I, cone reflectors. Type I, cone reflectors shall be of the following styles and sizes.

3.7.1 Style 1, deep cone. Style 1, deep cone reflectors shall be similar to figure 1. As specified (see 6.2), reflectors shall be 8, 10, 12, or 14 inches in diameter ±0.5 inch (1.27 cm) with the reflecting surface at an angle of 45 degrees with the centerline of the cone. Reflectors shall be furnished with a clamp-type reflector holder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

3.7.2 Style 2, flat cone, short neck. Style 2, flat cone, short neck reflectors shall be similar to figure 2. Unless otherwise specified (see 6.2), the reflectors shall be 14 inches (35.56 cm) in diameter, ±0.5 inch (1.27 cm), with the reflecting surface at an angle of 80 degrees with the centerline of the cone. Reflectors shall be furnished with a clamp-type reflector holder.

3.7.3 Style 3, flat cone, long neck. Style 3, flat cone, long neck reflectors shall be similar to figure 3. As specified (see 6.2), reflectors shall be 14, 16, or 18 inches (35.56, 40.64, or 45.72 cm) in diameter, ±0.5 inch (1.27 cm), with the reflecting surface at an angle of 80 degrees with the centerline of the cone. Reflectors shall be furnished with a pendant-type hood containing a medium base lamp receptacle. The hood shall be tapped for mounting on 0.5-inch (1.27-cm) conduit.

3.8 Type II, dome reflectors. Type II, dome reflectors shall be of the following styles and sizes.

3.8.1 Style 1, deep dome. Style 1, deep dome reflectors shall be similar to figure 4. Unless otherwise specified (see 6.2), reflectors shall be 18 inches (45.72 cm) in diameter, ±0.5 inch (1.27 cm). Reflectors shall be furnished with a pendant-type hood containing a mogul base lamp receptacle. The hood shall be tapped for mounting on 0.5-inch (1.27-cm) conduit.

3.8.2 Style 2, shallow dome. Style 2, shallow dome reflectors shall be similar to figure 5. As specified (see 6.2), reflectors shall be 12, 14, or 16 inches (30.48, 35.56 or 40.64 cm) in diameter, ±0.5 inch (1.27 cm). Reflectors shall be furnished with a pendant-type hood containing a mogul base lamp receptacle. The hood shall be tapped for mounting on 0.5-inch (1.27-cm) conduit.

3.9 Type III, bowl reflectors. Type III, bowl reflectors shall be of the following styles and sizes.

3.9.1 Style 1, deep bowl. Style 1, deep bowl reflectors shall be similar to figure 6. Unless otherwise specified (see 6.2),reflectors shall be 16 inches (4.06 cm) in diameter, ±0.5 inch (1.27 cm). Reflectors shall be furnished with a pendant-type hood containing a mogul base lamp receptacle. The hood shall be tapped for mounting on 0.5-inch (1.27-cm) conduit.

3.9.2 Style 2, shallow bowl. Style 2, shallow bowl reflectors shall be similar to figure 7. As specified (see 6.2), reflectors shall be 10, 12, or 14 inches (25.40, 30.48, or 35.56 cm) in diameter, ±0.5 inch (1.27 cm). Reflectors shall be furnished with a clamp-type reflector holder.

3.10 Type IV, angle reflectors. Type IV, angle reflectors, shall be of the following styles and sizes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

3.10.1 Style 1, symmetrical angle. Style 1, symmetrical angle reflectors shall be similar to figure 8. As specified (see 6.2), reflectors shall be 8 or 10 inches (20.32 or 25.40 cm) in diameter, ±0.5 inch (1.27 cm). Reflectors shall be furnished with a clamp-type reflector holder.

3.10.2 Style 2, symmetrical angle. Style 2, symmetrical angle reflectors shall be similar to figure 9. As specified (see 6.2), reflectors shall be 12, 14, or 16 inches (30.48, 35.56, or 40.64 cm) in diameter, ±0.5 inch (1.27 cm). Reflectors shall be furnished with a pendant-type hood containing a mogul base lamp receptacle.

3.10.3 Style 3, elliptical angle. Style 3, elliptical angle reflectors shall be similar to figure 10. As specified (see 6.2), reflectors shall be 12.75, 16.25 or 21.875 inches (32.385, 41.275 or 55.56 cm) in diameter, ±0.5 inch (1.27 cm). Reflector shall be furnished with a pendant-type hood containing a mogul base lamp receptacle. The hood shall be tapped for mounting on 0.5-inch (1.27-cm) conduit.

3.11 Type V, parabola reflector. Type V, parabola reflectors shall be similar to figure 11. Unless otherwise specified (see 6.2), reflectors shall be 6.5 (16.51 cm) inches in diameter, ±0.5 inch (1.27 cm). The neck of the reflector holder ring shall be secured to the shell of a medium-base lamp receptacle in such a manner as to permit the reflector to be rotated.

3.12 Type VI, half (pear) reflector. Type VI, half (pear) reflectors shall be similar to figure 12. Unless otherwise specified (see 6.2), reflectors shall be 5.5 inches (13.97 cm) long by 2.125 inches (5.4 cm) high and 3.25 inches (8.26 cm) wide, ±0.5 inch (1.27 cm). The neck of the reflector shall fit into and be retained by a reflector holder ring secured to the shell of a medium-base lamp receptacle in such a manner as to permit the reflector to be rotated.

3.13 Type VII, channel reflector. Type VII, channel reflectors shall be similar to figure 13. Unless otherwise specified (see 6.2), reflectors shall be 21 inches (53.34 cm) long, 16 inches (40.64 cm) high and 7 inches (17.78 cm) wide, ±0.5 inch (1.27 cm). The reflector shall be furnished with a pendant-type hood containing a medium base lamp receptacle. The hood shall be tapped for mounting on 0.5-inch (1.27-cm) conduit.

3.14 Reflector holder, clamp type. Reflector holders shall be corrosion-resisting metal or metal treated to resist corrosion. Clamp-type holders shall be formed as part of the reflector or shall be permanently attached to the neck of the reflector by soldering, welding, riveting, or swaging. The reflector attachment ring shall be adjustable so as to clamp around the reflector holder grooves on the shell of medium-base brass shell, porcelain, and weatherproof lampholders.

3.15 Fungus and moisture resistance. The electrical circuitry, including all components and connections, except as specified below, shall be protected

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

from the effects of fungus growth and moisture by an overall treatment with varnish conforming to MIL-V-173, composition I or II, as applicable (see 3.15.1), with 1 percent copper 8-quinolinolate (by weight) based on the nonvolatile content of the varnish.

a. Components or circuit elements that are inherently fungus and moisture resistant or which are hermetically sealed need not be treated.
b. Components or circuit elements whose functions will be adversely affected by the varnish coating shall not be treated.

When used, the varnish shall be applied by spray, brush, or a combination of both to give a dry-film thickness of not less than 1 mil to component or element surfaces previously cleaned and prepared so that the surfaces are free from all foreign matter which would interfere with the adherence or function of the varnish.

3.15.1 Composition. Composition II shall be used only in the case when local air pollution regulations governing the application of varnish precludes the use of composition I. When composition II is used, the contractor shall provide evidence to the Government that the use of composition II is required, and shall certify that the composition II material complies with Rule 442, South Coast Air Quality Management Control District.

3.16 Identification marking. Identification marking shall be in accordance with MIL-STD-130.

3.17 Workmanship. The reflectors shall conform to the finish and workmanship requirements of RLM Standard No.1. Reflectors not covered by individual RLM Standards (figures 1, 7, 10, 11, 12 and 13) shall conform to the inspection and testing procedures of RLM Standard No. 100. Workmanship shall be equal to the quality generally accepted as good commercial practice in industry. The reflectors shall be free of all burrs, fins, sharp projections, surface roughness, or any other imperfection that may impair their durability and serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. The contractor is responsible for ensuring that components and materials used are manufactured, examined and tested in accordance with referenced specifications and standards, as applicable.

4.1.3 Acceptability criteria. Reflectors which conform to all requirements in section 3 and 5 of this specification and pass all applicable examinations and tests in section 4 of this specification will be considered acceptable by the Government.

4.2 Classification of inspection. Inspection shall be classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 First article examination. The first article reflector shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 First article tests. The first article reflector shall be tested as specified in 4.5.2. Failure of any test shall because for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105, inspection level II, table I and table IIa.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.3 Test. Reflectors selected in accordance with 4.4.1 shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

4.5 Inspection procedure.

4.5.1 Examination. The reflectors shall be examined as specified herein for the following defects.

Major

101. Reflectors not in accordance with RLM Standard No. 1 (see 3.1).
102. Parts or components missing, damaged or do not function (see 3.1).
103. Assembly incomplete or not correct (see 3.1).
104. Material not as specified (see 3.3).
105. Materials not resistant to corrosion and deterioration, or treated to be resistant to corrosion and deterioration for the applicable storage and operating environments (see 3.3.1).
106. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other (see 3.3.1.1).
107. Contractor does not have documentation available for identification of material, material finishes, or treatment (see 3.3.1.2).
108. Used, rebuilt, or remanufactured components, pieces, or parts incorporated in the reflectors (see 3.3.2).
109. Reflector body not as specified (see 3.4 and 3.5).
110. Lampholders not as specified (see 3.6).
111. Type or style not as specified (see 3.7 through 3.13).
112. Reflector holder not as specified (see 3.14).
113. Fungus and moisture resistance not as specified (see 3.15).
114. Composition not as specified (see 3.15.1).
115. Workmanship not as specified (see 3.17).

Minor

201. Identification markings not as specified (see 3.16).

4.5.2 Reflective efficiency test. The reflective efficiency shall be determined in accordance with SAE J964. Failure to conform to 3.4 or 3.5 shall constitute failure of this test.

4.6 Inspection of packaging. The preservation, packing, and marking for level A or B shall be examined and tested in accordance with the quality assurance provisions of MIL-E-17555. The preservation, packing, and marking for commercial shall be examined to determine compliance with MIL-STD-1190. Any one defect in the preservation, packing, or marking shall be cause for rejection.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Reflectors shall be preserved in accordance with the level A preservation and packaging requirements of MIL-E-17555.

5.1.2 Commercial. Reflectors shall be preserved in accordance with MIL-STD-1190.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A. Reflectors, preserved as specified in 5.1, shall be packed in accordance with level A packing requirements of MIL-E-17555, except fiberboard containers shall not be used for military activities.

5.2.2 Level B. Reflectors, preserved as specified in 5.1, shall be packed in accordance with the level B packing requirements of MIL-E-17555, except fiberboard containers shall be weather resistant for military activities.

5.2.3 Commercial. Reflectors, preserved as specified in 5.1,shall be packed in accordance with MIL-STD-1190.

5.3 Marking.

5.3.1 Level A and B. Marking shall be in accordance with MIL-STD-129.

5.3.2 Commercial. Commercial marking shall be in accordance with MIL-STD-1190. The cube and gross weight shall be marked on each shipping container.

6. NOTES

6.1 Intended use. Reflectors with reflector holders are intended for use with incandescent drop lights, side lights, wall lights, and platform lights.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1, and 2.2)
c. Type, style, and class of reflector required (see 1.2).
d. When a first article model is not required (see 3.2).
e. Color required if other than specified (see 3.4).
f. Lampholder type required (see 3.6).
g. Size of reflector required (see 3.7.1, 3.7.3, 3.8.2, 3.9.2, 3.10.1, 3.10.2, 3.10.3).

Source: https://assist.dla.mil -- Downloaded: 20260-16T11:28Z
Check the source to verify that this is the current version before use.

h. Size of reflector required if other than as specified (see 3.7.2, 3.8.1, 3.9.1, 3.11, 3.12, 3.13).
i. Level of preservation and packing required (see 5.1 and 5.2).

6.3 First article. When a first article inspection is required, the item(s) should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Information figures. Figures 1 through 13 show types of reflectors which have been found acceptable; however, the figures are included for illustration only and are not intended to preclude the furnishing of other reflectors which conform to this specification.

6.5 Subject term (key word) listing.

Angle
Bowl
Channel
Cone
Dome
Elliptical
Holder, Light Reflector
Parabola
Pear
Reflector

6.6 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


Custodians:
Army - ME
Navy - MC


User activity:
Navy - MC

Preparing activity:
Army - ME

Project 6210-1007

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:28Z
Check the source to verify that this is the currentversion before use.

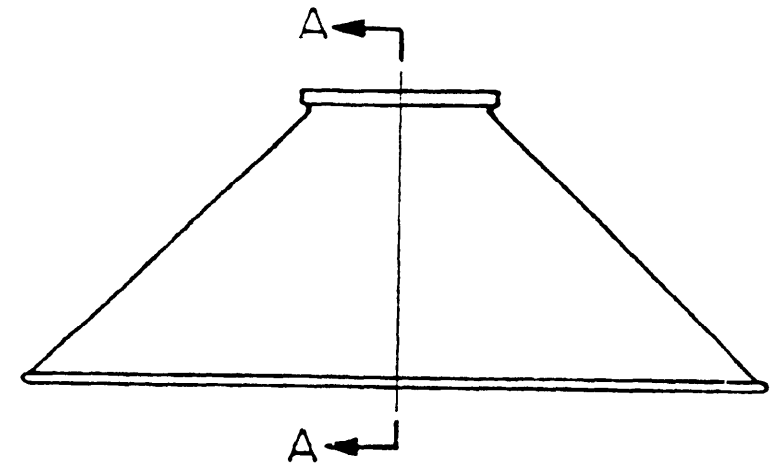


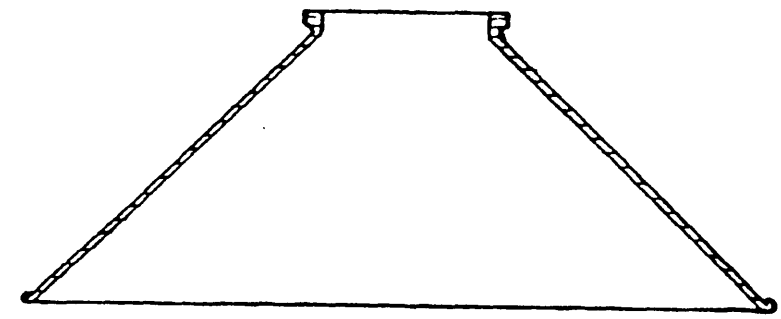

SECTION A A

FIGURE 1. Type I, style 1, deep cone reflector. CX-1092A

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

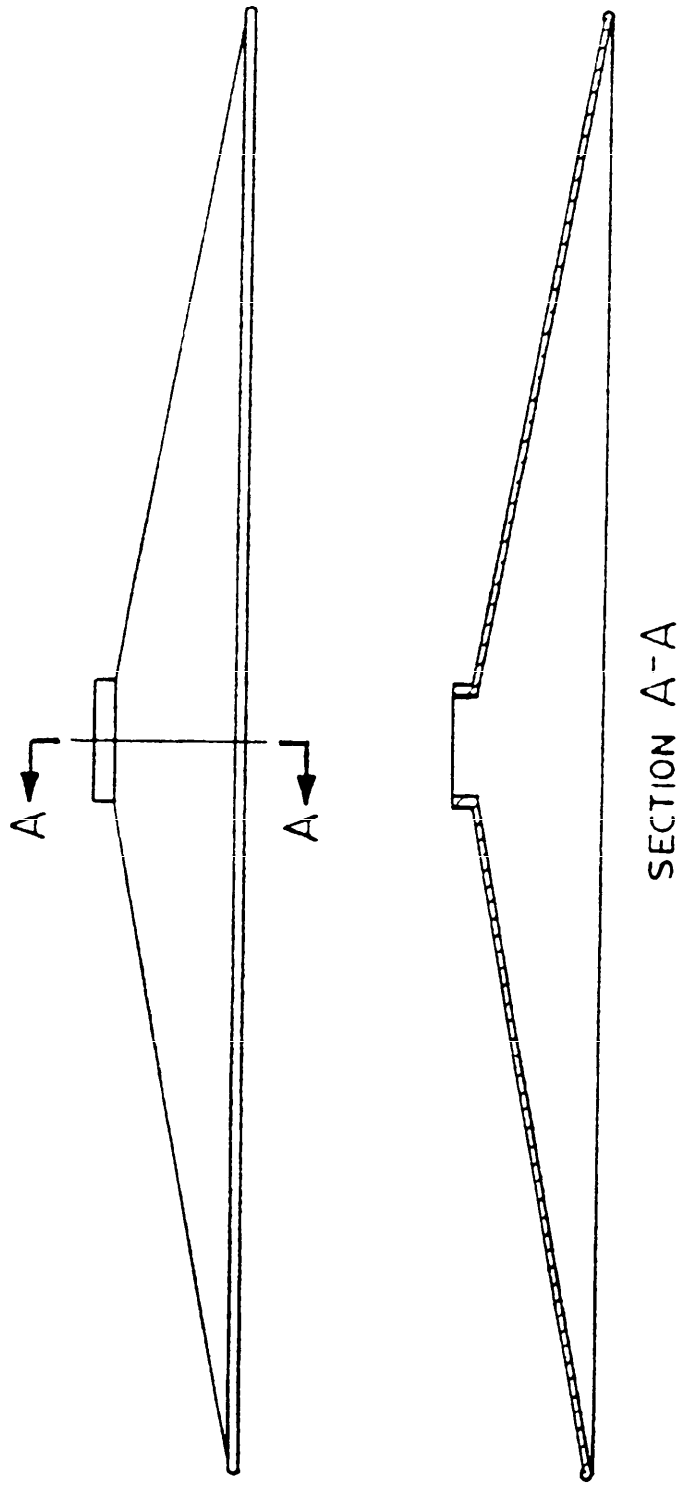

CX-1093A

FIGURE 2. Type I, style 2, flat cone, short neck reflector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.



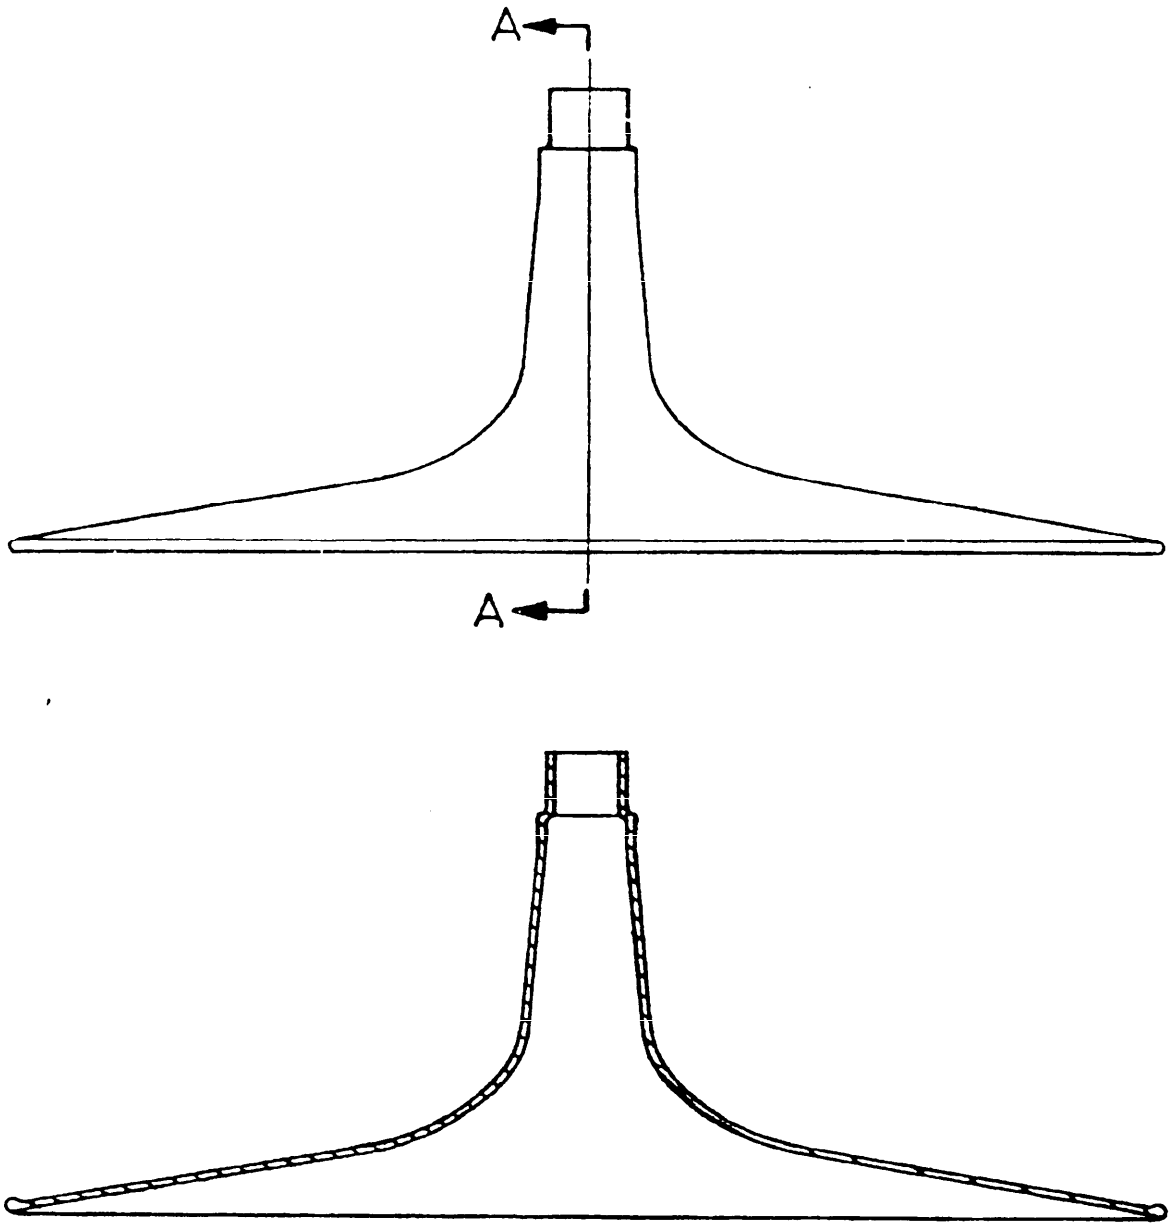


FIGURE 3. Type I, style 3, flat cone, long neck reflector. X-2045A

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:28Z
Check the source to verify that this is the current version before use.

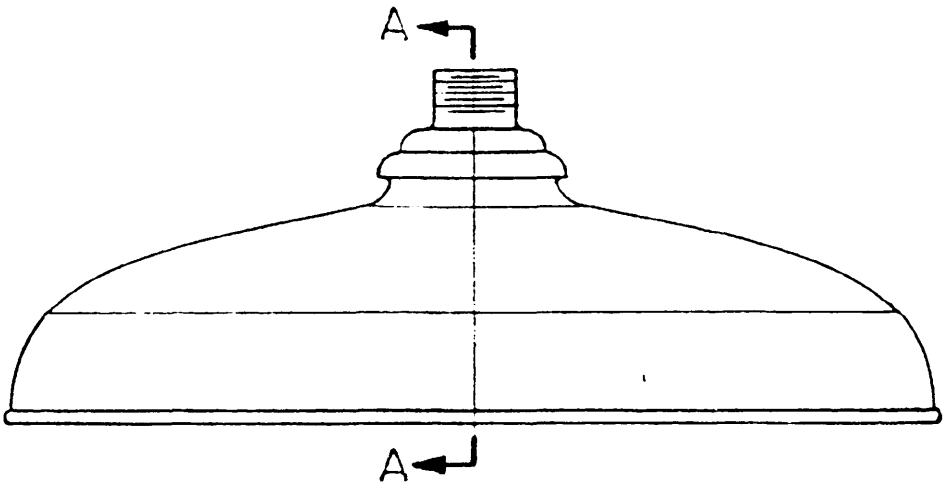

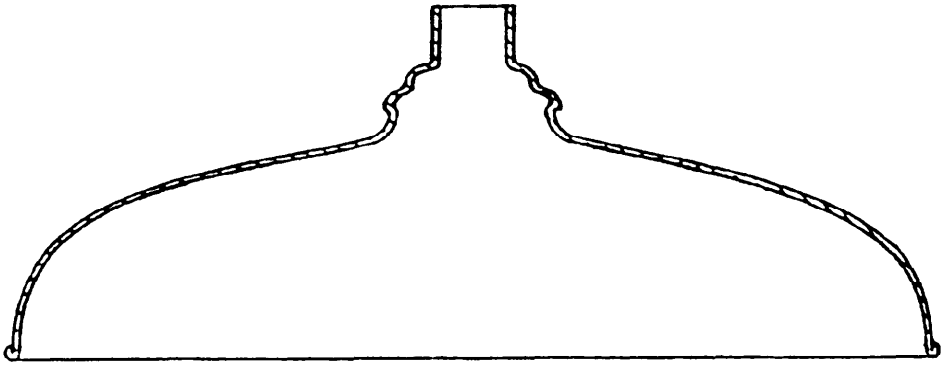

SECTION A-A

FIGURE 4. Type II, style 1, deep dome reflector. CX-1094A

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

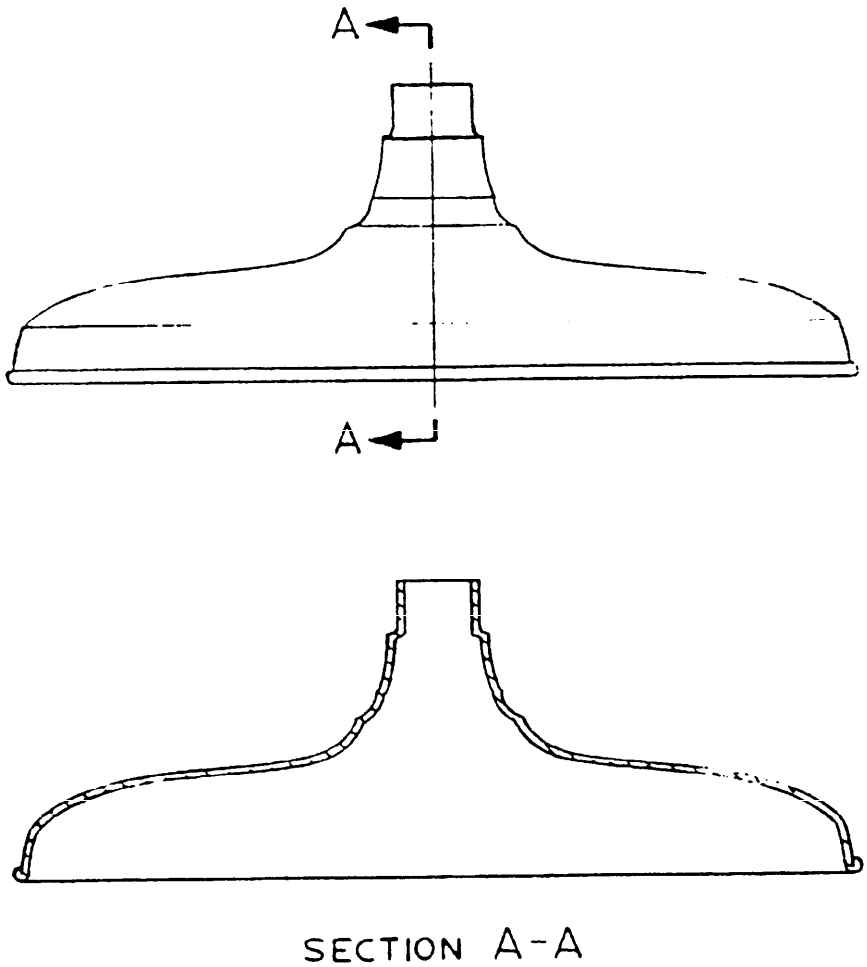


FIGURE 5. Type II, style 2, shallow dome reflector. CX-2046

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

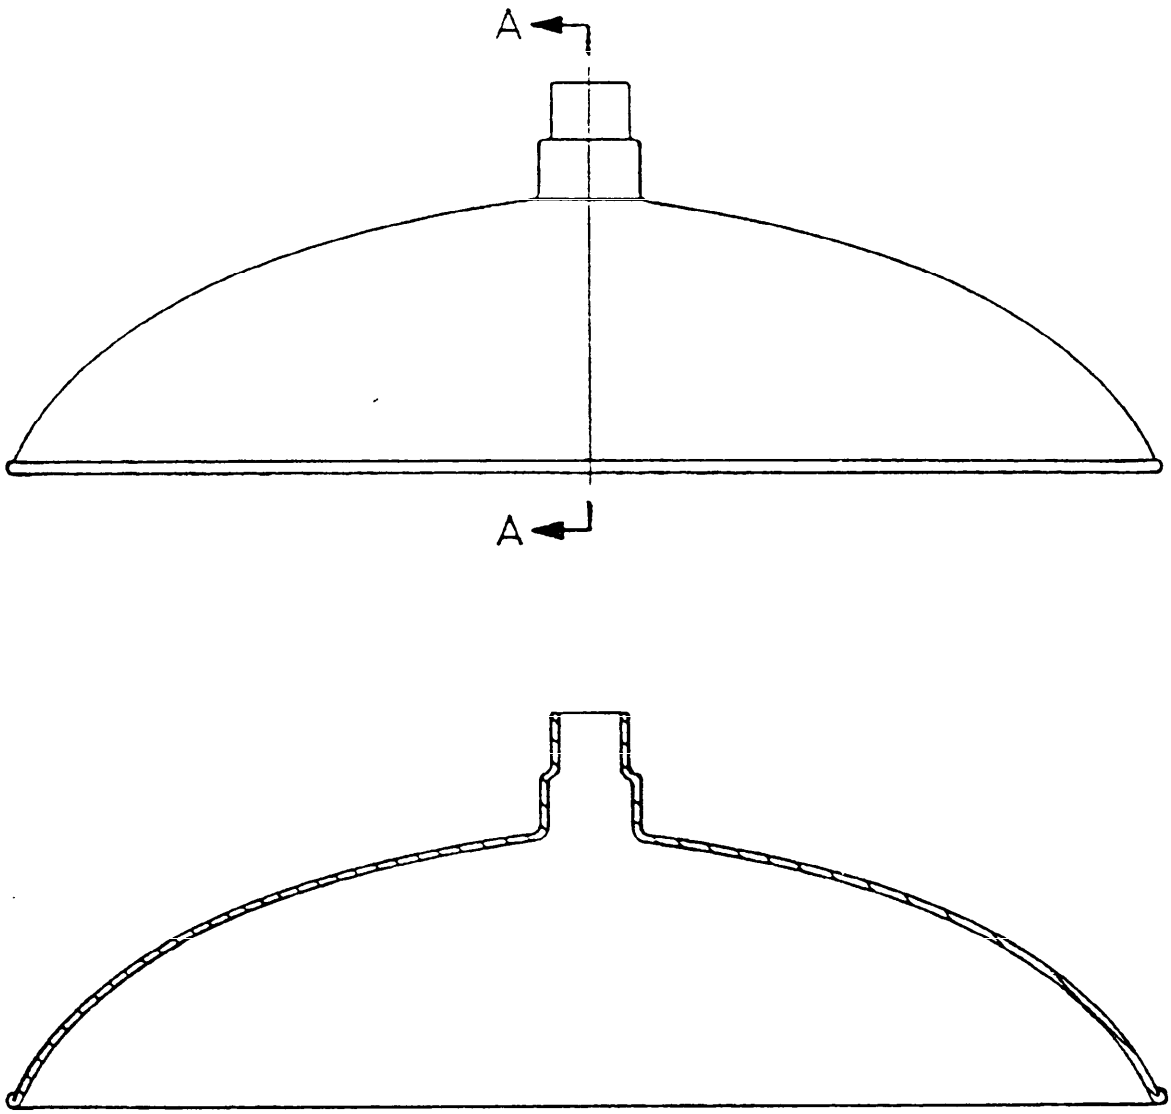


FIGURE 6. Type III, style 1, deep bowl reflector. CX-2047

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

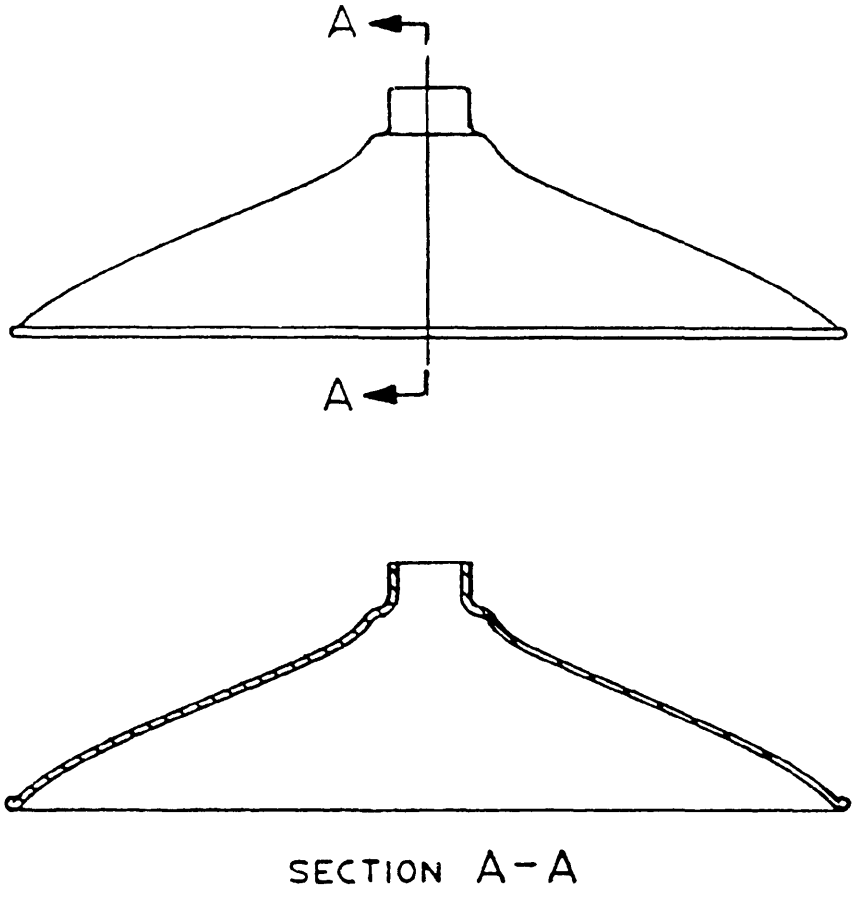


FIGURE 7. Type III, style 2, shallow bowl reflector. CX-2048

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

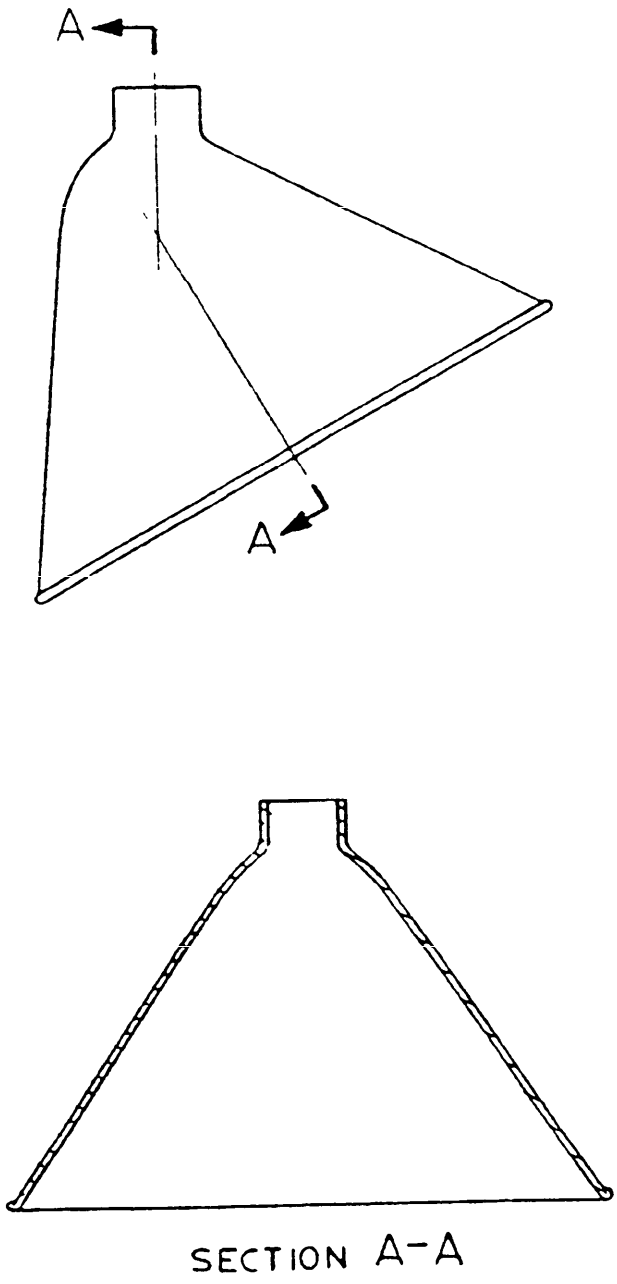


FIGURE 8. Type IV, style 1, symmetrical angle reflector. CX-2049

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.


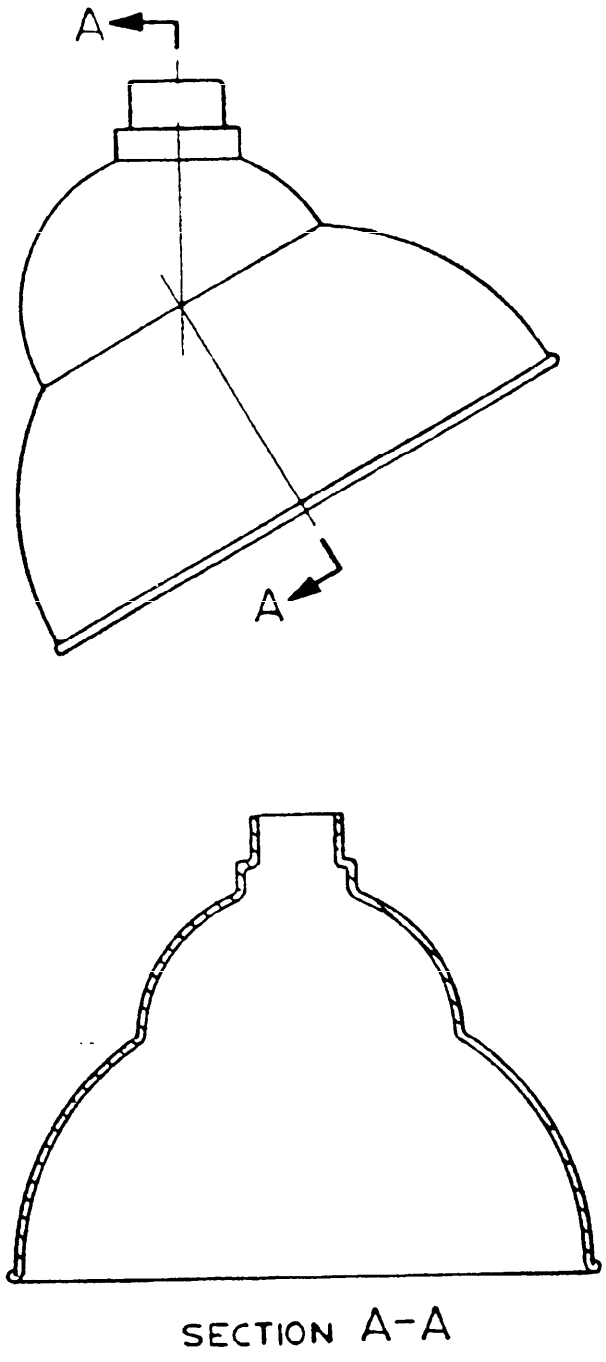


FIGURE 9. Type IV, style 2, symmetrical angle reflector. CX-2050

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

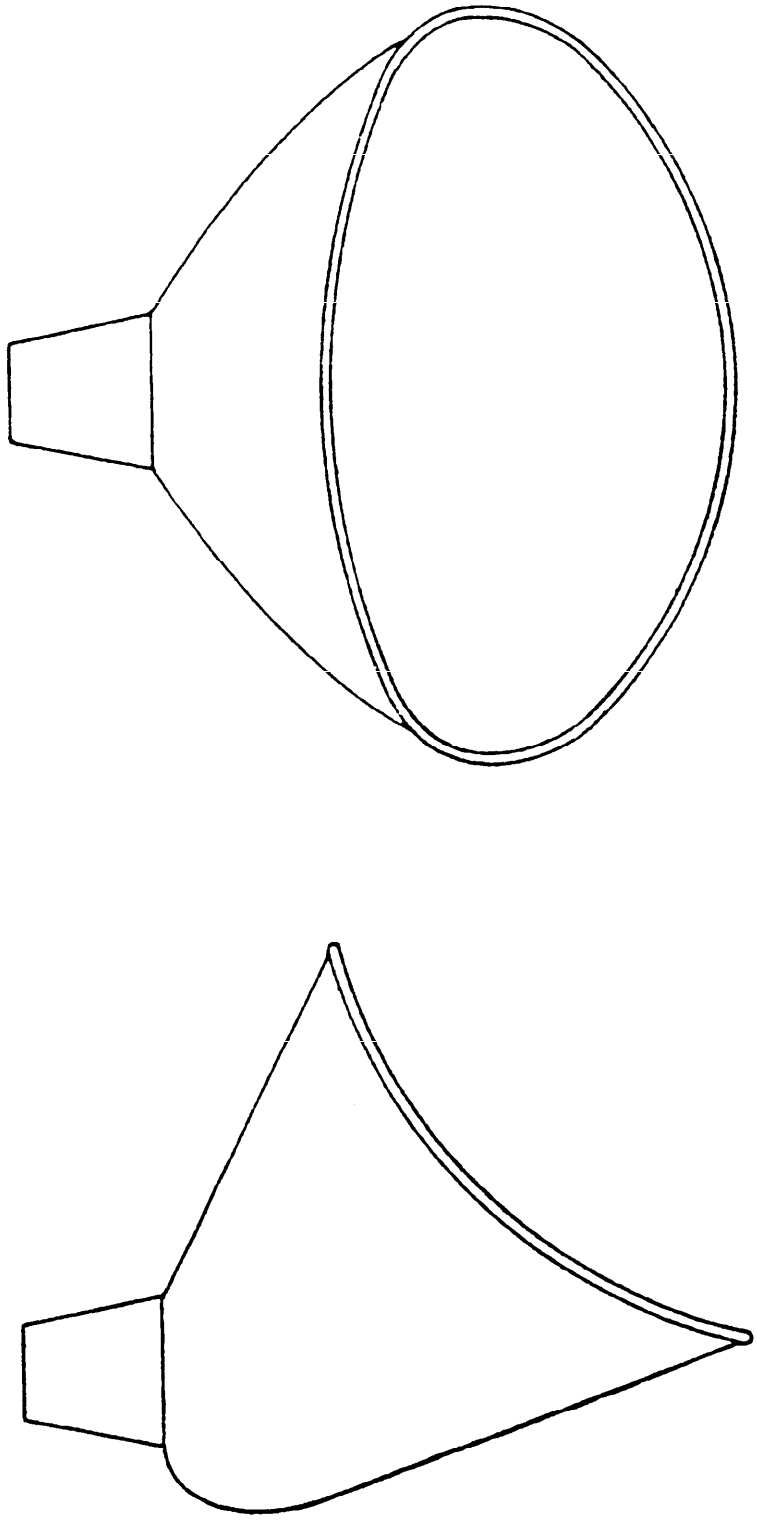

CX-2051

FIGURE 10. Type IV, style 3, elliptical angle reflector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

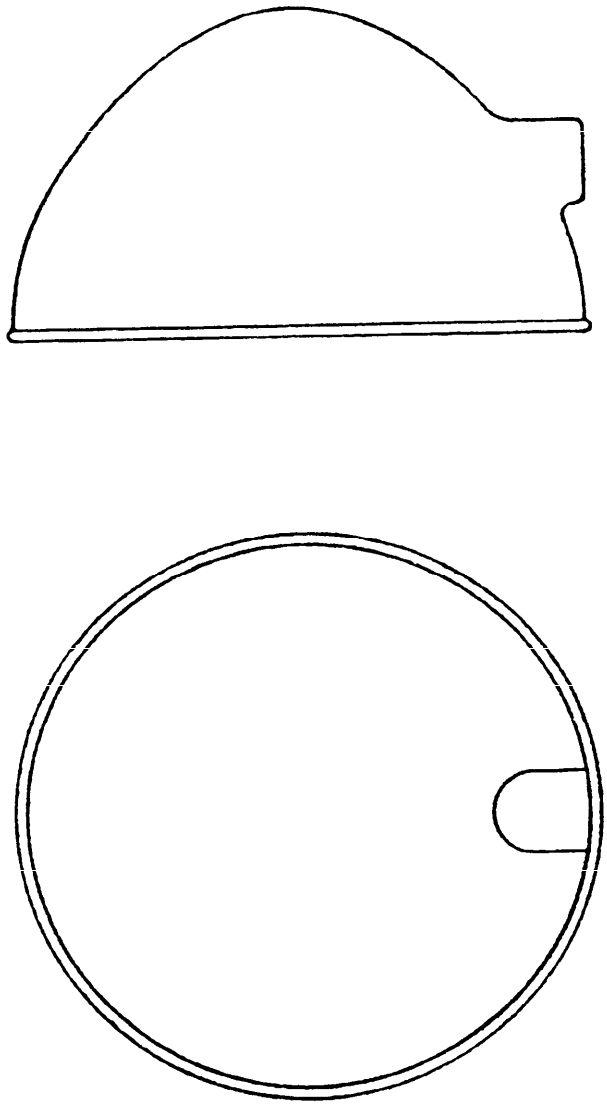


FIGURE 11. Type V, parabola reflector. CX-2052

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

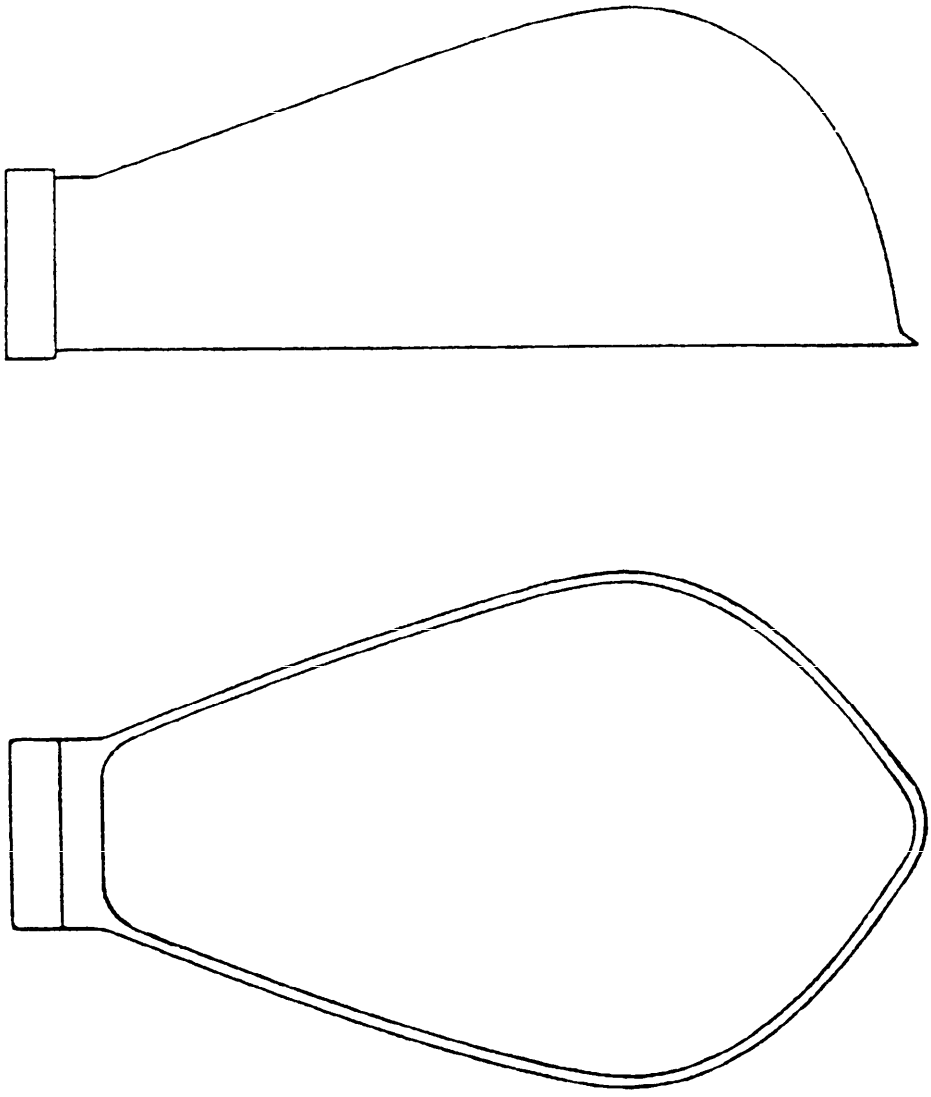


FIGURE 12. Type VI, half (pear) reflector. CX-2053

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

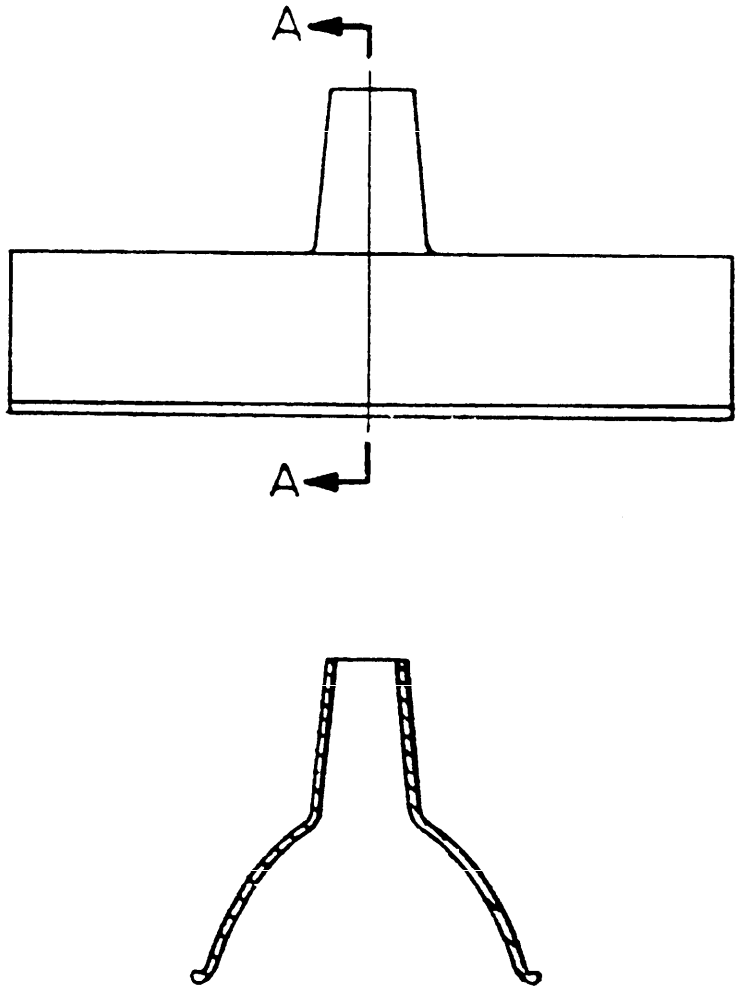


FIGURE 13. Type VII, channel reflector. X-2054A

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:28Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-R-779E	90/11/21

3. DOCUMENT TITLE

Reflectors, Light; with Holder

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)
	e. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial (703) 664-5717	(2) AUTOVON 354-5717
c. ADDRESS (Include Zip Code) US Army Belvoir RDE Center ATTN: STRBE-TSE Ft. Belvoir, VA 22060-5606	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-04-10 14:38:37
Check the source to verify that this is the current version before use.