

MILITARY SPECIFICATION SHEET


CONNECTOR, PRINTED CIRCUIT SUB-ASSEMBLY AND ACCESSORIES PLUG, STRAIGHT-THRU, DOUBLE ROW, FOR STANDARD PRINTED WIRING BOARDS (1/16", 3/32", 1/8" THICK) (.100 SPACING). CONNECTORS ARE 50, 60, 80, 100, 120 CONTACT POSITIONS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification sheet and the latest issue of MIL-C-55302.

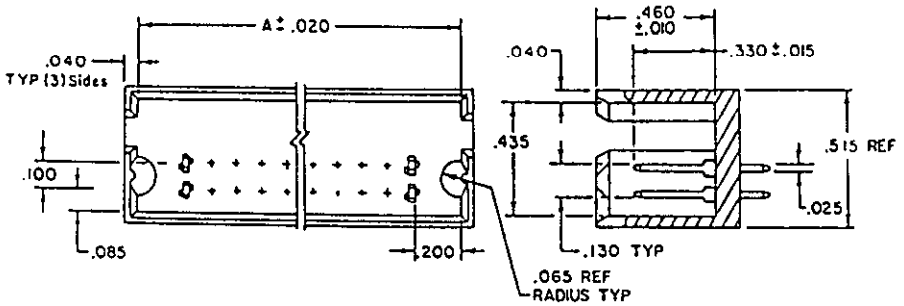

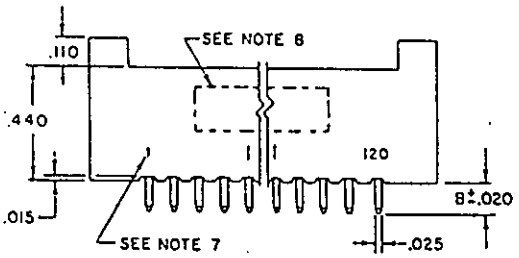

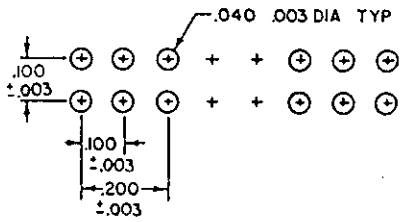

RECOMMEND PRINTED CIRCUIT BOARD LAYOUT

B	A	No. of Pcs.	Part No.
.180	2.800	50	M55302/165-1
.180	3.300	60	M55302/165-2
.180	4.300	80	M55302/165-3
.180	5.300	100	M55302/165-4
.180	6.300	120	M55302/165-5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.010 (.25 mm).
4. These connectors mate with configuration 2 specified in MIL-C-55302/128.
5. Post location tolerances are non-cumulative.
6. Post tips must be maintained within .020 (.51 mm) diameter true position within shroud.
7. The first and last circuit shall be numbered and every fifth cavity shall have an identifiable mark on the front surface of the housing beginning with the first circuit on the left (#1) looking at the mating face of the connector.
8. Connector identification marking can appear on either side of insulation.

INCH	MM
.003	.08
.010	.25
.015	.38
.020	.51
.025	.63
.040	1.02
.065	1.65
.085	2.16
.100	2.54
.110	2.79
.130	3.30
.200	5.08
.330	8.38
.435	11.05
.440	11.18
.460	11.69
.515	13.00

FIGURE 1. Connectors, plug, .100 spacing.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Material: In accordance with MIL-C-55302.

Plating: The contact plating shall be gold per MIL-G-45204, Type II, grade C, class 1 over nickel per QQ-N-290, class 2, 30 to 150 microinches in the contact area, and a 100-200 tin-lead plating on the solder tail.

Mating and unmating: In accordance with MIL-C-55302/128.

Contact resistance: In accordance with MIL-C-55302/128.

Dielectric withstanding voltage:

Sea level: 750 V rms.

High altitude: 275 V rms at 70,000 feet.

Contact rating: In accordance with MIL-C-55302/128.

Mating connectors: Shall conform to MIL-C-55302/128, configuration 2.

Part number: See figure 1.

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - AS, OS, SH
Air Force - 11, 85
DLA - ES

User activities:
Army - AT, AV, ME
Navy - MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Air Force - 17

(Project 5935-3281-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:55Z
Check the source to verify that this is the current version before use.