INCH-POUND

MIL-T-55155/10B

19 March 1990


SUPERSEDING
MIL-T-55155/10A
27 October 1971

MILITARY SPECIFICATION SHEET

TERMINALS, STUD (INSULATED), STYLE SE10

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-55155

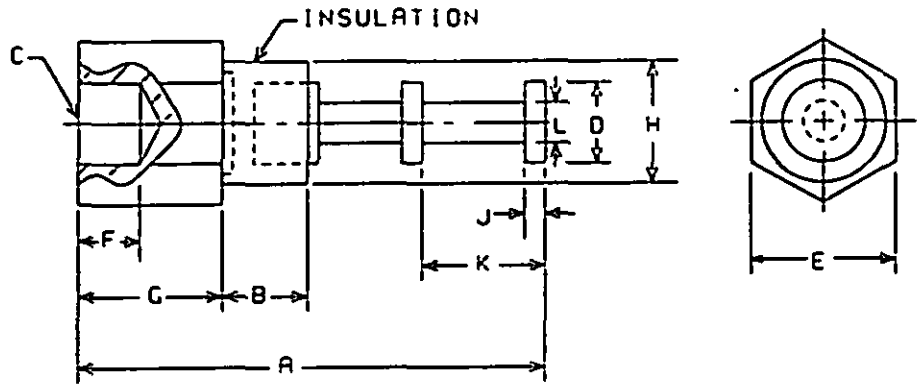

PART 1/ NUMBER	DIMENSIONS										
	A	B	C (UNC-2B)	D	E	F	G	H	J	K	L
M55155/10--01	.546	.218	No. 4-40	.066	.156	.100	.181	.125	.018	.049	.045
M55155/10--02	.718	.156	No. 6-32	.140	.250	.156	.258	.245	.025	.125	.063

FIGURE 1. CONFIGURATION AND DIMENSIONS.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:30Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .015 inch.
3. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Insulation material: Polytetrafluoroethylene.

Dielectric withstanding voltage: See table I.

TABLE I. Dielectric withstanding test voltage.

Part Number 1/	Pressure	Volts ac (rms) (min)
M55155/10--01	Atmospheric Reduced barometric	3,500 1,450
M55155/10--02	Atmospheric Reduced barometric	3,300 1,400

Pull: M55155/10--01 -- 7 pounds, min.
M55155/10--02 - 15 pounds, min.

Torque: M55155/10--01 - 1 ounce-inch, min.
M55155/10--02 - 3 ounce-inch, min.

Type of mounting: Tapped hole.

TABLE II. Substitutability data.

Part number in MIL-T-55155/10B 1/	Part number in MIL-T-55155/10A 2/
M55155/10--01	SE10-D01
M55155/10--02	SE10-D02

1/ The complete part number shall include the symbol for the insulation color (first dash) and the symbol for the conductor material and finish (second dash).

2/ The complete number included the symbol for the insulation color.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:30Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy -
Air Force - 99
DLA-GS

User activities:
Army - AV
Navy - MC
Air Force -

Preparing activity:
Army - ER

(Project 5940-1099-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:30Z
Check the source to verify that this is the current version before use.