
MILITARY SPECIFICATION SHEET


TERMINAL BOARDS, MOLDED, BARRIER,

STUD TYPE, CLASS 6TB

The complete requirements for procuring the terminal boards described herein shall consist of this document and the issue in effect of Specification MIL-T-55164.

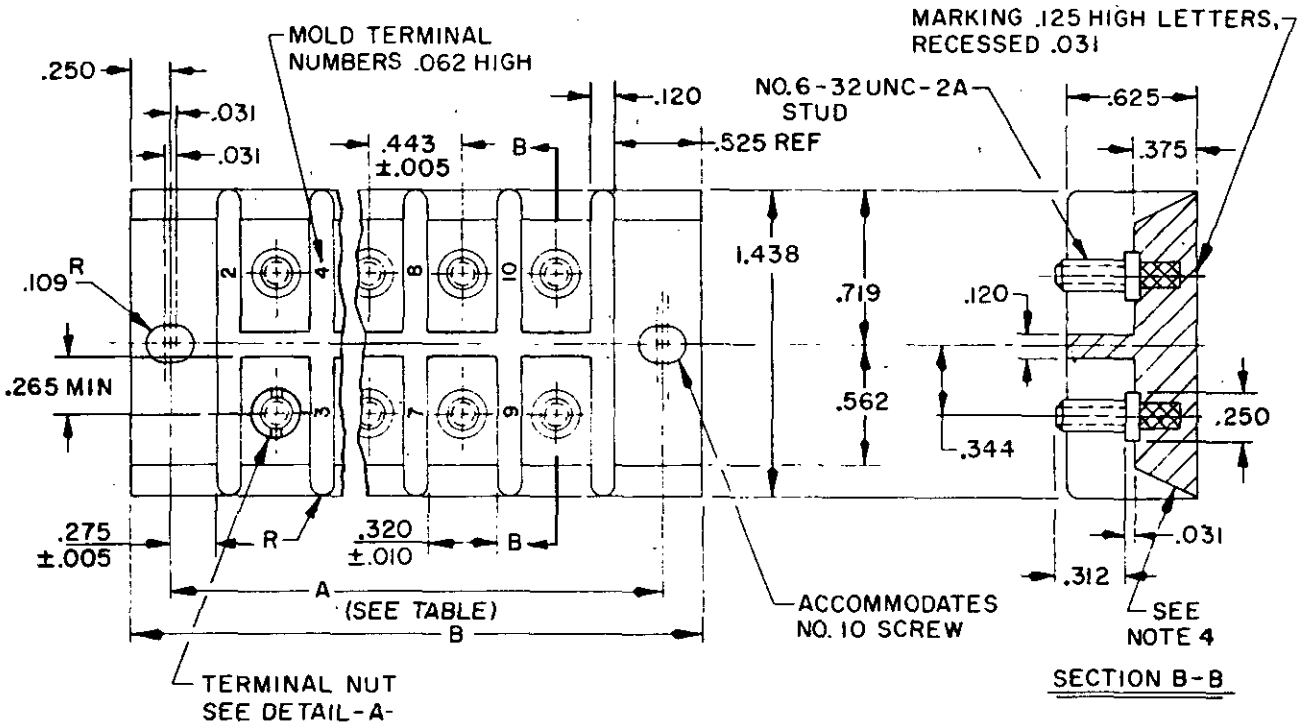

INCHES	MM	INCHES	MM
.005	.13	.265	6.73
.010	.25	.275	6.99
.016	.41	.312	7.92
.031	.79	.320	8.13
.050	1.27	.344	8.74
.062	1.57	.375	9.53
.109	2.77	.443	11.25
.120	3.05	.525	13.34
.125	3.18	.562	14.27
.141	3.58	.625	15.88
.234	5.94	.719	18.26
.250	6.35	1.438	36.53

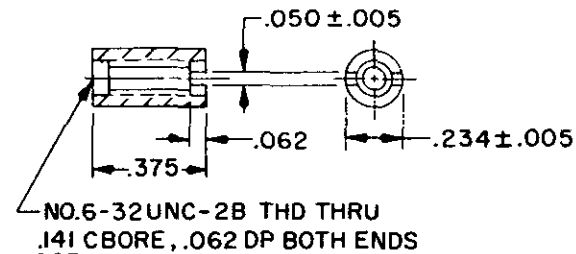

DETAIL-A- TERMINAL NUT

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is .xxx±.016
4. Terminal board base width may be .125 less than barrier width.
5. Class 6TB terminal boards are inactive for new design.

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 20261O-22T22:32Z
Check the source to verify that this is the current version before use.

Type designation	Dimensions A ±.016		Dimensions B ±.016		Recommended wire terminal lugs MIL-E-16366	Recommended wire terminal lugs MS-17143	Maximum number of terminal lugs for each stud	Terminal nuts required	Federal stock number
	inch	(mm)	inch	(mm)		(dash no.)			FSN-5940
6TB6	2.000	(50.80)	2.500	(63.40)	L-81	-4	4	6	500-5373
6TB10	2.875	(73.03)	3.375	(85.73)	L-81	-5	4	10	542-9333
6TB24	6.000	(152.40)	6.500	(165.10)	L-81	-6	4	24	577-7462

REQUIREMENTS:

Dimensions and configuration: See figure and table.

Voltage rating (maximum): 600 volts.

Current rating: 30 amps.

Plastic material: Type MAI-60 of MIL-M-14.

Dielectric withstanding test voltage: 2,200 volts rms.

Custodians:
Army - EL
Navy - SH
Air Force - 17

Review activities:
Army - EL, MU
Navy - SH, OS, AS
Air Force - 85

User activities:
Army - ME, AT, AV
Navy - MC, CG
Air Force - 11

Preparing activity:
Army - EL

(Project 5940-0403)

Code "C"

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:32Z
Check the source to verify that this is the current version before use.