
MILITARY SPECIFICATION SHEET


BLOWERS: MINIATURE, FOR COOLING ELECTRONIC EQUIPMENT CENTRIFUGAL (9.8 WATTS INPUT POWER)


THIS SPECIFICATION IS INACTIVE FOR NEW DESIGN AFTER THE DATE OF THIS SPECIFICATION, WITHOUT REPLACEMENT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the blower described herein shall consist of this specification sheet and the latest issue of MIL-B-23071.

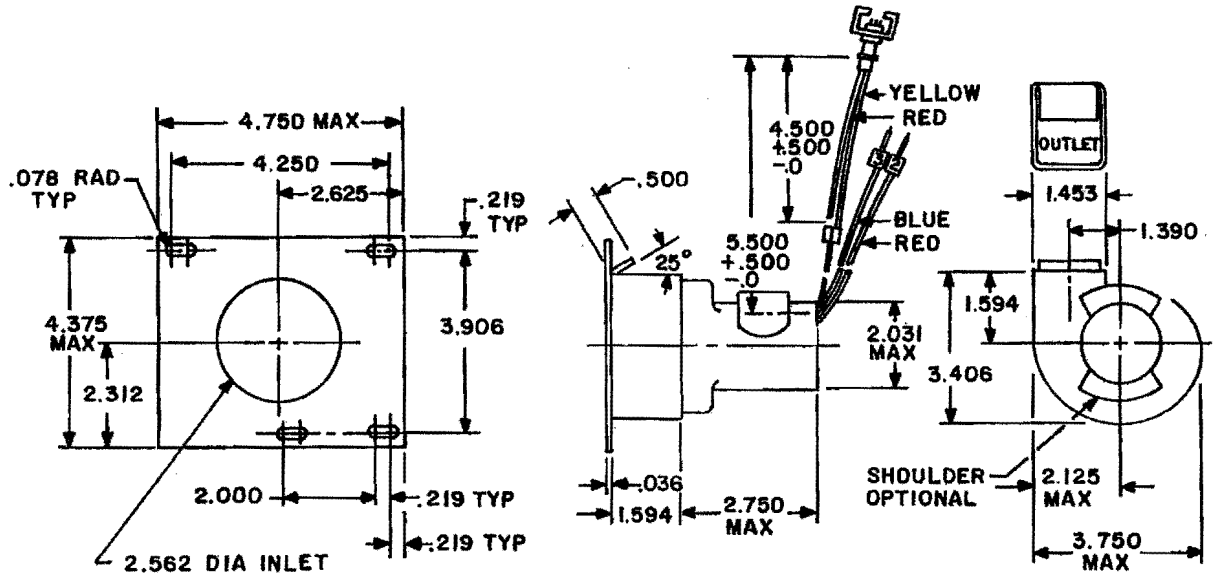

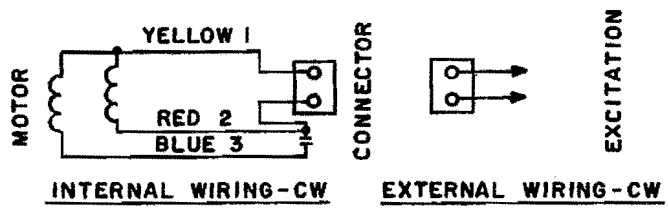

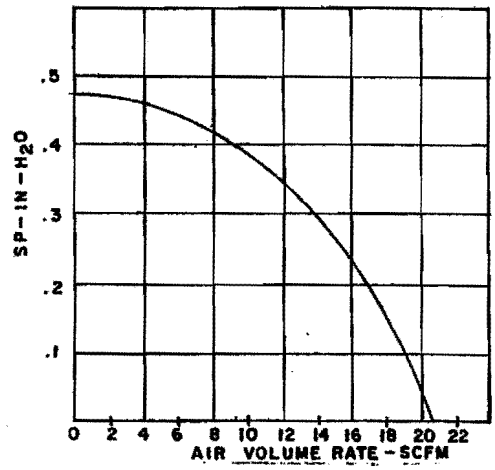

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance on decimals is ±.010 (0.25 mm), angles ±1 degree.

FIGURE 1. Configurations and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:27Z
Check the source to verify that this is the current version before use.

PART NUMBER - M23071/11-001

REQUIREMENTS:	VALUE	UNIT	TOLERANCE
BLOWER WEIGHT	2	lbs	maximum
EXCITATION			
Nominal			
Voltage	115	volts, rms	±10 percent
Frequency	60	Hertz	±5 percent
Phase	1		
Duty Cycle	Continuous		
Speed	3300	rpm	
Rated			
Voltage	115	volts, rms	±2.0 percent
Frequency	60	Hertz	±1.0 percent

Connector: Continental type C4-20 PVS plus C4HC hood or equal (or) Winchester type M4P-LSH 10C or equal.

Capacitor: 1.0 MFD, 220 WVAC rated, not supplied with blower.

Wiring: All motor leads to be MIL-W-16878 Type E-24. Leads 2 and 3 to be 5 3/4 + 1/4 inches long. All unterminated leads to be stripped 1/2 inch and tinned.

Impeller housing: 20 guage material.

Bearings: 'A hydrodynamic air journal bearing system shall be used.

POWER CONSUMPTION AT RATED EXCITATION

Current, Running	.19	amps	maximum
Current, Lock Rotor	.27	amps	maximum
Power, Input	9.8	watts	maximum

OUTPUT PERFORMANCE AT RATED EXCITATION

Air volume, zero SP at .075	18	CFM	minimum
Air volume, rated SP at .075	13.5	CFM	min at 0.25 inches H_2O
Temperature rise, winding	13	°C	maximum
Generated vibration	2.8	lbs-rms	maximum

LINE VOLTAGE AND FREQUENCY EXCITATION LIMITS

The maximum decrease in shaft speed at any combination of nominal excitation (in accordance with Table VI of MIL-B-23071) shall not be greater than 8 percent of the reference speed at rated excitation.

ENVIRONMENTAL TEST LIMITS

Cold Start Rest	-54	°C	±5°C
Extended Life Test	1000	hours	min at 100°C

SPECIAL REQUIREMENT:

LIFE EXPECTANCY	20,000	hours	min at 50°C
	15,000	hours	min at 65°C

QUALIFICATION: NOT APPLICABLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:27Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ME
Navy - EC
Air Force - 82

Review activities:
Army - MI
Navy - SH, AS
Air Force -

User activities:
Army -
Navy -
Air Force - 17, 70, 11

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 4140-0119)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:27Z
Check the source to verify that this is the current version before use.