MIL-B-23071/1D
29 April 1977
SUPERSEDING
MIL-B-0023072/1C(US
26 November 1973, a
MIL-B-23071/1B
29 September 1972


MILITARY SPECIFICATION SHEET


BLOWERS: MINIATURE, FOR COOLING ELECTRONIC EQUIPMENT TUBE AXIAL (26 and 35 WATTS INPUT POWER)


This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the blowers described herein shall consist of document and the latest issue of Specification MIL-B-23071.

INCHES	MM
.062	1.57
.093	2.36
.453	11.51
.750	19.05
1.625	41.28
2.500	63.50
4.266	108.36
6.858	174.19
7.044	178.92

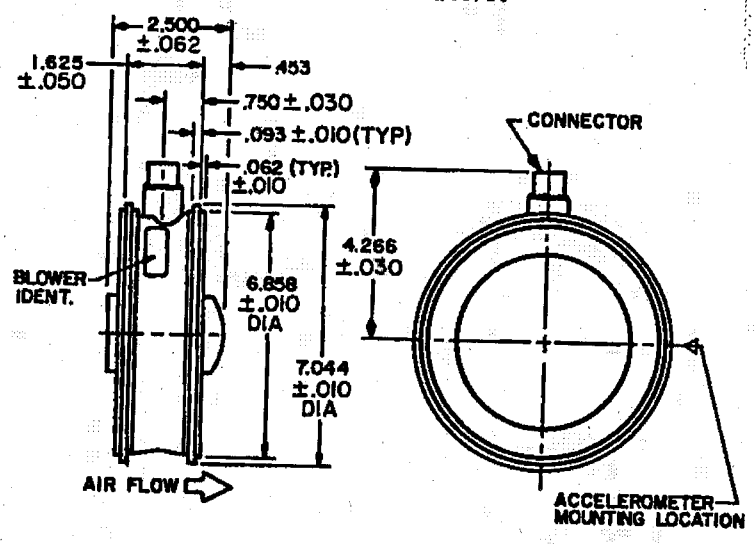

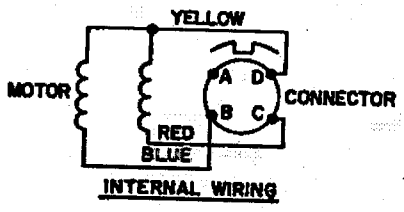



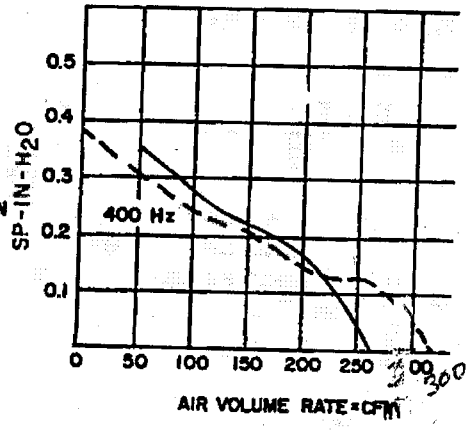

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Connector: MS 3112-8-4P.
5. Capacitor: not supplied with blower. The capacitance value and working voltage will depend on the specific blower types as follows: M23071/1-001, 2.0 MFD, 220 WVac, M23071/1-002, 1.0 MFD, 220 WVac.

FIGURE 1. Configurations and dimensions.

FSC 4140

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:25Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers and requirements.

Requirements	Part numbers		Unit	Tolerance
	M23071/1-001	M23071/1-002		
	value			
Blower weight	2	2	lbs	maximum
Excitation				
Nominal				
Voltage	115	115	volts, rms	±10 percent
Frequency	60	400	Hertz	±5 percent
Phase	1	1	---	---
Duty cycle	Continuous	Continuous	---	---
Speed	3200	3650	rpm	---
Rated				
Voltage	115	115	volts, rms	±2.0 percent
Frequency	60	400	Hertz	±1.0 percent
Power consumption at rated excitation				
Current, running	0.25	0.35	amps	maximum
Current, lock rotor	0.36	0.375	amps	maximum
Power, input	28	35.0	watts	maximum
Output performance at rated excitation				
Air volume, zero SP at .075	265	280	CFM	minimum
Air volume, rated SP at .075	165	140	CFM	min at 0.18 inches H_2O
Temperature rise, winding	60	42	°C	maximum
Generated vibration	2.8	2.8	lbs-rms	maximum
Environmental test limits				
Cold start test	-54	-54	°C	±5°C
Extended life test	1000	1000	hours	min at 100°C
Life expectancy	55,000	55,000	hours MTBF	min at 50°C
	40,000	40,000	hours MTBF	min at 65°C

Line voltage and frequency excitation limits. The maximum decrease in shaft speed at any combination of nominal excitation (in accordance with table VI of MIL-B-23071) shall not be greater than 20 percent of the reference speed at rated excitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:25Z
Check the source to verify that this is the current version before use.

Qualification: Qualified sources may extend qualification to cover part number M23071/1-002 provided three blowers are subjected to and successfully pass the following tests:

Visual and mechanical examination
Weight
Warm-up period
Input current (running and lock rotor)
Input power
Speed (reference)
Generated vibration
Line voltage and frequency
Air flow performance
Temperature rise

Custodians:
Army - ME
Navy - EC
Air Force - 99

Review activities:
Army - MI
Navy - SH, AS
Air Force - 11
DLA - ES

User activities:
Air Force - 17,

Preparing activity
Navy - EC

Agent:
DLA - ES

(Project 4140-[illegible] 0156

☆U.S. GOVERNMENT PRINTING OFFICE: 1977-703-020/3445

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procure ment of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the docum DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the prod are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTR

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)* .

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:25Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

POSTAG
NAV

OFFICAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:25Z
Check the source to verify that this is the current version before use.