
MIL-B-23071/3B
29 September 1972
SUPERSEDING
MIL-B-23071/3A(NAVY)
5 March 1964

MILITARY SPECIFICATION SHEET
BLOWERS: MINIATURE, FOR COOLING ELECTRONIC EQUIPMENT
CENTRIFUGAL (50 WATTS INPUT POWER)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the blower described herein shall consist of this document and the issue in effect of MIL-B-23071.

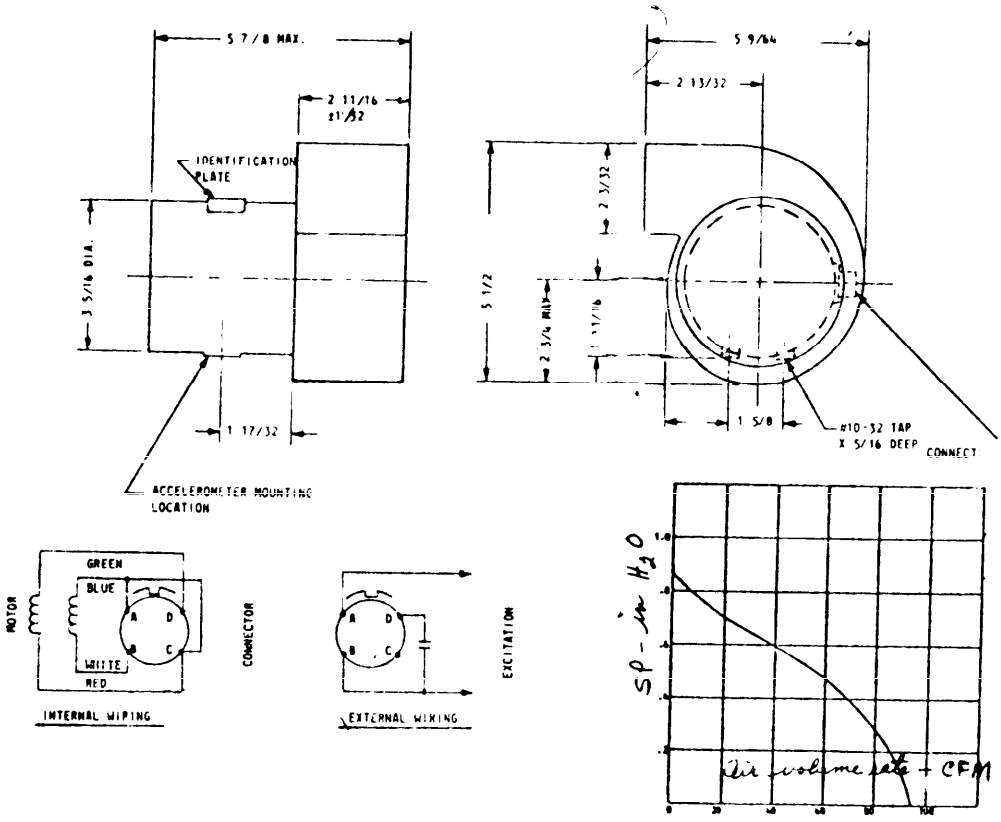

NOTES:

1. Connector - MS-3112E-8-4P.
2. Capacitor - 4.0 mfd., 220 WVAC rated.
3. Outlet orientation with respect to the mounting flats - The blower shall be supplied with the discharge outlet direction as shown. The blower shall be capable of discharge directions 90, 180, and 270 degrees from that shown.
4. Unless otherwise specified dimensions are in inches. Tolerance on fractions ± 1/16, decimals ± .010, angles ± 1 degree.

FIGURE 1. Configurations and dimensions.

FSC 4140

Source: https://assist.dla.mil -- Downloaded: 202610-19T15:26Z
Check the source to verify that this is the current version before use.

PART NUMBER - M23071/3-001

REQUIREMENTS:	VALUE	UNIT	TOLERANCE
BLOWER WEIGHT	4	lbs	maximum
EXCITATION			
Nominal			
Voltage	115	volts, rms	± 10 percent
Frequency	60	Hertz	± 5 percent
Phase	1		
Duty Cycle	Continuous		
Speed	3300	rpm	
Rated			
Voltage	115	volts, rms	± 2.0 percent
Frequency	60	Hertz	± 1.0 percent
POWER CONSUMPTION AT RATED EXCITATION			
Current, Running	0.25	amps	maximum
Current, Lock Rotor	0.50	amps	maximum
Power, Input	50	watts	maximum
OUTPUT PERFORMANCE AT RATED EXCITATION			
Air volume, zero SP at .075	93	CFM	minimum
Air volume, rated SP at .075	70	CFM	min at 0.40 inches H_2O
Temperature rise, winding	40	°C	maximum
Generated vibration	2.8	lbs-rms	maximum

LINE VOLTAGE AND FREQUENCY EXCITATION LIMITS

The maximum decrease in shaft speed at any combination of nominal excitation (in accordance with Table VI of MIL-B-23071) shall not be greater than 20 percent of the reference speed at rated excitation.

ENVIRONMENTAL TEST LIMITS

Cold Start Test	-54	°C	± 5°C
Extended Life Test	1000	hours	min at 100°C

Source: https://assist.dla.mil -- Downloaded: 202640-19T15:26Z
Check the source to verify that this is the currentversion before use.

SPECIAL REQUIREMENT:	VALUE	UNIT	TOLERANCE
LIFE EXPECTANCY	55,000	hours MTBF	min at 50°C
	45,000	hours MTBF	min at 65°C

Custodians:
Army - ME
Navy - EC
Air Force - 82

Review activities:
Army - MI
Navy - SH, AS
Air Force -

User activities:
Army -
Navy -
Air Force - **17, 70, 11**

Preparing activity:
Navy - EC

(Project 4140-0036)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:26Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

[ ] DIRECT GOVERNMENT CONTRACT [ ] SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

[ ] YES [ ] NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 68 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N 0102-014-1801

Source: https://assist.dla.mil -- Downloaded: 202610-19T15:26Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:26Z
Check the source to verify that this is the current version before use.