
MILITARY SPECIFICATION SHEET

BLOWERS: MINIATURE, FOR COOLING ELECTRONIC EQUIPMENT TUBEAXIAL (14, 40, 17 AND 39 WATTS INPUT POWER)

This specification is approved for use by all departments and agencies of the Department of Defense.

The complete requirements for procuring the blower described herein shall consist of this document and the latest issue of Specification MIL-B-23071.

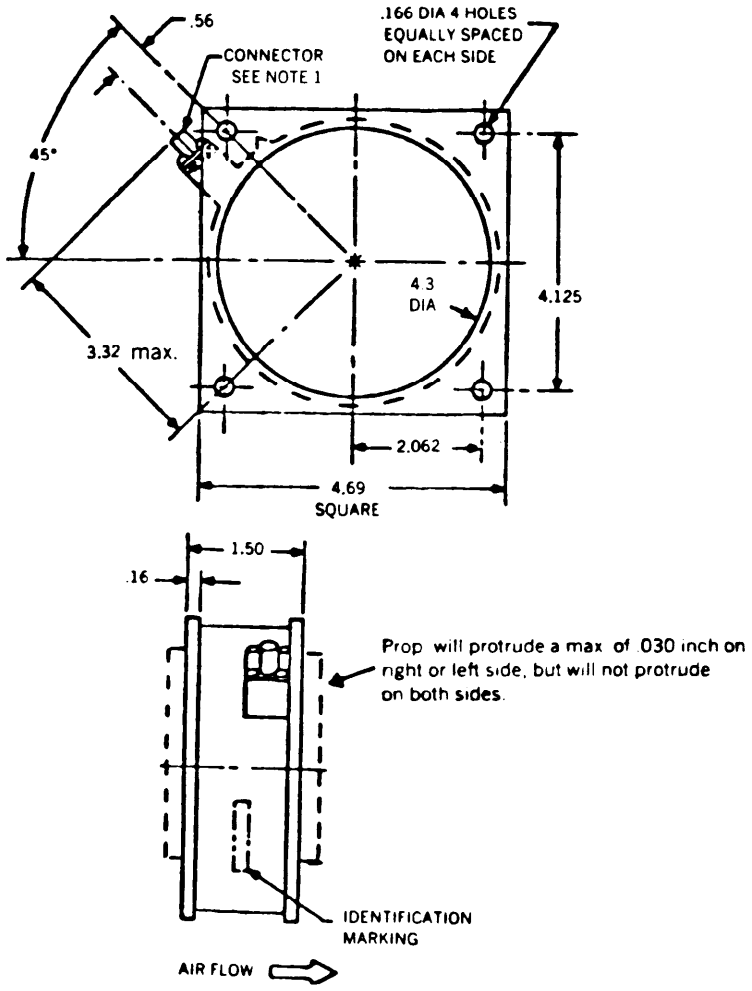

INCHES	MM
.16	4.1
.166	4.22
.56	14.2
1.50	38.1
2.062	52.37
3.32	84.33
4.125	104.78
4.69	119.13


FIGURE 1. Configurations and dimensions.


AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 4140

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:26Z
Check the source to verify that this is the current version before use.

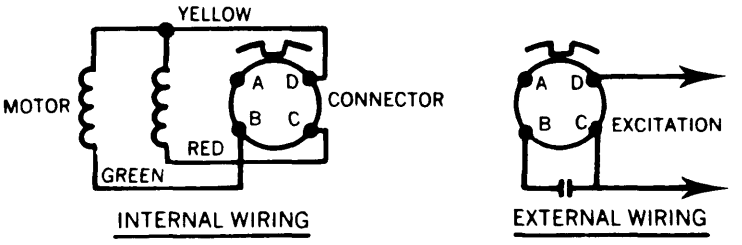

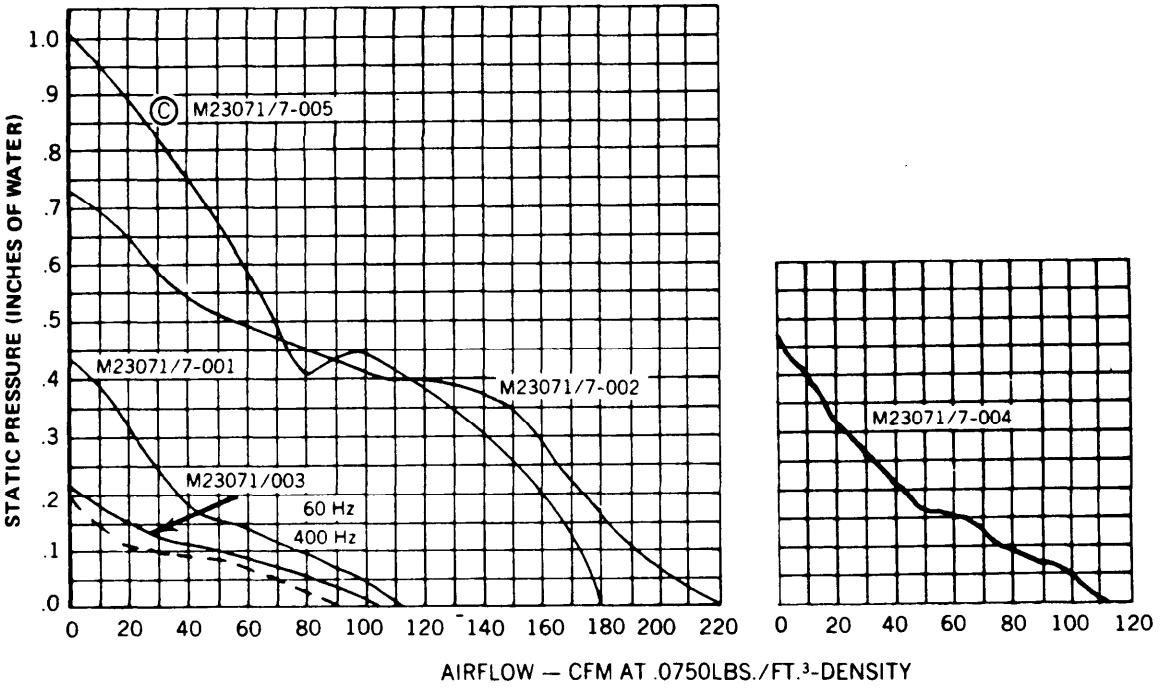

NOTES:

1. Connector: MS 3112E-8-4P. (For Air Force use MS 3470.)
2. Capacitor: Not supplied with blower. The capacitance value and working voltage will depend on the specific M23071 blower types as follows: -001, 1.0 MFD, 220 WVAC; -002, 0.22 MFD, 237 WVAC; -003, 1.0 MFD, 220 WVAC; -004, 1.0 MFD, 220 WVAC; -005, 1.2 MFD, 165 WVAC.
3. Unless otherwise specified, tolerances are ±.010 (.25) for three-place decimals and ±.03 (.5) for two-place decimals, angles ± 1°.
4. Dimensions are in inches.
5. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Configurations and dimensions - continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:26Z
Check the source to verify that this is the current version before use.

Requirements:

Dimensions and configuration: See figure 1.

Design and construction:

Weight:	1.5 pounds, maximum.
Excitation:	See table I.
Power consumption:	See table II.
Output performance:	See table III.

Cold start: -54° ±5°C per hr.

Vibration generated: 2.8 pounds, rms, maximum.

Extended life: 1,000 hours minimum at 100°C

Life expectancy: See table IV.

TABLE I Excitation

Nominal 1/						Rated	
Dash no	Voltage Vrms ±10%	Frequency Hz ±5%	Phase	Duty cycle	Speed rpm	Volts rms ±2.0%	Hz ±1.0%
001	115	60	1	Cont	3200	115	60
002	115	400	1	Cont	5500	115	400
003	115	60/400	1	Cont	2500/2800	115	60/400
004	115	60	1	Cont	3200	115	60
© 005	115	400	1	Cont	5450	115	400

1/ The maximum decrease in shaft speed at any combination of nominal excitation (see table VI MIL-B-23071) shall not be greater than 20 percent of the reference speed at rated excitation

TABLE II Power consumption (at rated excitation)

Current			Power input
Dash no	Running amperes	Lock rotor amperes	Watts
	max	max	max
001	0.12	0.17	14
002	0.77	0.99	40
003	0.22/0.5C	0.22/0.50	17/39
004	0.15	0.17	15
© 005	0.38	0.45	43

TABLE III Output performance (at rated excitation)

Dash no.	Air volume Zero sp at .075	Air volume rated sp at .075	Temperature rise (winding)
	CFM min	CFM min. at inch H_2O	max
001	110	76@0.1	44°C
002	180	160@0.15	55°C
003	85/85	60/60@0.05	32/60°C
004	103	75@0.10	44°C
© 005	170	151@0.15	60°C

Part number M23071/7-(and dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:26Z
Check the source to verify that this is the current version before use.

TABLE IV. Life expectancy

Dash no.	Hours	°C
		min
001	65,000 50,000	50 65
002	20,000 15,000	50 65
003	20,000 15,000	50 65
004	65,000 50,000	50 65
© 005	20,000 15,000	50 65

Custodians:
Army — ME
Navy — EC
Air Force — 99

Review activities:
Army — MI
Navy — AS
Air Force — 82
DLA — GS

User activities:
Army —
Navy — OS, SH
Air Force — 11,17

Preparing activity:
Navy — EC

Agent:
DLA-GS

(Project 4140-0131)

Source: https://assist.dla.mil -- Downloaded: 202640-19T15:26Z
Check the source to verify that this is the current version before use.