MILITARY SPECIFICATION SHEET

BLOWERS: MINIATURE, FOR COOLING ELECTRONIC EQUIPMENT
CENTRIFUGAL (138 WATTS INPUT POWER)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the blower described herein shall consist of this document and the issue in effect of MIL-B-23071.


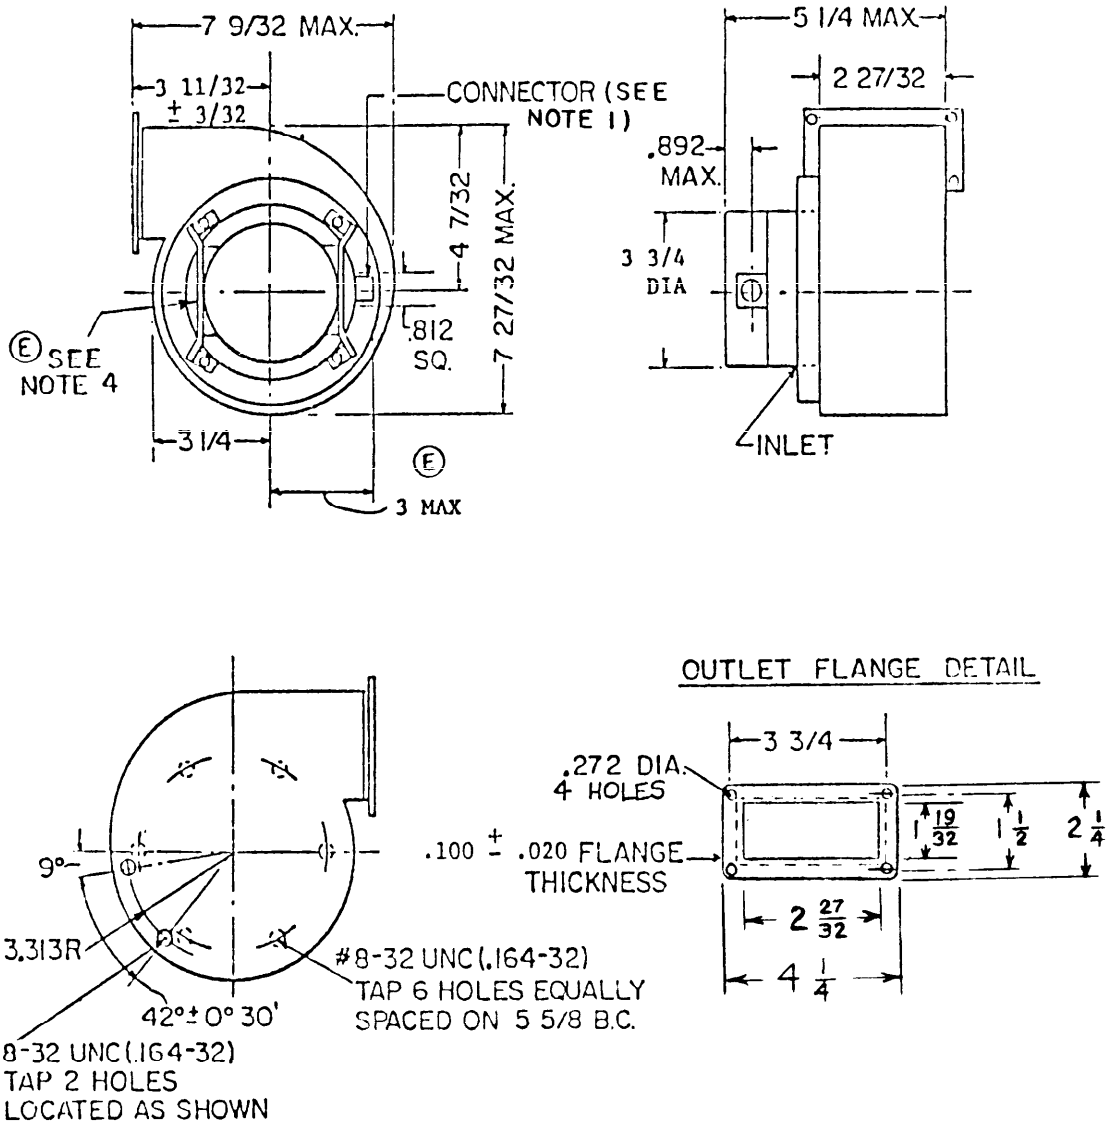



FIGURE 1. Configurations and dimensions.

Ⓔ Denotes changes

FSC 4140

Source: https://assist.dla.mil -- Downloaded: 202610-19T15:27Z
Check the source to verify that this is the current version before use.

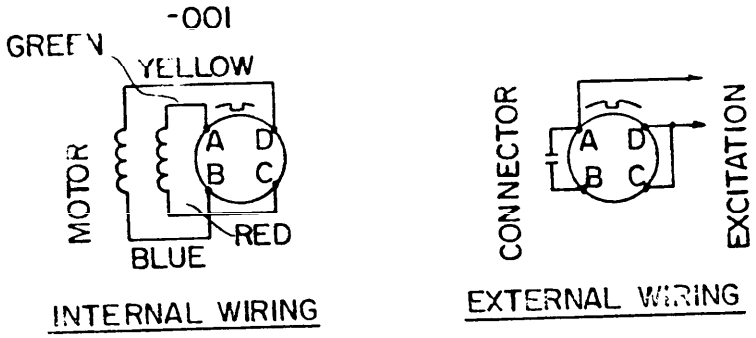

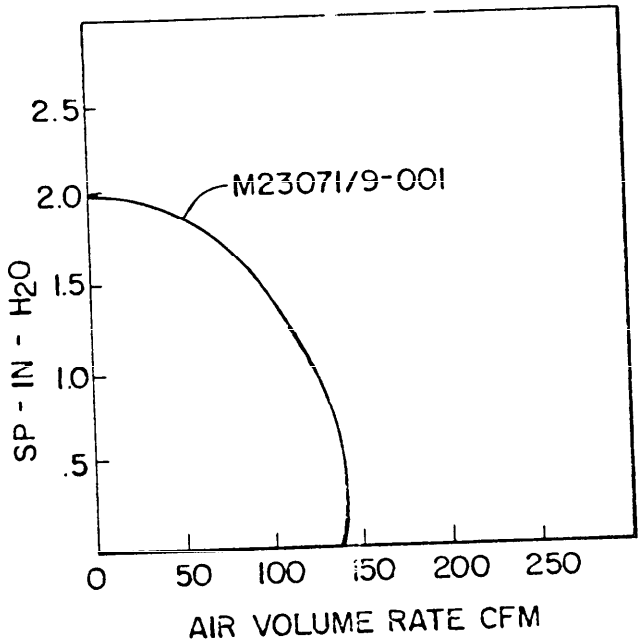

NOTES:

1. Connector: MS 3112E8-4P. Location of connector is optional within 80 degrees.
2. Capacitor: 4.0 MFD, 220 WVAC rated, not supplied with blower.
3. Unless otherwise specified dimensions are in inches. Tolerance on fractions ±1/16, decimals ±.010, angles ±1 degree.
4. Location of spider mounting brackets is optional about the circumference of the motor.

FIGURE 1. Configurations and dimensions. (Continued)

Source: https://assist.dla.mil -- Downloaded: 20260-19T15:27Z
Check the source to verify that this is the current version before use.

RT NUMBER:	M23071/9-001 E		
REQUIREMENTS :	VALUE	UNIT	TOLERANCE
BLOWER WEIGHT	8.5	lbs	Maximum
EXCITATION			
Nominal			
Voltage	115	volts, rms	±10 percent
Frequency	60	Hertz	±5 percent
Phase	1		
Duty Cycle	Continuous		
Speed	3200	rpm	
Rated			
Voltage	115	volts, rms	±2.0 percent
Frequency	60	Hertz	±1.0 percent
POWER CONSUMPTION AT RATED EXCITATION			
Current, running	1.2	amps	maximum
Current, lock rotor	2.4	amps	maximum
Power, Input	138	watts	maximum
OUTPUT PERFORMANCE AT RATED EXCITATION			
Air volume, zero SP at .075	135	CFM	minimum
Air volume, rated SP at .075	101	CFM	min at 1.25 inches H_2O
Temperature rise, winding	35	°C	maximum
Generated vibration	2.8	lbs-rms	maximum

LINE VOLTAGE AND FREQUENCY EXCITATION LIMITS

The maximum decrease in shaft speed at any combination of nominal excitation (in accordance with Table VI of MIL-B-23071) shall not be greater than 20 percent of the reference speed at rated excitation.

ENVIRONMENTAL TEST LIMITS

Cold Start Test	-54	°C	±5°C
Extended Life Test	1000	hours	min at 100°C

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:27Z
Check the source to verify that this is the current version before use.

SPECIAL REQUIREMENT:	VALUE	UNIT	TOLERANCE
LIFE EXPECTANCY	20,000	hours	min at 50°C
	15,000	hours	min at 65°C

Custodians:
Army - ME
Navy - EC
Air Force - 99

Review activities:
Army -
Navy -
Air Force - 82
DLA - GS

User activities:
Army -
Navy - AS, SH
Air Force - 17, 11

Preparing activity:
Navy - EC

Agent:

DLA - GS

(Project 4140-0124)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:27Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-B-23071/9E	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 202610-19T15:27Z
Check the source to verify that this is the current version before use.