INCH –POUND

MIL-C-71042 (AR)
AMENDMENT 2
27 March 1998
SUPERSEDING
AMENDMENT 1
26 August 1994

MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY, LOGIC: 11784523

This amendment forms a part of MIL-C-71042(AR), dated 14 February 1992, and is approved for use by the U.S. Army Armament, Research, Development and Engineering Center, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 4

* 3.6.5: Delete “+/- 12Vdc” and substitute “+ 12Vdc”

PAGE 5

3.6.6: Delete “3.5.2 and 3.5.3” and substitute “3.6.2 and 3.6.3”
* Delete, 2 places: “+12+/-0.1Vdc” and substitute “+1.5Vdc +/-.1”

3.6.7: Delete “3.5.2 and 3.5.3” and substitute “3.6.2 and 3.6.3”

* 3.6.8.1, Subparagraph c: Delete “39 +/-5 ms” and substitute “44 ms +/-5 ms”

DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:19Z
Check the source to verify that this is the current version before use.

3.6.8.1, Subparagraph d: Delete “3.5 +/- .5 ms” and substitute “5 +/- .625 ms”

* 3.6.8.2a: Delete from PIN B “11.6 Vdc min after 11 +/- 2 secs” and substitute “11.6 Vdc min .. After 11 +/- 2 secs”

PAGE 6

3.7: After drawing number 11785556, add “Note 1”

PAGE 7

* Delete: “Figure 1” and substitute new “Figure 1” (see page 4)

PAGE 13

4.7.3.1.1, Subparagraph h: Delete “8.36 +/- 0.1 Vdc and substitute “8.36 +/- 0.45 Vdc”

PAGE 15

* 4.7.3.1.4d Delete: “The voltage shall be + 0.75 Vdc maximum after 11 +/- 2 seconds.” and substitute “The voltage shall be +0.75 maximum. After 11 +/- 2 seconds:”

PAGE 16

* 4.7.3.1.7.2, Subparagraph h: Delete “39 +/- 5 ms” and substitute “44 ms +/- 5 ms”

Subparagraph j: Delete “3.5 +/- .5 ms” and substitute “5 +/- .625 ms”

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:19Z
Check the source to verify that this is the current version before use.

* 4.7.3.1.7.4 Delete in its entirety and substitute the following:

"4.7.3.1.7.4 Function switch in position 3 (simulated) test to meet requirements of 3.6.8.3

a. Repeat 4.7.3.1.7.1.b, c, and d.
b. Remove pin S and J from GND.
c. Short pin L to GND.
d. Remove 12 Vdc from pin E
e. Measure the voltage at pin C. The voltage shall be 1.5 Vdc maximum
f. Measure the voltage at pin P, and B. The voltage shall be 0 Vdc +/- .1 Vdc
g. Measure the voltage at pin M, N, and R. The voltage shall be 12 Vdc +/- .1 Vdc
h. Apply a pulse of +12 Vdc amplitude and 1.0 ms pulse width at pin X
i. After 1 sec. short pin C to GND. [simulate target leaving upper limit]
j. After 3 sec. open pin P to GND. [simulate target at lower limit]
k. After 8 sec. short pin P to GND. [simulate target leaving lower limit]
l. After 4 sec. open pin C to GND. [simulate target at upper limit]
m. Measure the pulse at pin B. The pulse shall be + 12.0 Vdc Amplitude with a pulse width of 1.0 to 1.5 +/- .2 sec.
n. Measure the pulse at pin M. The time from the hit pulse to the falling edge of the pulse at pin M shall be 11 +/- 2 sec. with a pulse width of 3 to 5 sec.
o. Measure the pulse at pin R. This pulse shall fall to 0 Vdc at the hit pulse and rise 4 +/- .5 sec. later.
p. Measure the pulse at pin P. This pulse shall rise to 1.2 Vdc, 4 sec. after the hit pulse and fall again 8.1 sec. later.
q. Measure the pulse at pin N. This pulse shall rise to 12 Vdc 4 sec. after the hit pulse and fall again 7 +/- 2 sec. later"

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:19Z
Check the source to verify that this is the current version before use.

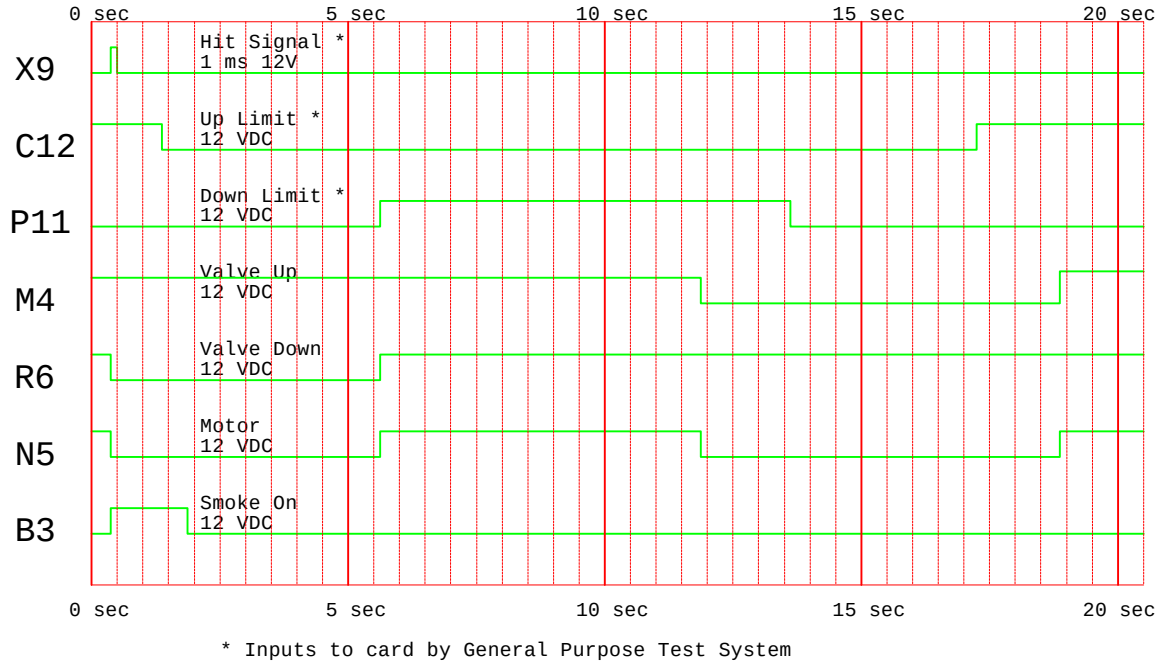

Figure 1. Voltage Outputs per Paragraph 3.6.8.3

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian
Army-AR

Preparing activity
Army-AR

(Project 5998-A087)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:19Z
Check the source to verify that this is the current version before use.