INCH POUND
MIL-PRF-3098/36F
13 April 2010
SUPERSEDING
MIL-PRF-3098/36E
19 December 2003

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR58/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-3098.

Pertinent characteristics: 0.8 MHz to 20 MHz; fundamental; noncontrolled; anti-resonance.

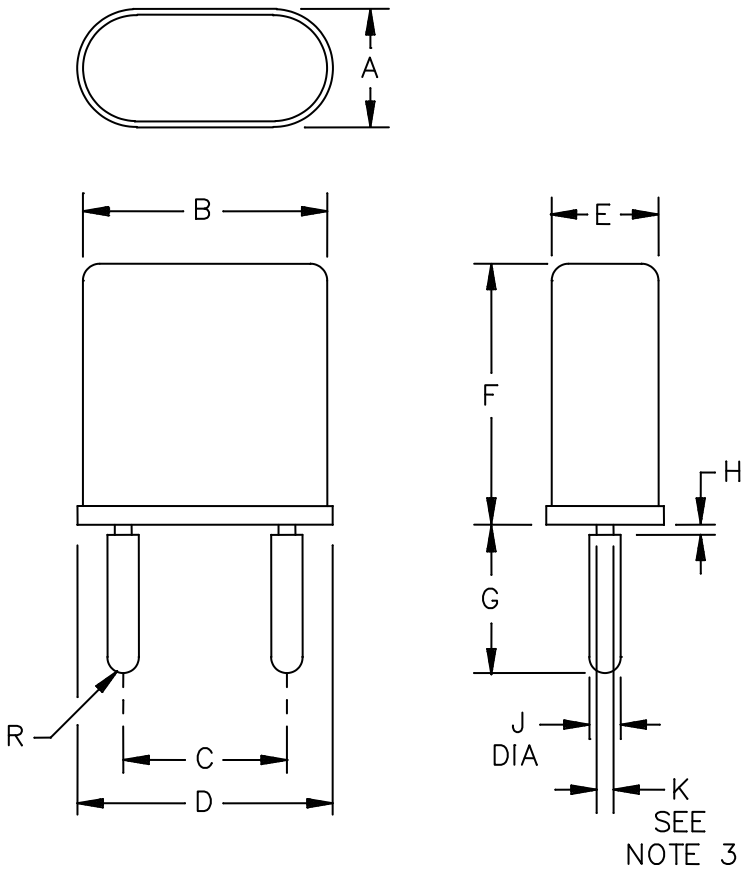

FIGURE 1. Crystal unit - CR58/U.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:26Z
Check the source to verify that this is the current version before use.

Ltr	Inches		mm	
	Min	Max	Min	Max
A	---	.352	---	8.94
B	---	.752	---	19.10
C	.478	.494	12.14	12.55
D	---	.757	---	19.23
E	---	.317	---	8.05
F	---	.775	---	19.69
G	---	.448	---	11.38
H	.012	.048	0.30	1.22
J	.091	.095	2.31	2.41
K	.048	.052	1.22	1.32

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The pin undercut may be omitted.
4. Marking to be in accordance with MIL-PRF-3098.

FIGURE 1. Crystal unit - CR58/U - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 0.8 MHz to 20 MHz, inclusive.

Capacitance, shunt: 7 pF maximum.

Frequency tolerance:

Operating temperature range: ±50 parts per million (ppm).

Equivalent resistance: See table I.

Mode of oscillation: Fundamental.

Antiresonance, load capacitance: 32.0 pF ±0.5 pF.

Operating temperature range: -55°C to +105°C, inclusive.

Rated drive level: 1.0 mW, maximum.

Shock: (specified pulse):

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: Below 2.0 MHz: ±15 percent
2.0 MHz and above: ±10 percent

Vibration: Method 201 of MIL-STD-202.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: Below 2.0 MHz: ±15 percent
2.0 MHz and above: ±10 percent

Temperature run:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: Below 2.0 MHz: ±15 percent
2.0 MHz and above: ±10 percent

Aging:

Frequency change permitted: ±5 ppm.

Part or Identifying Number (PIN): CR58/U (followed by specified frequency), see 1.2 of MIL-PRF-3098.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:26Z
Check the source to verify that this is the current version before use.

TABLE I. Equivalent resistance.

Frequency range, inclusive	Maximum resistance
MHz	Ohms
0.80 to 0.85	630
0.85+ to 0.90	600
0.90+ to 1.00	580
1.00+ to 1.12	540
1.12+ to 1.25	490
1.25+ to 1.37	450
1.37+ to 1.50	410
1.50+ to 1.62	380
1.62+ to 1.75	330
1.75+ to 1.87	300
1.87+ to 2.00	290
2.00+ to 2.12	270
2.12+ to 2.25	250
2.25+ to 2.60	200
2.60+ to 3.00	150
3.00+ to 3.40	110
3.40+ to 3.75	90
3.75+ to 4.00	75
4.00+ to 5.00	60
5.00+ to 7.00	35
7.00+ to 10.00	24
10.00+ to 15.00	22
15.00+ to 20.00	20

Referenced documents. In addition to MIL-PRF-3098, this document references the following:

MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:26Z
Check the source to verify that this is the current version before use.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air force - 99
DLA - CC

Review activities:
Army - AR, MI,
Navy - AS, MC, SH
Air Force - 19, 84

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5955-2009-048)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:26Z
Check the source to verify that this is the current version before use.