INCH POUND
MIL-PRF-3098/38F
27 August 1997
SUPERSEDING
MIL-C-3098/38E
9 November 1983

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR60A/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 5 MHz to 20 MHz; fundamental; noncontrolled; series resonance.

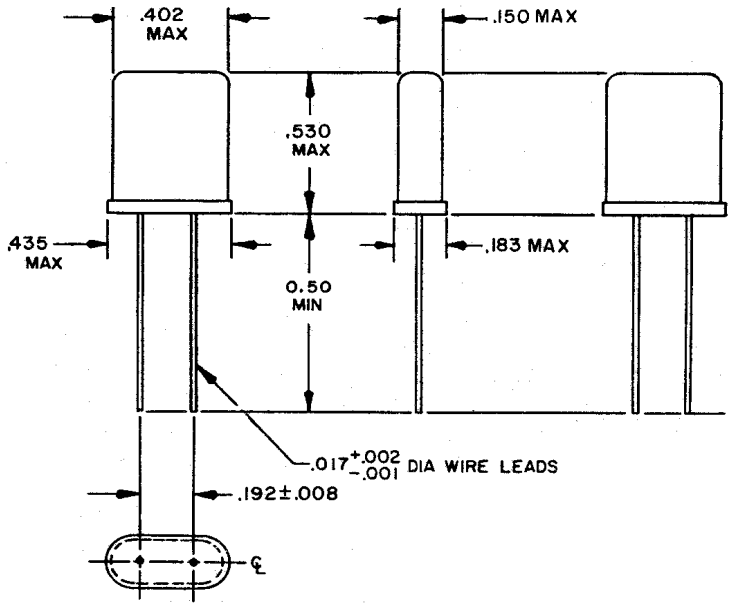

Inches	mm	Inches	mm	Inches	mm
.001	.03	.150	3.81	.435	11.05
.002	.05	.183	4.65	.500	12.70
.008	.20	.192	4.88	.530	13.46
.017	.43	.402	10.21		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking to be in accordance with MIL-PRF-3098.

FIGURE 1. Crystal unit - CR60A/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 5 MHz to 20 MHz, inclusive.

Capacitance, shunt: 7 pF, maximum.

Frequency tolerance (operating temperature range): ±50 parts per million (ppm).

Equivalent resistance: See table I.

Mode of oscillation: Fundamental.

Rated drive level: 1.0 mW, maximum.

Resonance: Series.

Operating temperature range (noncontrolled): -55°C to +105°C, inclusive.

Shock:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Vibration: Method 204 of MIL-STD-202, test condition A.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Thermal shock:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Aging:

Frequency change permitted: ±5 ppm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:27Z
Check the source to verify that this is the current version before use.

TABLE I. Equivalent resistance.

Frequency range, inclusive	Maximum resistance
MHz	Ohms
5 to 7	50
7+ to 10	30
10+ to 15	25
15+ to 20	20

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air force - 85

Review activities:
Army - AR, MI
Navy - AS, CG, MC, OS, SH
Air Force - 11, 17, 19, 99

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5955-0697-20)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:27Z
Check the source to verify that this is the current version before use.