INCH-POUND

MIL-DTL-83513/6E
25 June 2002
SUPERSEDING
MIL-PRF-83513/6D
15 August 1997

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, RECTANGULAR, PLUG, MICROMINIATURE, POLARIZED SHELL, PIN CONTACTS, CLASS P, SOLDER TYPE,

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83513.

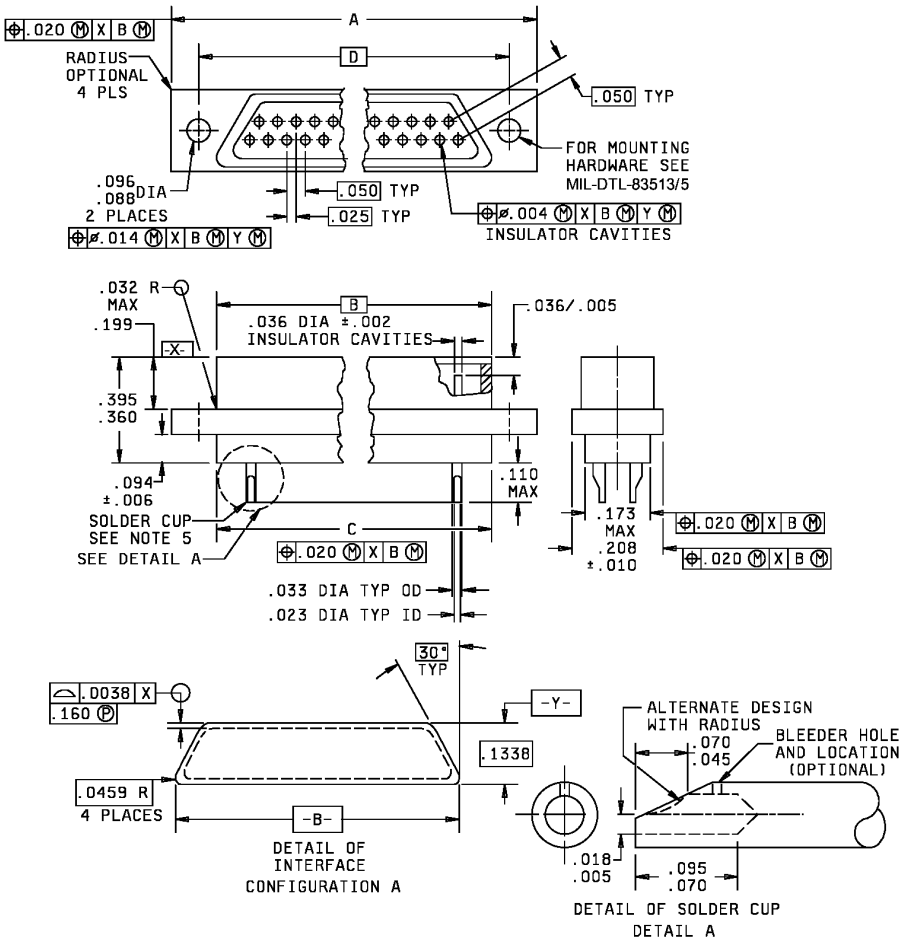


FIGURE 1. Connector, plug, .050 spacing.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:27Z
Check the source to verify that this is the current version before use.

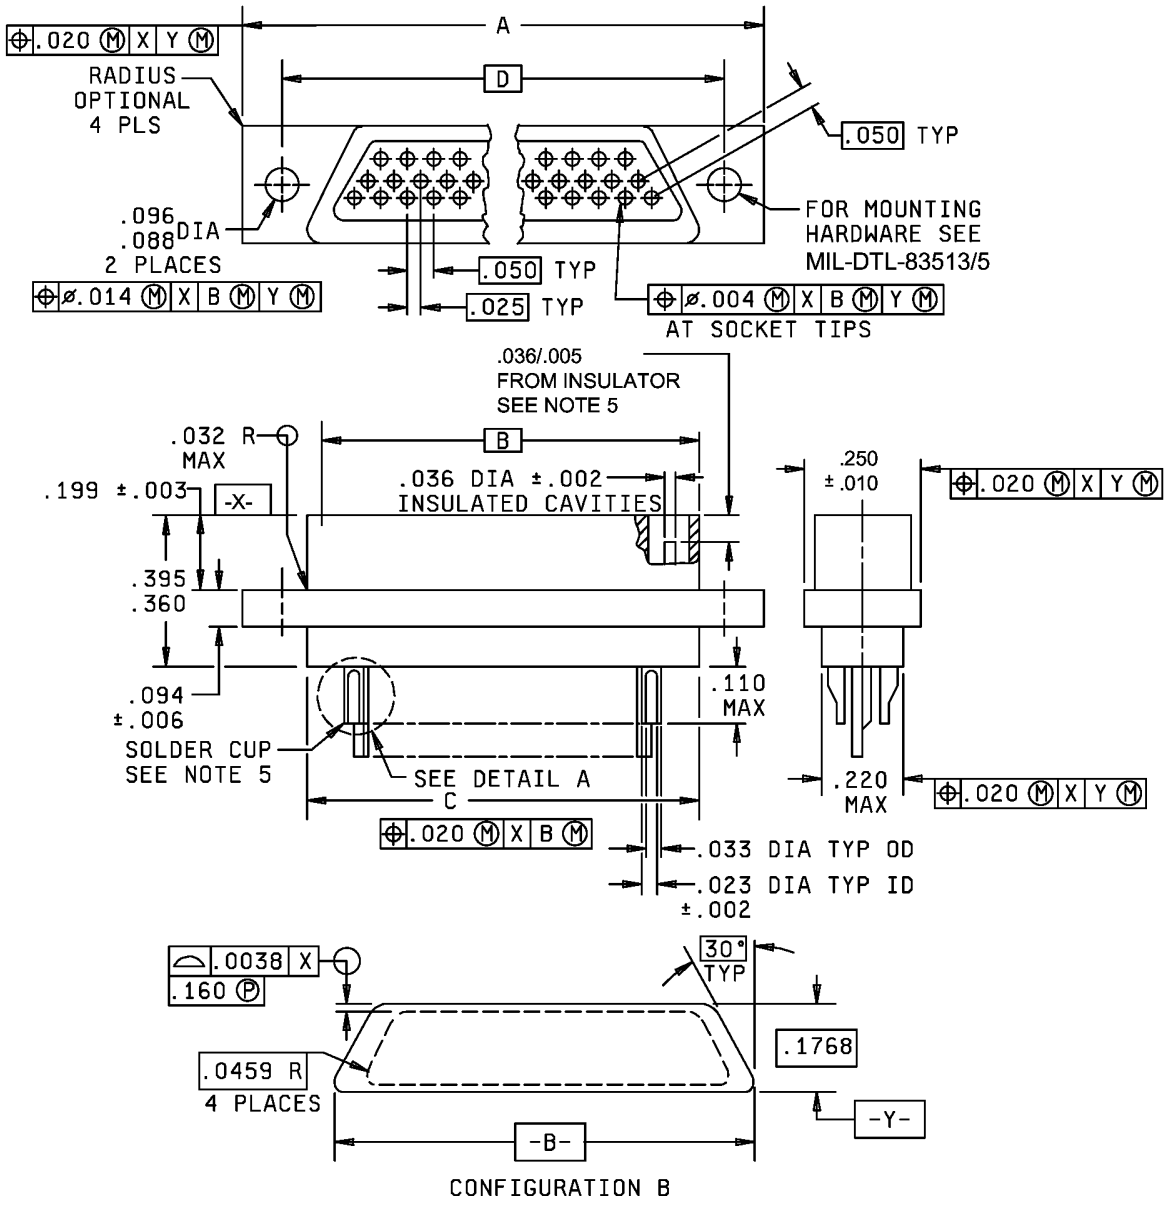


FIGURE 1. Connector, plug, .050 spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:27Z
Check the source to verify that this is the current version before use.

Number of cavities	A ±.010	B BSC	C +.010 -.018	D BSC
9	.778 (19.76)	.2918 (7.412)	.398 (10.11)	.565 (14.35)
15	.928 (23.57)	4418 (11.222)	.548 (13.92)	.715 (18.16)
21	1.07 (27.38)	.5918 (15.032)	.698 (17.73)	.865 (21.97)
25	1.178 (29.92)	.6918 (17.572)	.798 (20.27)	.965 (24.51)
31	1.328 (33.73)	.8418 (21.382)	.948 (24.08)	1.115 (28.32)
37	1.478 (37.54)	.9918 (25.192)	1.098 (27.89)	1.265 (32.13)
51	1.428 (36.27)	.9418 (23.922)	1.048 (26.62)	1.215 (30.86)


Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.0019	0.048	.014	0.36	.036	0.91	.088	2.24	.1342	3.409	.191	4.85
.002	0.05	.018	0.46	.045	1.14	.0884	2.245	.135	3.43	.200	5.08
.0038	0.097	.023	0.58	.0452	1.148	.093	2.36	.137	3.48	.208	2.08
.004	0.10	.025	0.64	.0459	1.166	.094	2.39	.154	3.91	.220	5.59
.005	0.13	.027	0.69	.050	1.27	.095	2.41	.179	4.39	.250	6.35
.006	0.15	.032	0.81	.0669	1.669	.110	2.79	.1772	4.501	.340	8.64
.010	0.25	.033	0.84	.070	1.78	.1138	2.89	.180	4.57	.375	9.52

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm).
4. Metric equivalents are in parentheses or columns.
5. Solder cup will accept size 26 AWG maximum wire.

FIGURE 1. Connector, plug, .050 spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:27Z
Check the source to verify that this is the current version before use.

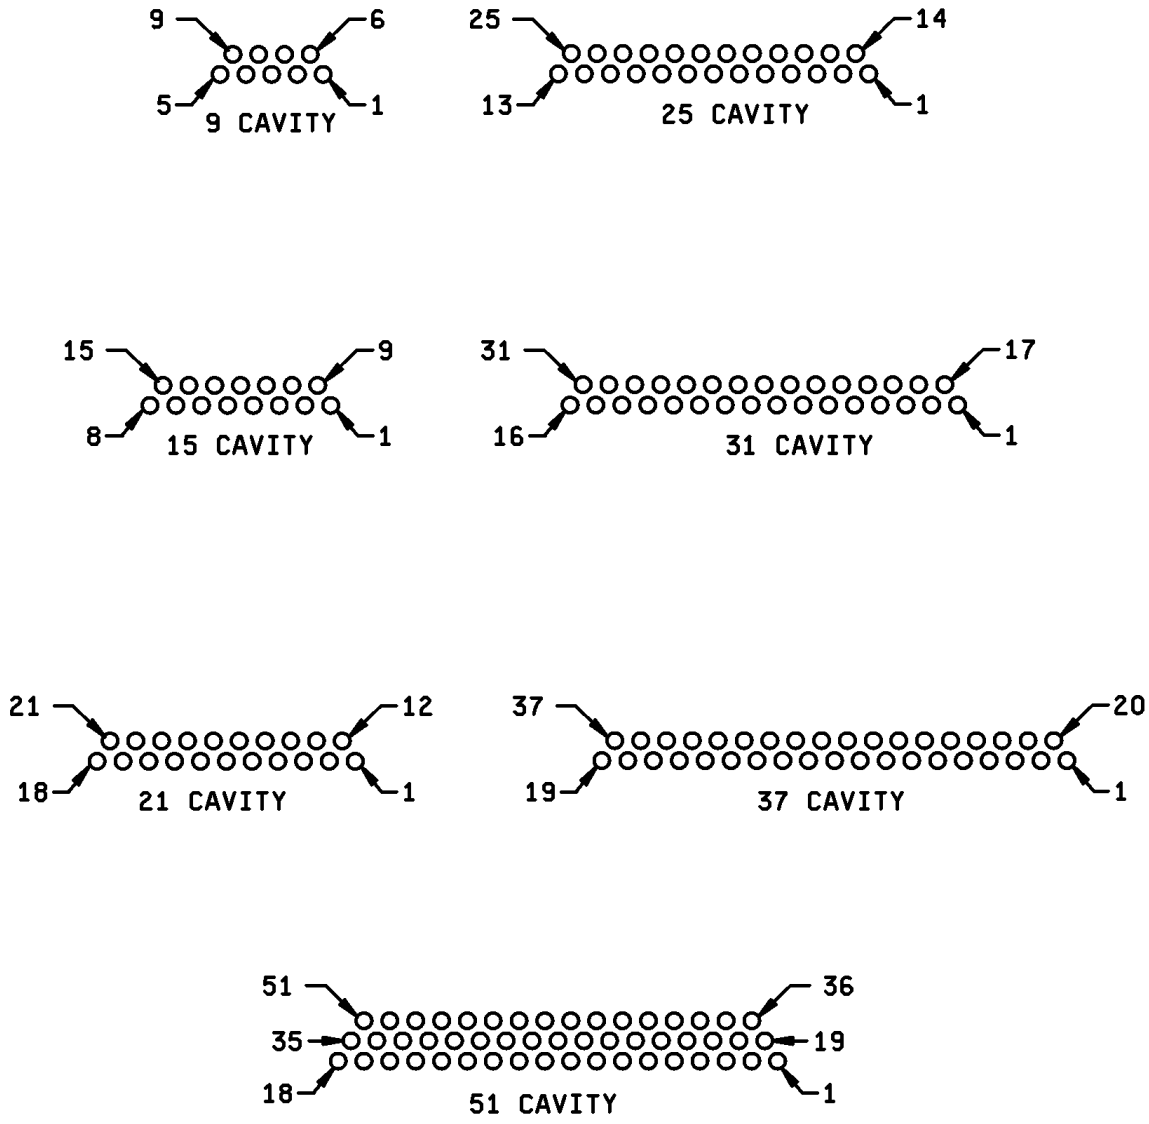

NOTES:
1. Engaging face of pin insert shown.
2. Cavity identification numbers are for reference only and do not appear on part.

FIGURE 2. Insert arrangement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1. This specification sheet describes the pin side of a rectangular plastic shell connector. This connector uses reverse gender contact, i.e., the live pin recessed in the insulator with the static socket protruding from a shrouded interface.

Material and finish:

Shell: The requirements for shell materials shall be in accordance with MIL-DTL-83513.

Contact identification: See figure 2 for contact layout identification.

Contact connection: The pin contact (being recessed in the insulator) is normally connected to the live side of the circuit.

Current rating, maximum: 3 amperes per contact.

Mounting and mating hardware: Mounting hardware is to be ordered separately. For insert arrangements A through G, use MIL-DTL-83513/5, configurations A and B. For insert arrangement H, use MIL-DTL-83513/5, configuration C.

Mating receptacle: Shall conform to MIL-DTL-83513/7 or MIL-DTL-83513/9.

Example of Part or Identifying Number (PIN):

M83513/06 - A

M83513/06: Specification sheet number

A: Insert arrangement (see figure 2)

A = 9
B = 15
C = 21
D = 25
E = 31
F = 37
G = 51

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA - NA
DLA - CC

Review activities:
Army - AT, MI
Navy - AS, CG, MC, SH
Air Force - 99

Preparing activity:
DLA - CC

(Project: 5935-4310-006)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:27Z
Check the source to verify that this is the current version before use.