DISTRIBUTION STATEMENT A **Approved for public release; distribution is unlimited**

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

REVIEWER ACTIVITIES
DLA-IS

USER ACTIVITIES
ARMY-CR,MI

DD FORM 1426 **672-1** (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5310-1572

PA NAVY-AS	INTERNATIONAL INTEREST
Other Cust ARMY-AV AIR FORCE-11	
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES NAS 687, NAS 1032 (IN PART)

MILITARY STANDARD

MS21062

PAGE 1 OF 3

FED SUP CLASS 5310

Ⓔ ENTIRE STANDARD REVISED

TITLE
NUT, SELF-LOCKING, PLATE, ONE LUG, FLOATING, LOW HEIGHT, CRES 125 KSI FTU, 450° & 800°F

CONFIGURATION OF NUT OPTIONAL WITHIN THE LIMITATIONS IMPOSED BY DIMENSIONS AND REQUIREMENTS AS SPECIFIED HEREIN

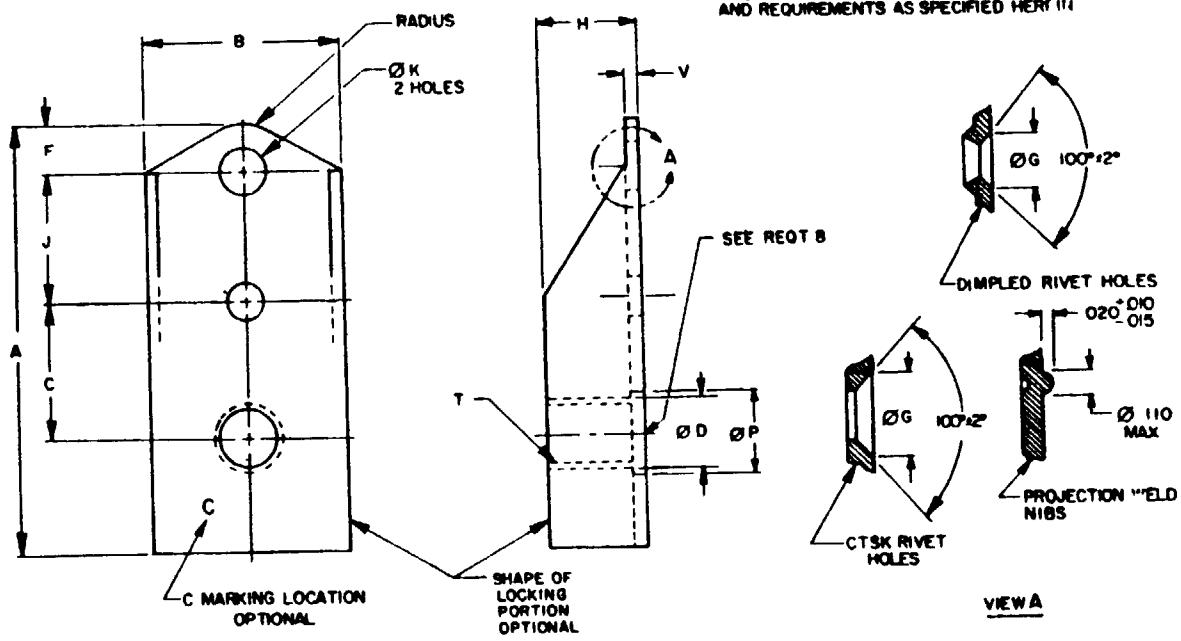


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBERS 450°F PLAIN HOLES	450°F CTSK OR DIMPLED HOLES	450°F WELDING PROJECTIONS	800°F PLAIN HOLES	800°F CTSK OR DIMPLED HOLES	800°F WELDING PROJECTIONS	T THREAD SIZES	A MAX	B MAX	B MIN	C ±.005	ØD MIN	F MIN	ØG ±.010	W MAX	J ±.002	Ø W ±.005 -.000	Ø P MAX	Ø P MIN	V MAX	AXIAL STRENGTH LBS/MIN	WEIGHT LBS/100
L04	L04R	L04W	-04	-04R	-04W	1/2-40 UNJC-3B	1.051	.422	.290	.344	—	.100	.200	.175	.312	.098	.270	.172	.032	750	52
L06	L06R	L06W	-06	-06R	-06W	13/16-32 UNJC-3B	1.051	.422	.290	.344	—	.100	.200	.203	.312	.098	.270	.198	.032	1 110	53
L08	L08R	L08W	-08	-08R	-08W	1/4-32 UNJC-3B	1.051	.422	.290	.344	.148	.100	.200	.250	.312	.098	.270	.224	.032	1 720	54
L3	L3R	L3W	-3	-3R	-3W	3/16-32 UNJF-3B	1.051	.422	.290	.344	.194	.100	.200	.250	.312	.098	.270	.250	.032	2,460	56
L4	L4R	L4W	-4	-4R	-4W	1/4-28 UNJF-3B	1.106	.531	.350	.500	.254	.100	.200	.281	.312	.098	.310	.310	.032	4 580	1 00
L5	L5R	L5W	-5	-5R	-5W	5/16-24 UNJF-3B	1.396	.641	.412	.500	.317	.125	.230	.328	.312	.130	.392	.372	.045	7 790	1 44
L6	—	L6W	-6	—	-6W	3/8-24 UNJF-3B	1.422	.703	.656	.500	.380	.125	.230	.479	.312	.130	.487	.418	.075	11 410	2 00
L8	—	L8W	-8	—	-8W	1/2-20 UNJF-3B	1.800	.859	.796	.625	.504	.125	.230	.595	.500	.161	.550	.500	.075	1 4 0	2 50

1/ MINIMUM "W" NOT SPECIFIED, LIMITED ONLY BY STRENGTH REQUIREMENTS OF SPECIFICATION
2/ DIMPLED RIVET HOLE TOLERANCE FOR Ø"K" IS +.015 -.000

APPROVED 23 JUL 64 REVISED Ⓔ 30 SEP 87

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

1 MATERIAL CORROSION RESISTANT STEEL, TYPE A286, (UNS S66286) IN ACCORDANCE WITH AMS5525, AMS5732 OR AMS5737

2 FINISH ONLY 800°F NUTS SILVER PLATE ALL THREADED SURFACES OF NUT ELEMENT IN ACCORDANCE WITH AMS 2410 THREADS SHALL SHOW COMPLETE COVERAGE SILVER PLATING ON ALL OTHER SURFACES OPTIONAL TARNISHING OR DISCOLORATION OF SILVER NOT CAUSE FOR REJECTION

3 LUBRICANT ONLY 450°F NUTS DRY FILM LUBRICANT IN ACCORDANCE WITH MIL-M-25027

4. DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M

5. HARDNESS. 49HRC, MAX

6 THREADS THREADS BEFORE LUBRICATION IN ACCORDANCE WITH MIL-S-8879.

7 SURFACE TEXTURE: SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED, SHALL NOT EXCEED 125 MICROINCHES, IN ACCORDANCE WITH ANSI B46.1.


8. COUNTERBORE/COUNTERSINK ON SIZE .164 AND LARGER, THREAD RELIEF SHALL BE 062 MINIMUM, ON SIZE 138 AND SMALLER, COUNTERSINK OR RADIUSED WITHIN "P" DIAMETER.

9 PERFORMANCE SEE PROCUREMENT SPECIFICATION, EXCEPT 450°F DRY FILM LUBRICATED NUTS LIMITED TO FIVE REUSE CYCLES.

10. FLOAT OF NUT PORTION. FLOAT OF NUT PORTION OF ASSEMBLY SHALL NOT BE LESS THAN .030 RADIALLY FROM CENTERED POSITION NUT ELEMENT SHALL BE CAPABLE OF ENGAGEMENT WITH BOLT IN THE MAXIMUM MISALIGNED POSITION.

11 PART NUMBER. THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE: MS21062L4K



MS21062L4K INDICATES NUT, SELF-LOCKING, PLATE, ONE LUG, FLOATING, LOW HEIGHT, CRES, 125 KSI Ftu, 450°F; DRY FILM LUBRICATION, 250-28 UNJF-3B, COUNTERSUNK OR DIMPLED HOLES

NOTES

1. ALL DIMENSIONS ARE IN INCHES

2 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

3 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

4. DESIGN AND USAGE LIMITATIONS THESE NUTS ARE DESIGNED TO DEVELOP THE TENSILE STRENGTH OF BOLTS AND SCREWS WITH AN ULTIMATE TENSILE STRENGTH OF 125 KSI BASED ON THE CROSS SECTION AREA AT THE BASIC ROOT DIAMETER OF THE THREADS THESE NUTS ARE DESIGNED TO BE USED ON 3A EXTERNAL THREADS THESE NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS33588 ONLY NUTS FOR WHICH THERE ARE QUALIFIED PRODUCTS LISTED ON QPL 25027 SHALL BE USED

APPROVED 23 JUL 64 REVISED (E) FOR CHANGES SEE PAGES 1,2 AND 3

USER ACTIVITIES
ARMY-CR, MI

REVIEWER ACTIVITIES
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

PA NAVY-AS Owner Cust ARMY-AV AIR FORCE-11	INTERNATIONAL INTEREST	TITLE NUT, SELF-LOCKING, PLATE, ONE LUG, FLOATING, LOW HEIGHT, CRES, 125 KSI FTU, 450°F & 800°F	MILITARY STANDARD MS 21062
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES NAS 687, NAS 1032 (IN PART)		PAGE 2 OF 3

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:26Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5310

INTERCHANGEABILITY RELATIONSHIP

MS21062 NUTS CAN UNIVERSALLY REPLACE NAS687 AND NAS1032 NUTS OF LIKE MATERIAL, THREAD SIZE, LUBRICANT (DRY FILM OR SILVER PLATE) RIVET SPACING AND FASTENING METHOD (PLAIN RIVET HOLES; DIMPLED OR COUNTERSUNK RIVET HOLES OR PROJECTION WELDING), BUT THESE NAS687 AND NAS1032 NUTS CANNOT UNIVERSALLY REPLACE MS21062 NUTS

INTERCHANGEABILITY TABLE

CANCELLED PART NUMBERS		SUBSTITUTIVE PART NUMBERS
NAS687C04	NAS1032C04	MS21062-04
NAS687C04K	NAS1032C04K	MS21062-04K
—	NAS1032C04W	MS21062-04W
NAS687C04M	—	MS21062L04
NAS687C04MK	—	MS21062L04K
—	—	MS21062L04W
NAS687C06	NAS1032C06	MS21062-06
NAS687C06K	NAS1032C06K	MS21062-06K
—	NAS1032C06W	MS21062-06W
NAS687C06M	—	MS21062L06
NAS687C06MK	—	MS21062L06K
—	—	MS21062L06W
NAS687C08	NAS1032C08	MS21062-08
NAS687C08K	NAS1032C08K	MS21062-08K
—	NAS1032C08W	MS21062-08W
NAS687C08M	—	MS21062L08
NAS687C08MK	—	MS21062L08K
—	—	MS21062L08W
NAS687C3	NAS1032C3	MS21062-3
NAS687C3K	NAS1032C3K	MS21062-3K
—	NAS1032C3W	MS21062-3W
NAS687C3M	—	MS21062L3
NAS687C3MK	—	MS21062L3K
—	—	MS21062L3W
NAS687C4	NAS1032C4	MS21062-4
NAS687C4K	NAS1032C4K	MS21062-4K
—	NAS1032C4W	MS21062-4W
NAS687C4M	—	MS21062L4
NAS687C4MK	—	MS21062L4K
—	—	MS21062L4W
NAS687C5	NAS1032C5	MS21062-5
NAS687C5K	NAS1032C5K	MS21062-5K
—	NAS1032C5W	MS21062-5W
NAS687C5M	—	MS21062L5
NAS687C5MK	—	MS21062L5K
—	—	MS21062L5W
—	NAS1032C6	MS21062-6
—	NAS1032C6W	MS21062-6W
—	NAS1032C8	MS21062-8
—	NAS1032C8W	MS21062-8W

USER ACTIVITIES
ARMY—CR, MI

REVIEWER ACTIVITIES
DLA — 13

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 23 JUL 64 REVISED (E) FOR CHANGES SEE PAGES 1,2 AND

P A NAVY-AS Other Cust ARMY-AV AIR FORCE-11	INTERNATIONAL INTEREST	TITLE NUT, SELF-LOCKING, PLATE, ONE LUG, FLOATING, LOW HEIGHT, CRES, 125KSI FTU, 450°F & 800°F	MILITARY STANDARD MS21062
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES NAS 687, NAS 1032 (IN PART)		PAGE 3 OF 3

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310-1572

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:26Z
Check the source to verify that this is the current version before use.