
THIS SPECIFICAT APPROVED FOR USE BY all Departments and Agencies
of the Dep. nt of Defense

REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION T AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS IED IN SOLICITATION MIL-S-8834

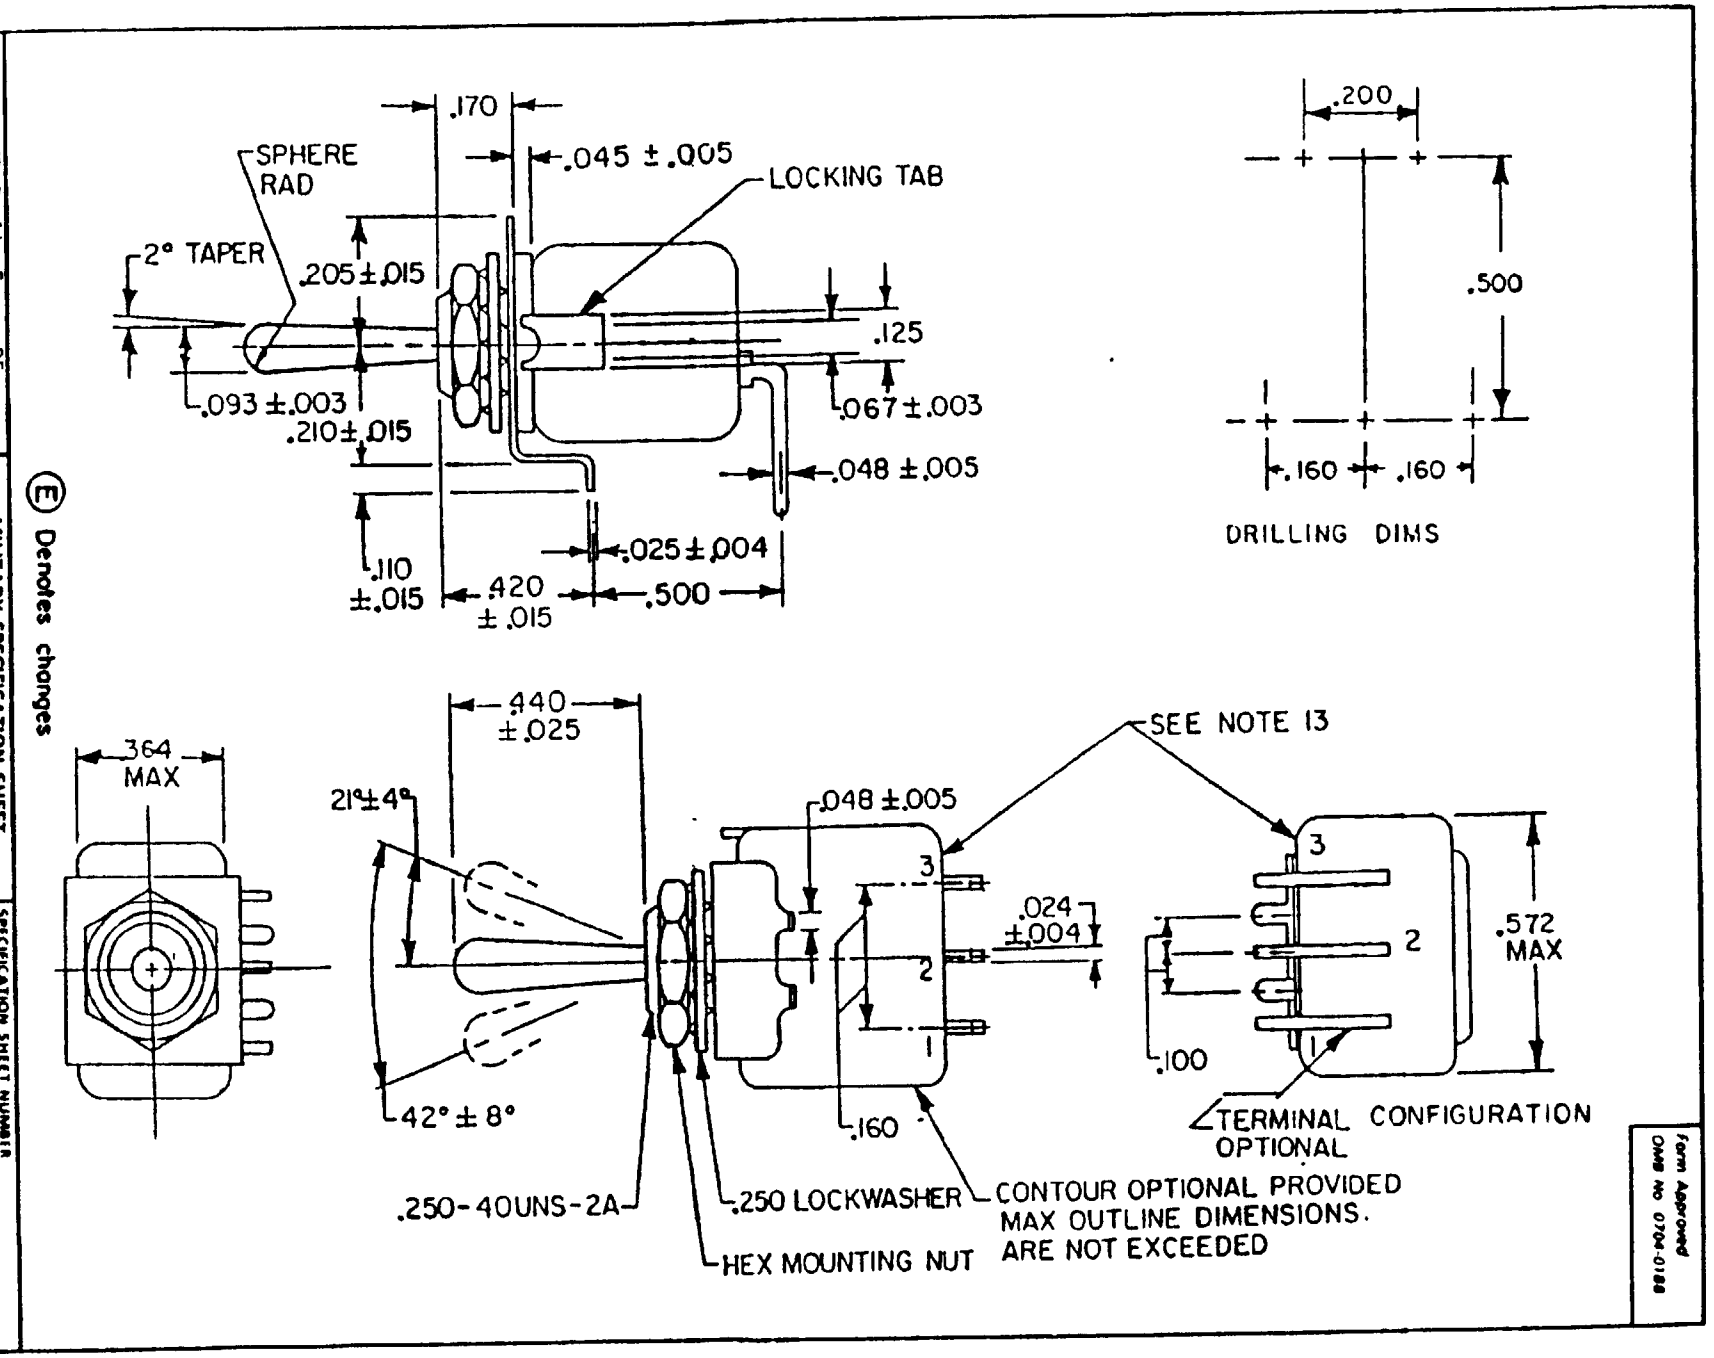

Ⓔ Denotes changes

PREPARING ACTIVITY Air Force-85
CUSTODIANS ARMY
NAVY AS
AIR FORCE
DLA
REVIEW Air Force-11, 99 Navy-EC
USER
PROJECT NUMBER 5930-1454-06
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

MILITARY SPECIFICATION SHEET
TITLE SWITCH, TOGGLE, POSITIVE BREAK, MINIATURE, TOGGLE SEALED, SINGLE POLE, PRINTED CIRCUIT BOARD TERMINALS, RIGHT ANGLE MOUNT

SPECIFICATION SHEET NUMBER
MS21433E 4 Sep 1991
SUPERSEDING MS21433D 15 Dec 1989
AMSC N/A FSC 5930

Page 1 of 3

DD Form 672, MAY 88

Form Approved OMB No. 0704-0188

Source: https://assist.dla.mil -- Downloaded: 2024-10-23T14:39Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

Form Approved
OMB No. 0704-0188

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.045	1.14	.125	3.18	.250	6.35
.004	0.10	.048	1.22	.160	4.06	.364	9.25
.005	0.13	.067	1.70	.170	4.32	.420	10.67
.015	0.38	.093	2.36	.200	5.08	.440	11.18
.024	0.61	.100	2.54	.205	5.21	.500	12.70
.025	0.64	.110	2.79	.210	5.33	.572	14.53

NOTES.

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) on decimals and ±5° on angles.
4. For hardware detail specification see appendix of MIL-S-8834.
5. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation shall form a part of this standard to the extent specified herein.
7. Shock: Method I and method II (high impact). The switches shall be rigidly mounted to the shock test equipment by means of their terminals and mounting tab. The switch shall be electrically and mechanically operative at the conclusion of the test and there shall be no mechanical transfer during the test.
8. Terminals: Gold plated.
9. Weight. 6.15 grams, maximum.
10. Strength of terminals: Terminals shall be subjected to a five-pound pull for 5 to 10 seconds with the long dimension of the terminal contact vertical. The force shall be applied to the terminal at a point .06 inch (1.5 mm) below the bottom of the switch base, and in a direction parallel to the axis of the toggle lever in its center position. Two outboard terminals shall be tested. However, a terminal shall be tested only once in one direction.
11. Altitude: 50,000 feet.
12. Strength of actuator. Lever pivot and lever stop 6 pounds.
13. Terminals need not be marked. Terminal identification is shown for reference purposes only.
14. Mounting bracket: Brass, tin plated, or coated.
15. For hardware detail specifications, see appendix of MIL-S-8834.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T14:39Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION ET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS IFIED IN SOLICITATION

Detail requirements:

MS dash no.	Circuit made between terminals as indicated with the toggle lever in these positions: (a)			Current capacity in amperes						Low current level switching 5 mV
				Resistive load			Inductive load			
	Opposite locking tab side	Center position	Locking tab side (d)	28 V dc	115 V 60 Hz ac	115 V 400 Hz ac	28 V dc	115 V 60 Hz ac	115 V 400 Hz ac	
-211		off	on 1-2							
-221	on 2-3	none	off	5	2	3	(b) 1	1	2	(c) 25 µA
-231			on 1-2							
-241			none							
-271	mom-on 2-3		mom-on							
-281	none	off	1-2							
-311	on 2-3									
-321 (e) (f)	none	on 2-3								

SEE NOTE (f)

(E)
(a) Direction of movement of internal mechanism is opposite to the direction of the toggle movement.
(b) With time constant of .020 ±.002 seconds.
(c) Contact resistance not to exceed 50m during life, low current level switching.
(d) Non-functional terminals shall not be supplied.
(e) Dielectric withstanding voltage: 1200 V rms at sea level (center on circuits).
(f) Delayed action of the switch toggle lever may cause circuit to close or open before snap action mechanism trips.

PREPARING ACTIVITY: Air Force-85
CUSTODIANS: ARMY; NAVY-AS; AIR FORCE; DLA
REVIEW: Air Force-11, 99 Navy-EC
USER
PROJECT NUMBER 5930-1454-06
DISTRIBUTION STATEMENT

MILITARY SPECIFICATION SHEET
TITLE: SWITCH, TOGGLE, POSITIVE BREAK, MINIATURE, TOGGLE SEALED, SINGLE POLE, PRINTED CIRCUIT BOARD TERMINALS, RIGHT ANGLE MOUNT

SPECIFICATION SHEET NUMBER: MS21433E
SUPERSEDING: MS21433D
15 Dec 1989
AMSC N/A
FSC 5930

DD Form 672, MAY 88
Page 3 of 3

Form Approved OMB No. 0704-0188

Source: https://assist.dla.mil - Downloaded: 2026-02-23 14:39Z
Check the source to verify that this is the current version before use.