INCH-POUND

MS23747F
w/AMENDMENT 1
10 April 2024
SUPERSEDING
MS23747F
1 April 2009

MILITARY SPECIFICATION SHEET

GLAND, CABLE SEALING, CLASS L

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-22992.

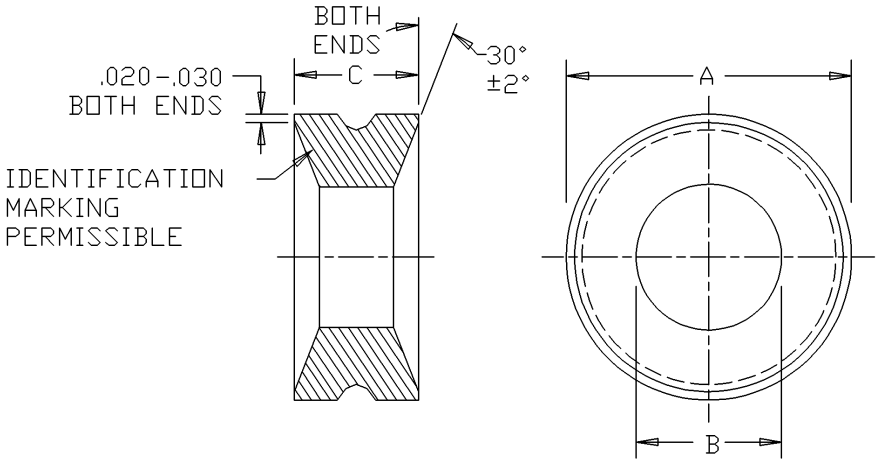


FIGURE 1. Configuration and dimensions.

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:46Z
Check the source to verify that this is the current version before use.

MS Part or Identifying Number (PIN)	Arrangement Number	A dia + .000 - .020	B dia + .020 - .000	C	Min Cable diameter Ref.
MS23747-1	28-03,-05,-06 32-02,-04	1.805	.969	1.034	.844
-2	28-13, 32-03 32-05,32-12	1.805	1.130	1.034	1.005
-3	32-07	1.805	1.260	1.034	1.135
-4	28-02,28-04	1.805	.844	1.034	.719
-5	44-02,44-04	2.242	1.312	1.160	1.187
-6	44-06	2.242	1.375	1.160	1.250
-7	52-02	2.927	1.703	1.284	1.558
-8	52-06	2.927	1.797	1.284	1.652
-9	Cancelled – use MS23747-18				
-10	Cancelled – no superseding numbers				
-11	Cancelled – no superseding numbers				
-12	28-07, 28-12 32-06	1.805	1.047	1.034	.922
-13	32-13	1.805	1.342	1.034	1.217
-14	44-03, 44-05	2.242	1.438	1.160	1.313
-15	44-12	2.242	1.516	1.160	1.391
-16	44-13	2.242	1.672	1.160	1.547
-17	48-13	2.680	2.000	1.222	1.855
-18	52-12	2.927	2.328	1.284	2.183
-19	52-13	2.927	2.453	1.284	2.308
-20	44-51	2.242	1.734	1.160	1.609
-21	44-52	2.242	1.562	1.160	1.437
-22	44-56	2.242	1.150	1.160	1.025

FIGURE 1. Configuration and dimensions – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:46Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.020	.51	1.391	35.33
.719	18.26	1.437	36.50
.844	21.44	1.438	36.53
.922	23.42	1.516	38.51
.969	24.61	1.547	39.29
1.005	25.53	1.558	39.57
1.025	26.04	1.562	39.67
1.034	26.26	1.609	40.87
1.047	26.59	1.652	41.96
1.130	28.70	1.672	42.47
1.135	28.83	1.703	43.26
1.150	29.21	1.734	44.04
1.160	29.46	1.797	45.64
1.187	30.15	1.805	45.85
1.217	30.91	1.855	47.12
1.222	31.04	2.000	50.80
1.250	31.75	2.183	55.45
1.260	32.00	2.242	56.95
1.284	32.61	2.308	58.62
1.312	33.32	2.328	59.13
1.313	33.35	2.453	62.31
1.342	34.09	2.680	68.07
1.375	34.92	2.927	74.35

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ± 010.
4. Material is synthetic rubber in accordance with ASTM D2000.

FIGURE 1. Configuration and dimensions – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:46Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Reference documents. In addition to MIL-DTL-22992, this document references ASTM D2000.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - YD
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army – MI
Navy – AS, CG, MC, OS
Air Force – 19

(Project 5935-2024-121)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:46Z
Check the source to verify that this is the current version before use.