

FED. SUP CLASS
4730

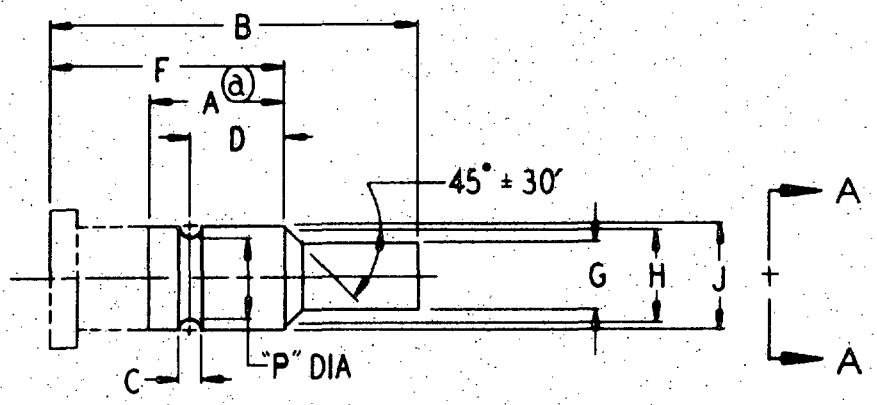

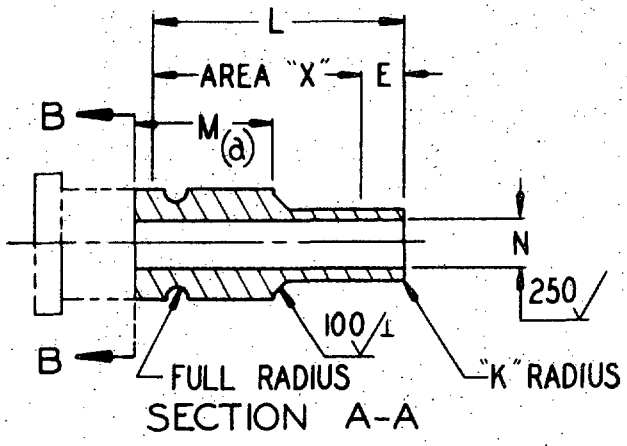

SECTION A-A

MATERIAL : CORROSION RESISTING STEEL : CLASS 304
CONDITION "A" SPECIFICATION QQ-S-763.
ALUMINUM ALLOY : 6061-T651
SPECIFICATION QQ-A-225/8.

FINISH : CORROSION RESISTING STEEL : PASSIVATE
PER MIL-F-27272.
ALUMINUM ALLOY : ANODIZE, SPECIFICATION
MIL-A-8625, TYPE II, DYE BLUE.

DRY-FILM LUBRICATE AREA "X" IN ACCORDANCE WITH MIL-L-8937. NO OVERSPRAY ALLOWED.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED : RADIUS OR BREAK ALL CORNERS .005 + .005 -.000. REMOVE ALL BURRS AND SLIVERS. SURFACE ROUGHNESS PER ANSI B46.1 - 1962 NOT TO EXCEED 125 AA . ALL DIAMETERS MUST BE CONCENTRIC WITHIN .005 TIR. (c)

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

APPROVED 1 Sep 61 Revised (A) 2 Jul 63 (B) 2 May 66 (C) 30 Jun 72

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,533,577; 3,044,163; 3,055,682)

User Activities:
Army-WC, ME, MI

Activities:
Army-AV
Navy-AS
Air Force-82

...ary standard is approved by the Department of Defense and is mandatory on all ...vices. Selection for all new engineering and design applications and for repetitive ... shall be made from this document.

P.A. Air Force-II	TITLE	MILITARY STANDARD
Other Cust Army-AV Navy-AS (c)	NIPPLE, STRAIGHT, SWIVEL FLANGE	MS27076
Procurement Specification MIL-F-27272	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 57 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DRAWN BY DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

FED. SUP. CLASS
4730

THIS IS A DESIGN STANDARD FOR MANUFACTURING PURPOSES, THE ITEM IS ONLY PROCURED AS AN INTEGRAL PART OF ADAPTER ASSEMBLIES.

ANY DESIGN TO THE LEFT OF PLANE B–B IS ACCEPTABLE PROVIDED THE NIPPLE IS OF ONE PIECE DESIGN, DIM'S "B" AND "F", THE MATERIALS SPECIFIED AND THE FABRICATION NOTES OF THIS STANDARD ARE MET.

(a) USE "A" DIM WHEN THE ADJACENT DIA TO THE LEFT OF PLANE B–B IS GREATER THAN "J" DIM. WHEN THE ADJACENT DIA IS EQUAL TO OR LESS THAN "J" DIM, "M" DIM. MAY BE USED IN PLACE OF "A" DIM.

NEXT ASSEMBLY MS27062

DASH NO.		A		B	C		"D" +.005 −.000		E		F
STEEL	ALUM			±.015			STEEL	ALUM			±.010
−6C	−6D	.617	MIN	1.797	.098	+.004 −.000	.385	.385	.32	±.12	1.197
−10C	−10D	.654		1.902			.420	.427	.35	±.15	1.252
−12C	−12D	.755		2.107	.128	+.005 −.000	.500	.500			1.432
−16C	−16D	.831		2.193			.545	.545	.39	±.19	1.463
−20C	−20D	.881		2.457			.565	.571	.48	±.28	1.522
−24C	−24D	1.035		2.605			.665	.665	.50	±.30	1.625

G +.000 −.005	H ±.005	J +.005 −.000	K		L		"M" MIN	N		P	
.431	.530	.616	.020	+.005 −.000	1.030	MIN	.583	.345	+.006 −.000	.497	±.005 −.000
.531	.625	.706		±.005	1.130		.620	.440		.586	
.655	.760	.826	.030		1.240		.720	.560		.674	+.008 −.000
.905	1.040	1.150			1.340		.796	.828		1.001	
1.156	1.275	1.405			1.570		.846	1.058		1.255	+.005 −.000
1.406	1.550	1.635	.035		1.720		1.000	1.282	+.005 −.000	1.490	

APPROVED 1 Sep 61 REVISED (C) FOR CHANGES SEE SHEET 1.

User Activities: Army – WC, ME, MI

Review Activities: Army – AV, Navy – AS, Air Force – 82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,533,567; 3,044,163; 3,05[illegible])

P.A. Air Force – 11 (C) Other Cust Army – AV, Navy – AS	TITLE: NIPPLE, STRAIGHT, SWIVEL FLANGE	MILITARY STANDARD MS 27076
Procurement Specification MIL-F-27272	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DRAWN BY _____ DATE _____

Source: https://assist.dla.mil -- Downloaded: 2026-03-15 15:15Z
Check the source to verify that this is the current version before use.