

Form Approved
OMB No. 0704-0188

THIS SPECIFICATION IS APPROVED BY THE DEPARTMENT OF THE AIR FORCE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-H-7195

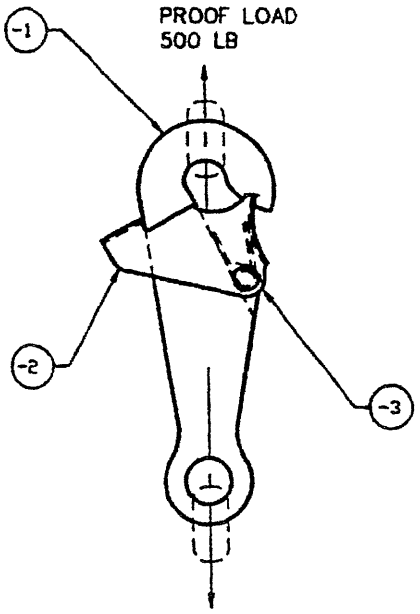

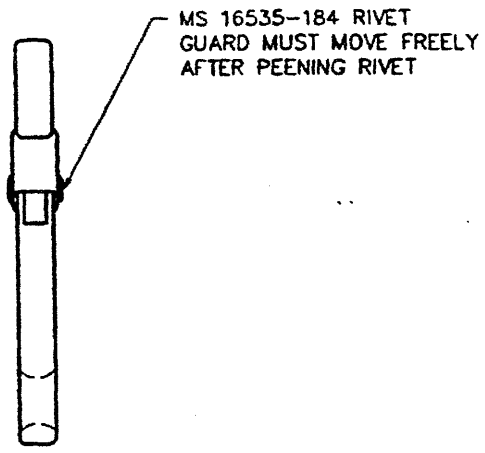

ASSEMBLY
PART NO. MS27756

PART NO.	NAME	QUANTITY	MATERIAL	REMARKS
-1	HOOK	1	ALUMINUM ALLOY OPTIONAL ALUMINUM ALLOY FORGING	QQ-A-225/6 TEMP-T4 OPTIONAL QQ-A-367, ALLOY NO. 2014-T4 CLASSIFICATION NO. II
-2	GUARD	1	STEEL	QQ-S-698, COND. 2
-3	SPRING	1	WIRE	ASTM A228

NOTES:

1. REMOVE ALL BURRS AND SHARP EDGES.
2. HOOK SHALL BE SUBJECTED TO PROOF LOAD OF 500 LBS., IN DIRECTION INDICATED BY THE ARROW.
3. GRAIN FLOW MUST BE ORIENTED TO THE DIRECTION OF PROOF LOAD SHOWN WHEN HOOK IS MANUFACTURED FROM ALUMINUM ALLOY FORGING.
4. FINISH - 1 HOOK, ANODIZE, MIL-A-8625.
5. FINISH - 2 GUARD AND -3 SPRING, ZINC COAT PER MIL-C-87115, CLASS 2, TYPE II.
6. DIMENSIONS IN INCHES UNLESS OTHERVISE, TOLERANCES: FRACTIONS ± 1/64, DECIMALS ± .010, ANGLES ± 1°.
7. END ITEM EXAMINATION:

   A. CRITICAL DIMENSIONS: AS SHOWN ON SHEET 2 DENOTED BY ※.
   B. CRITICAL FUNCTIONAL TEST: NONE

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) ENTIRE STANDARD REVISED

PREPARING ACTIVITY: 82 CUSTODIANS: ARMY- NAVY- AIR FORCE- 99 DLA- REVIEW: NAVY - AS USER: PROJECT NUMBER: 1670 - 0730	MILITARY SPECIFICATION SHEET TITLE SNAP HOOK, PARACHUTE LANYARD	SPECIFICATION SHEET NUMBER MS27756A 23 JUN 1993 SUPERSEDING MS27756 20 JUN 69 AMSC. N/A FSC. 1670
DISTRIBUTION STATEMENT A. APPROVE FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.		Page 1 of 2


DD Form 672, MAY 88 Previous editions are obsolete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:50Z
Check the source to verify that this is the current version before use.


Form Approved
OMB No. 0704-0188

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-H-7195


THIS SPECIFICATION IS APPROVED BY THE DEPARTMENT OF THE AIR FORCE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

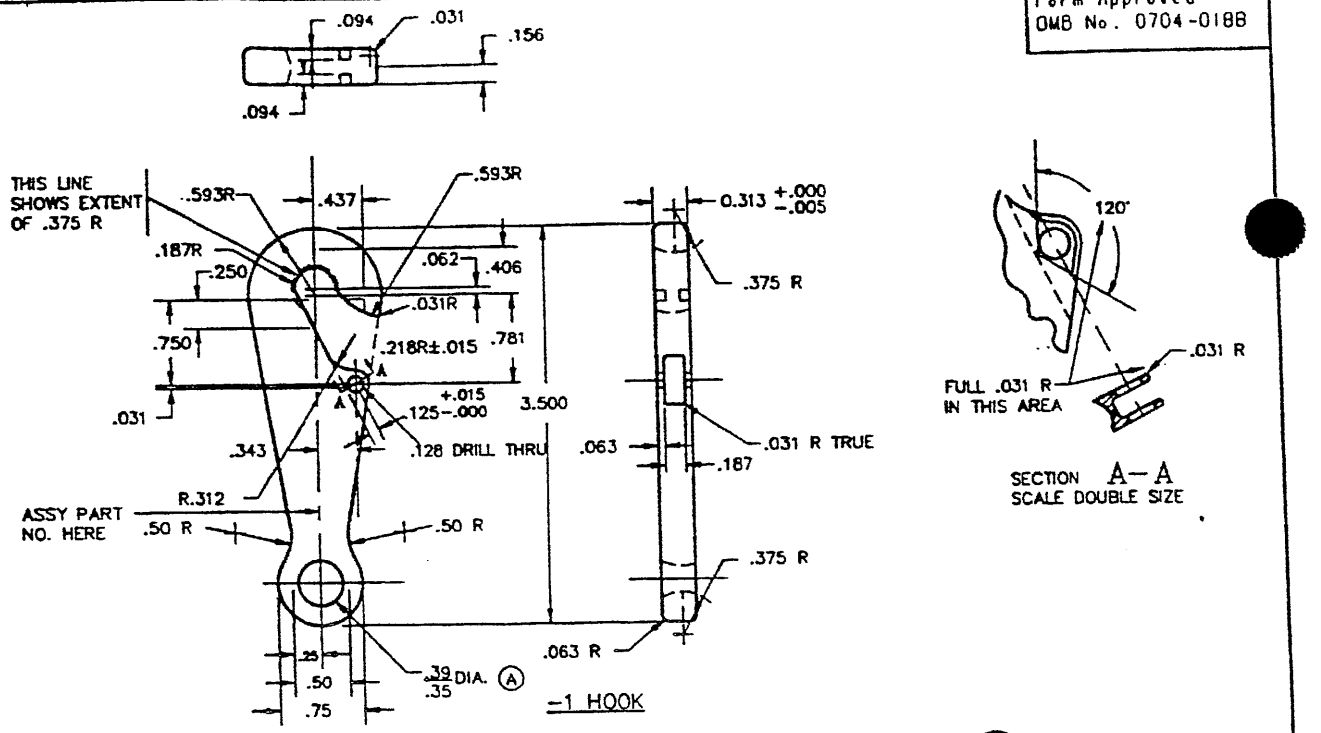


-1 HOOK

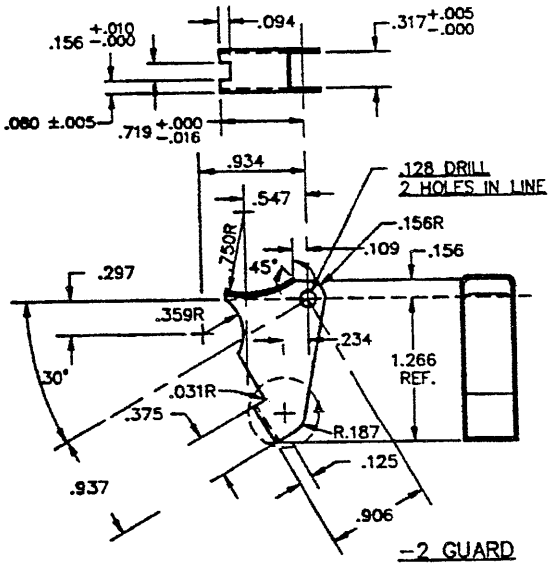

-2 GUARD

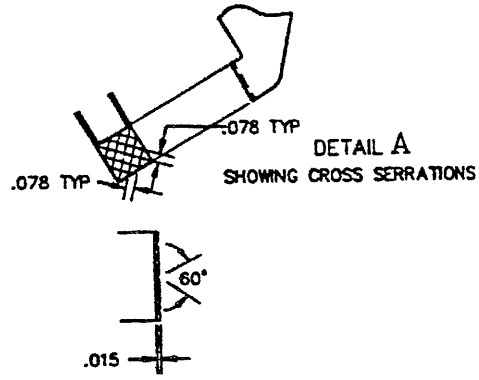

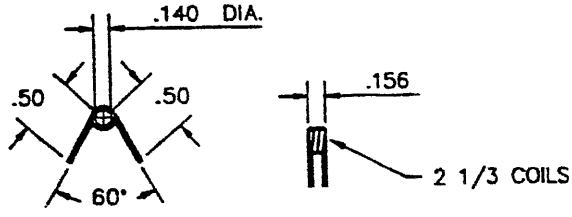

-3 SPRING

GUARD NOTES:

1. MATL STEEL, QQ-S-698, .0418 THICK COND. 2, DULL FINISH BEND RADII .050R ±.016
2. OPTIONAL- MAY BE BRAZED CONSTRUCTION PROVIDED COMPLETE GUARD CONFORMS TO THE DIM. SPECIFIED. BRAKE SHARP EDGES .010 MAX.

SPRING NOTES:

1. MATL-.036 WIRE, ASTM A228
2. HEAT SPRING 500° TO 550°F FOR 10 MINUTES AFTER FORMING

(A) ENTIRE STANDARD REVISED

PREPARING ACTIVITY: 82 CUSTODIANS: ARMY- NAVY- AIR FORCE- 99 DLA- REVIEW: NAVY - AS USER: PROJECT NUMBER: 1670 - 0730	MILITARY SPECIFICATION SHEET TITLE SNAP HOOK, PARACHUTE LANYARD	SPECIFICATION SHEET NUMBER MS 27756A JUN 1993 SUPERSEDING MS27756 20 JUN 69 AMSC. N/A FSC. 1670
DISTRIBUTION STATEMENT A. APPROVE FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.		Page 2 of 2

DD Form 672, MAY 88 Previous editions are obsolete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:50Z
Check the source to verify that this is the current version before use.