FED. SUP CLASS
5975

REVIEWER SYMBOLS:
ARMY - AV, MI, EL
NAVY - EC
USAF - 99

USER SYMBOLS:
ARMY -
NAVY - SH, OS
USAF - 17

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

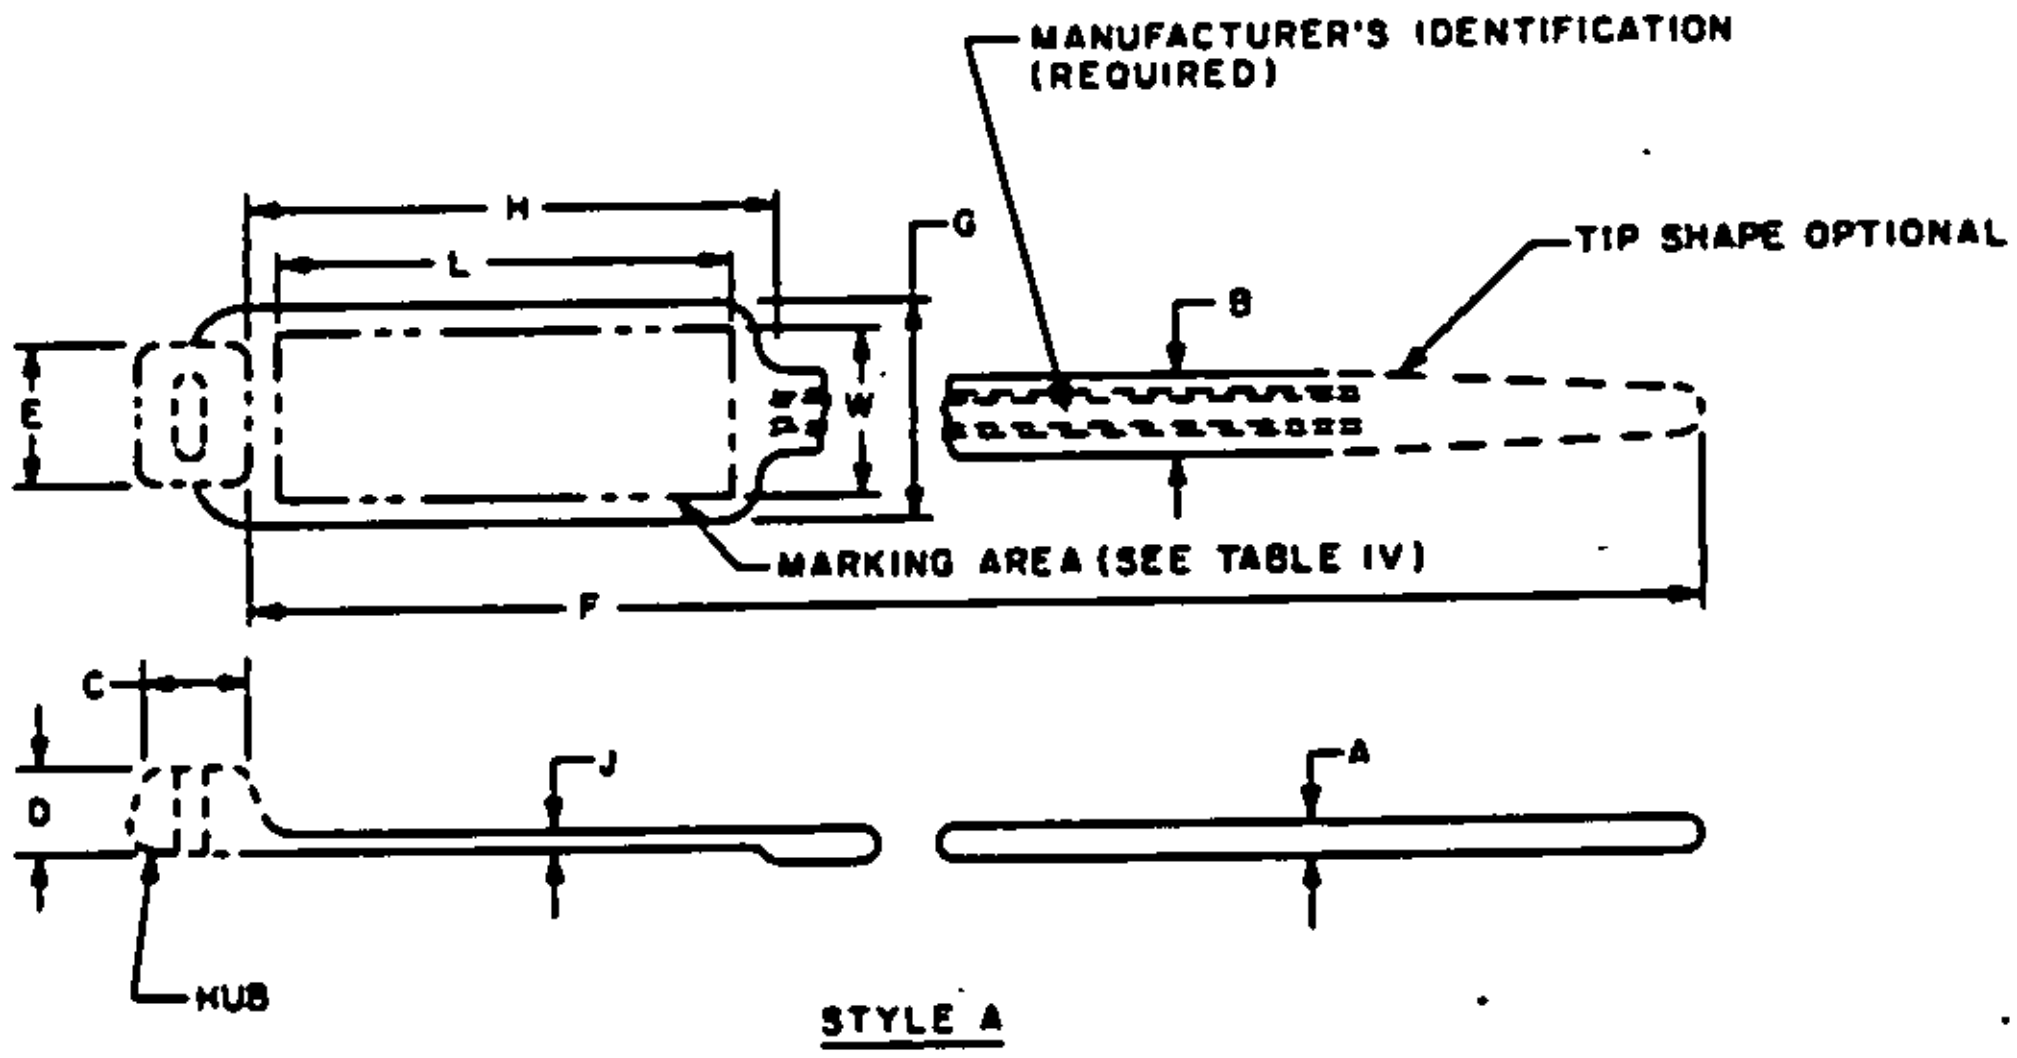
MANUFACTURER'S IDENTIFICATION (REQUIRED)
TIP SHAPE OPTIONAL
H
L
G
B
E
W
MARKING AREA (SEE TABLE IV)
F
C
D
J
A
HUB

STYLE A

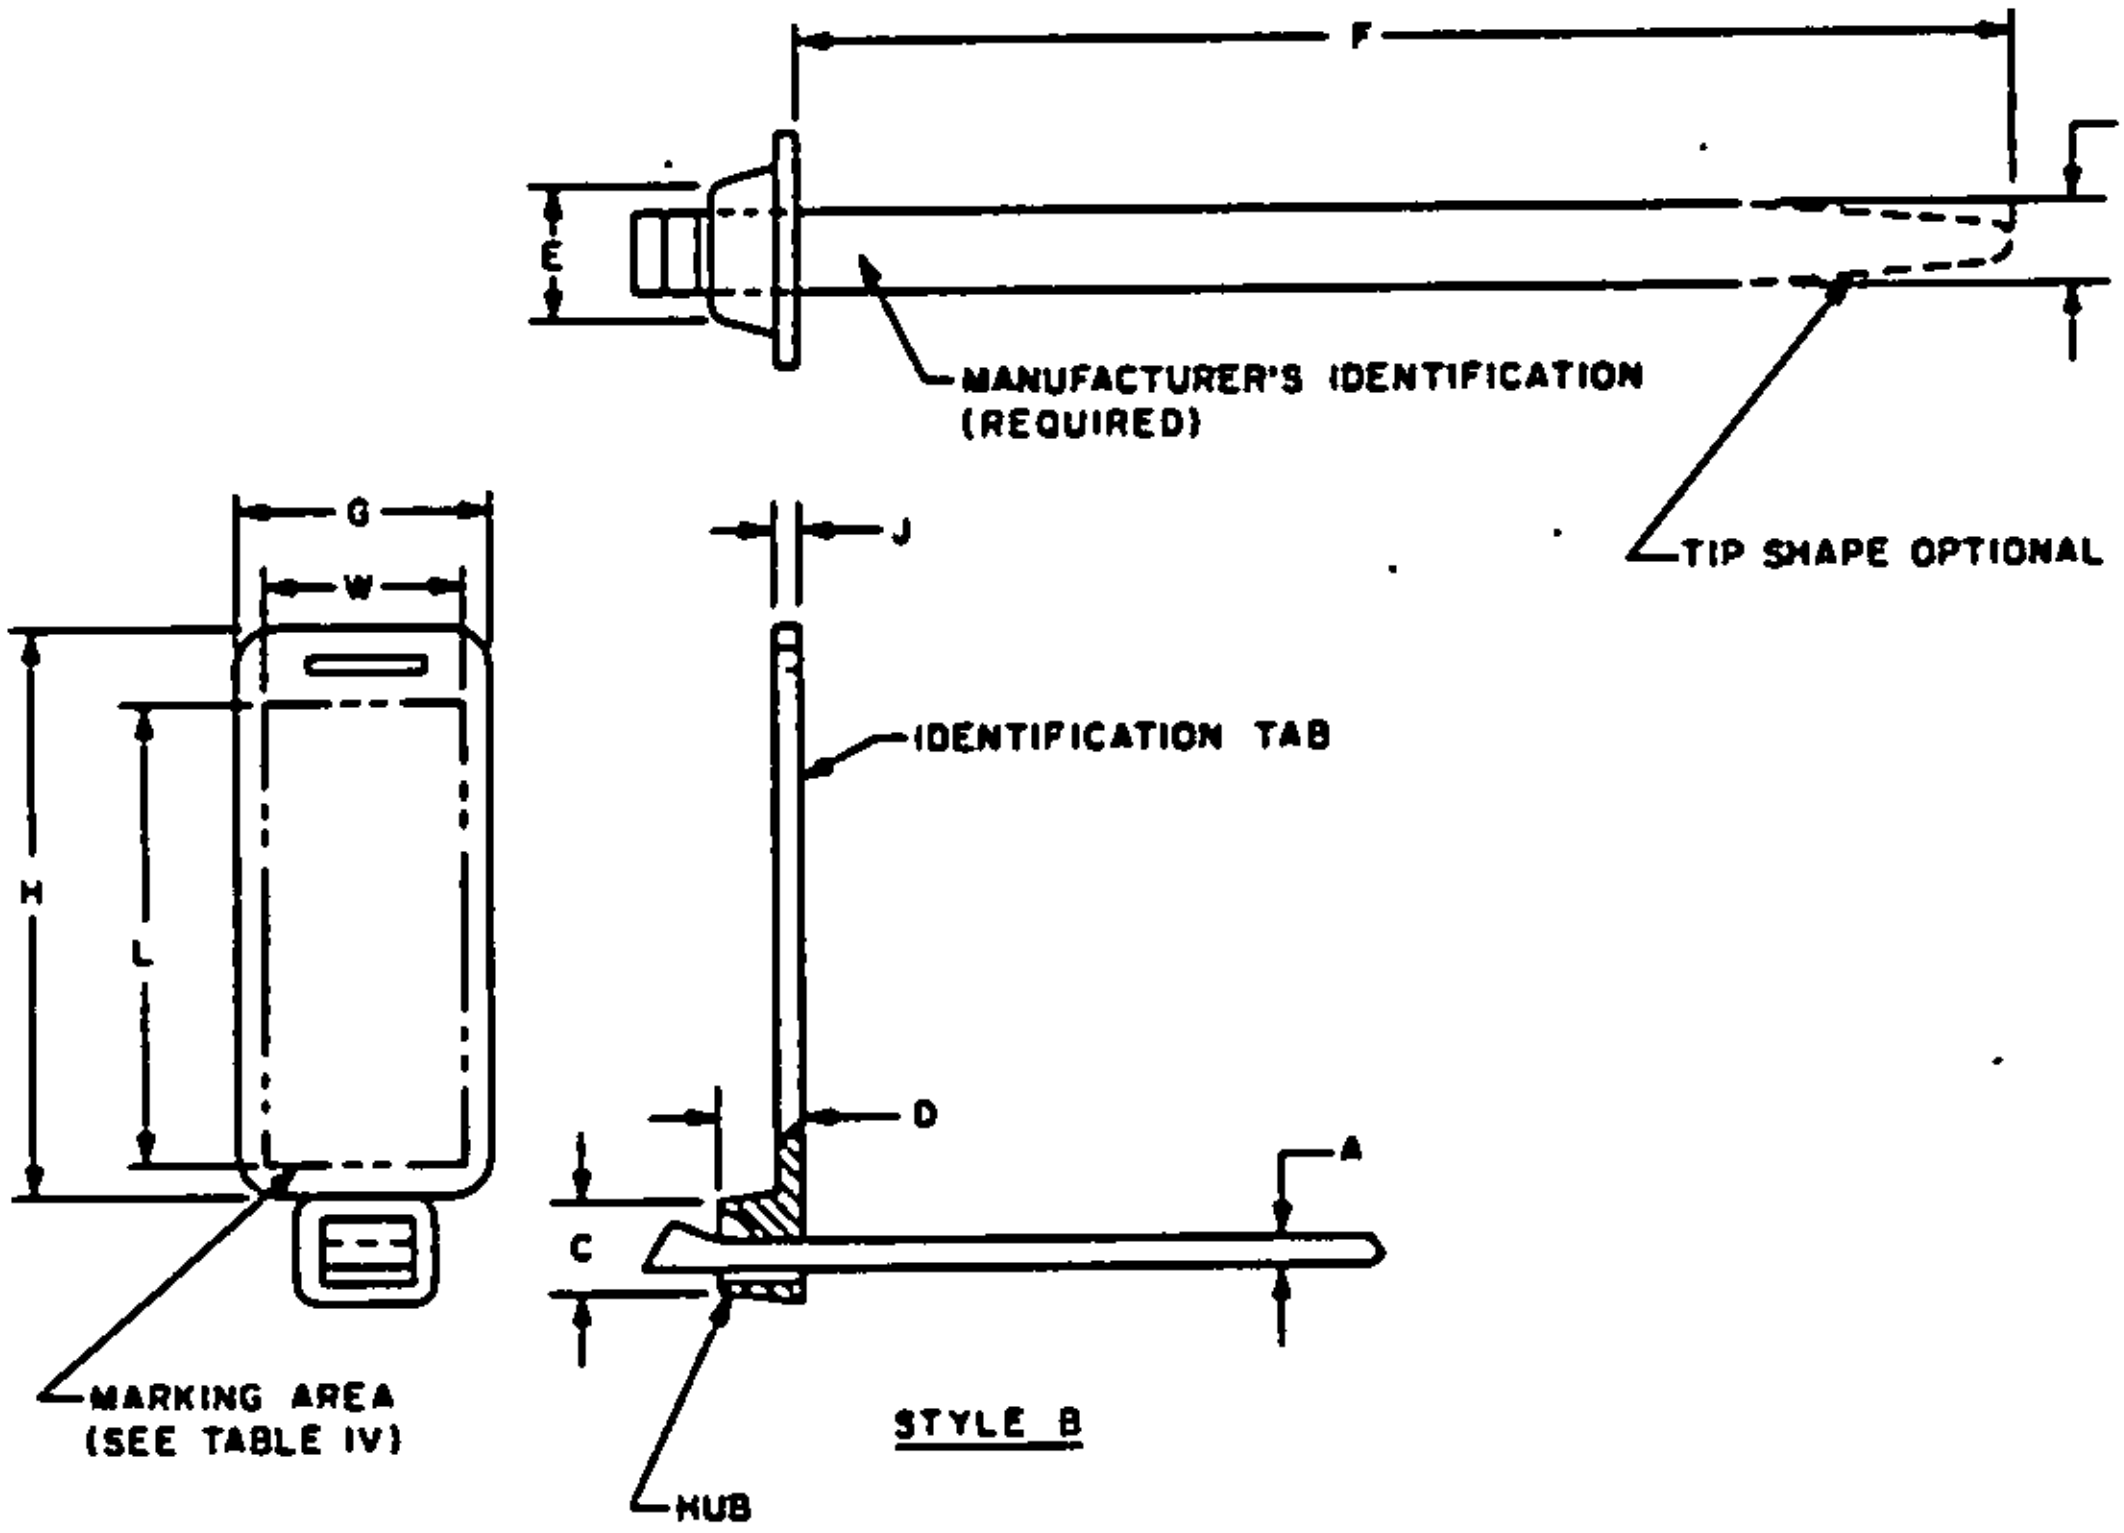
F
B
E
MANUFACTURER'S IDENTIFICATION (REQUIRED)
TIP SHAPE OPTIONAL
G
W
J
IDENTIFICATION TAB
H
L
D
A
C
MARKING AREA (SEE TABLE IV)
HUB

STYLE B

APPROVED 10 JULY 1969 REVISED Ⓕ 18 AUGUST 1970

Ⓕ ENTIRE STANDARD REVISED

| | | |
|---|---|---|
| P.A.<br>NAVY - AS<br>Other Cust<br>USAF - 85<br>ARMY - EL | TITLE<br>STRAP, TIEDOWN, ELECTRICAL COMPONENTS, IDENTIFICATION, ADJUSTABLE, SELF-CLINCHING, PLASTIC, TYPE II, CLASS I | MILITARY STANDARD<br>MS3368 |
| PROCUREMENT SPECIFICATION<br>MIL-S-23190 | SUPERSEDES<br>MS17822 AND MS18035 | SHEET 1 OF 5 |

DD FORM 1 MAR 77 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. (PROJECT NO. 5975-0548)

FED. SUP CLASS
5975

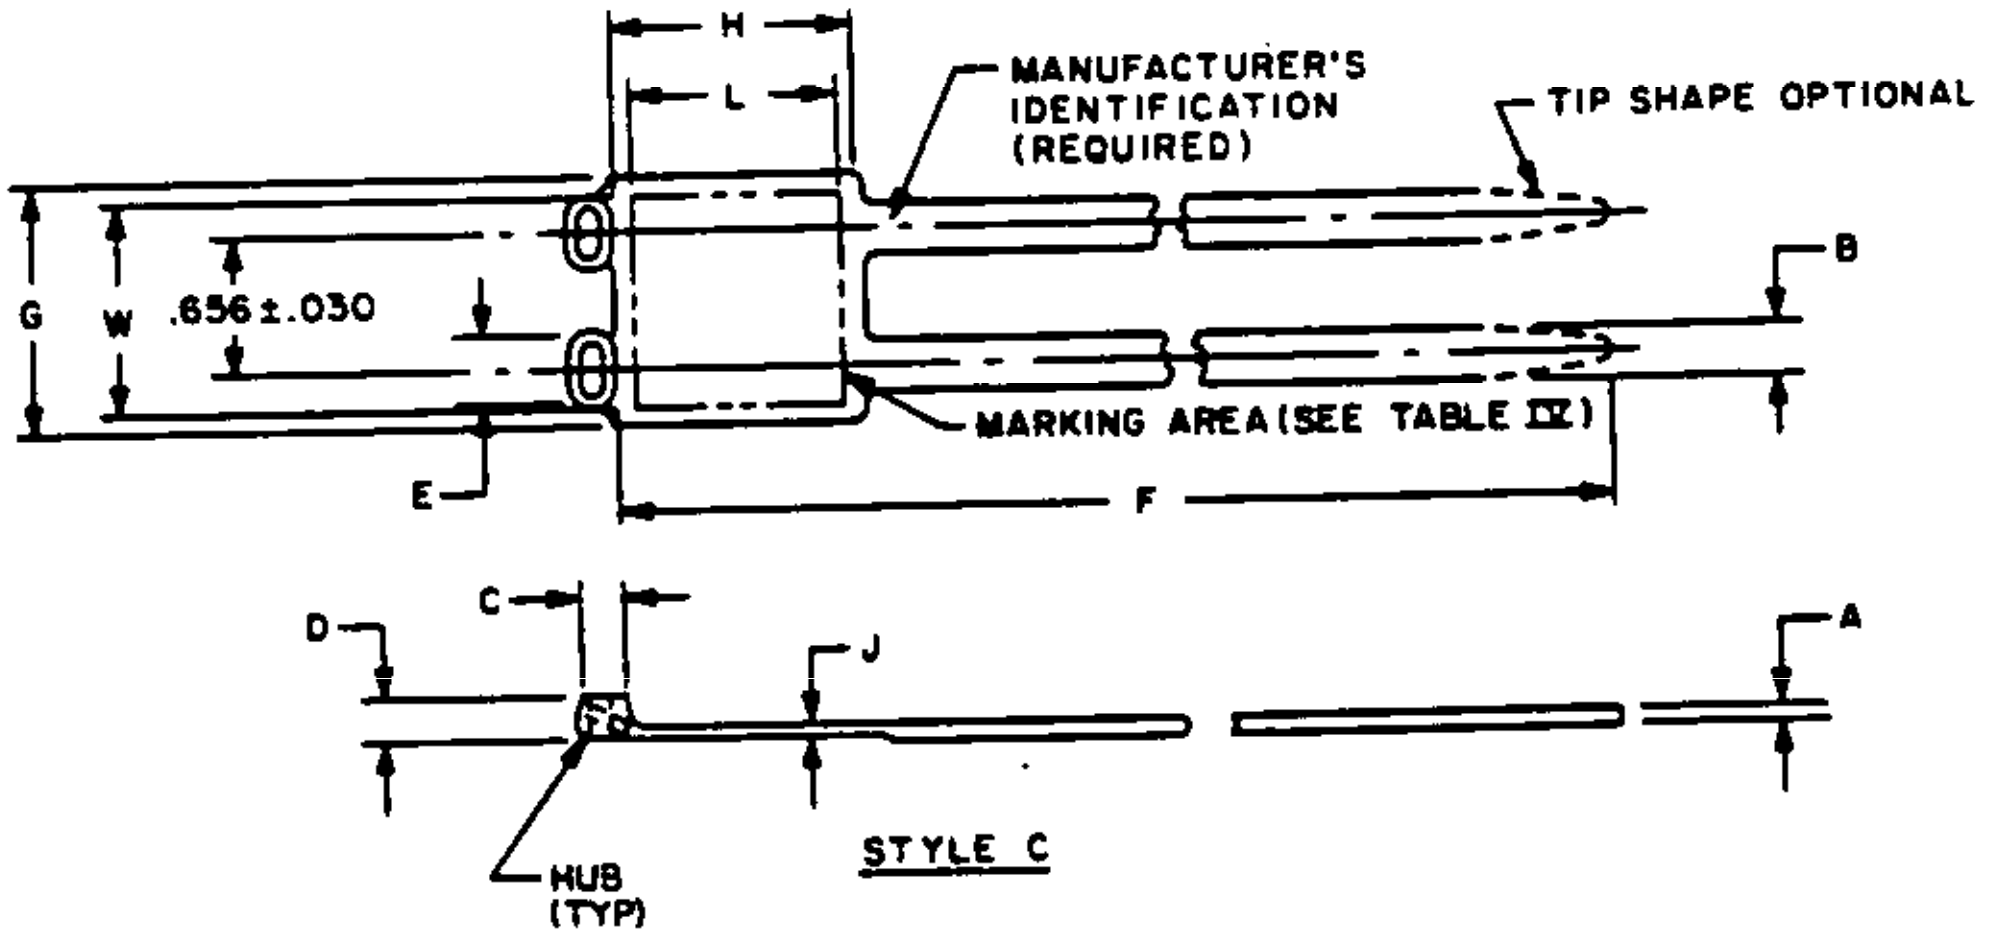
H
L
MANUFACTURER'S IDENTIFICATION (REQUIRED)
TIP SHAPE OPTIONAL
G
W
.656 ± .030
B
MARKING AREA (SEE TABLE IV)
E
F
C
D
J
A
HUB (TYP)

STYLE C

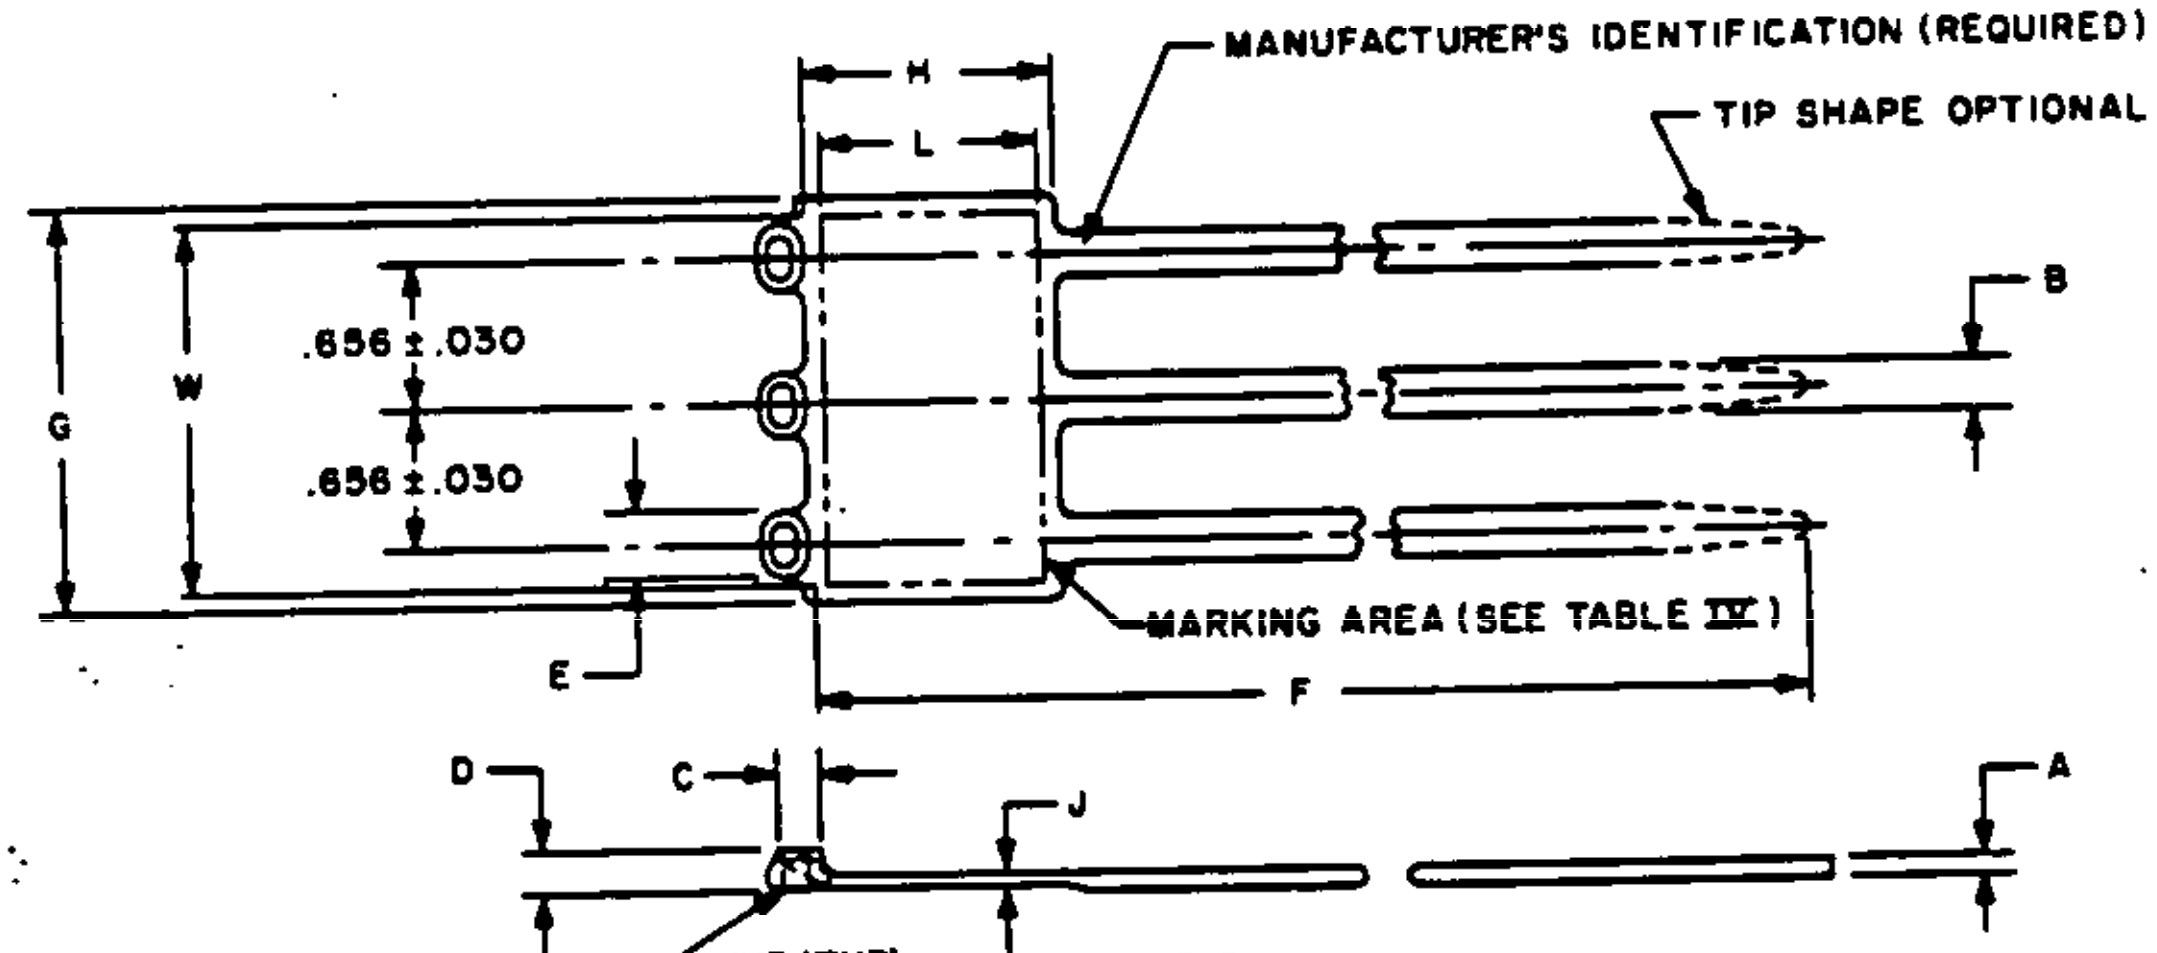
MANUFACTURER'S IDENTIFICATION (REQUIRED)
H
L
TIP SHAPE OPTIONAL
.656 ± .030
B
G
W
.656 ± .030
E
MARKING AREA (SEE TABLE IV)
F
D
C
J
A
HUB (TYP)

STYLE D

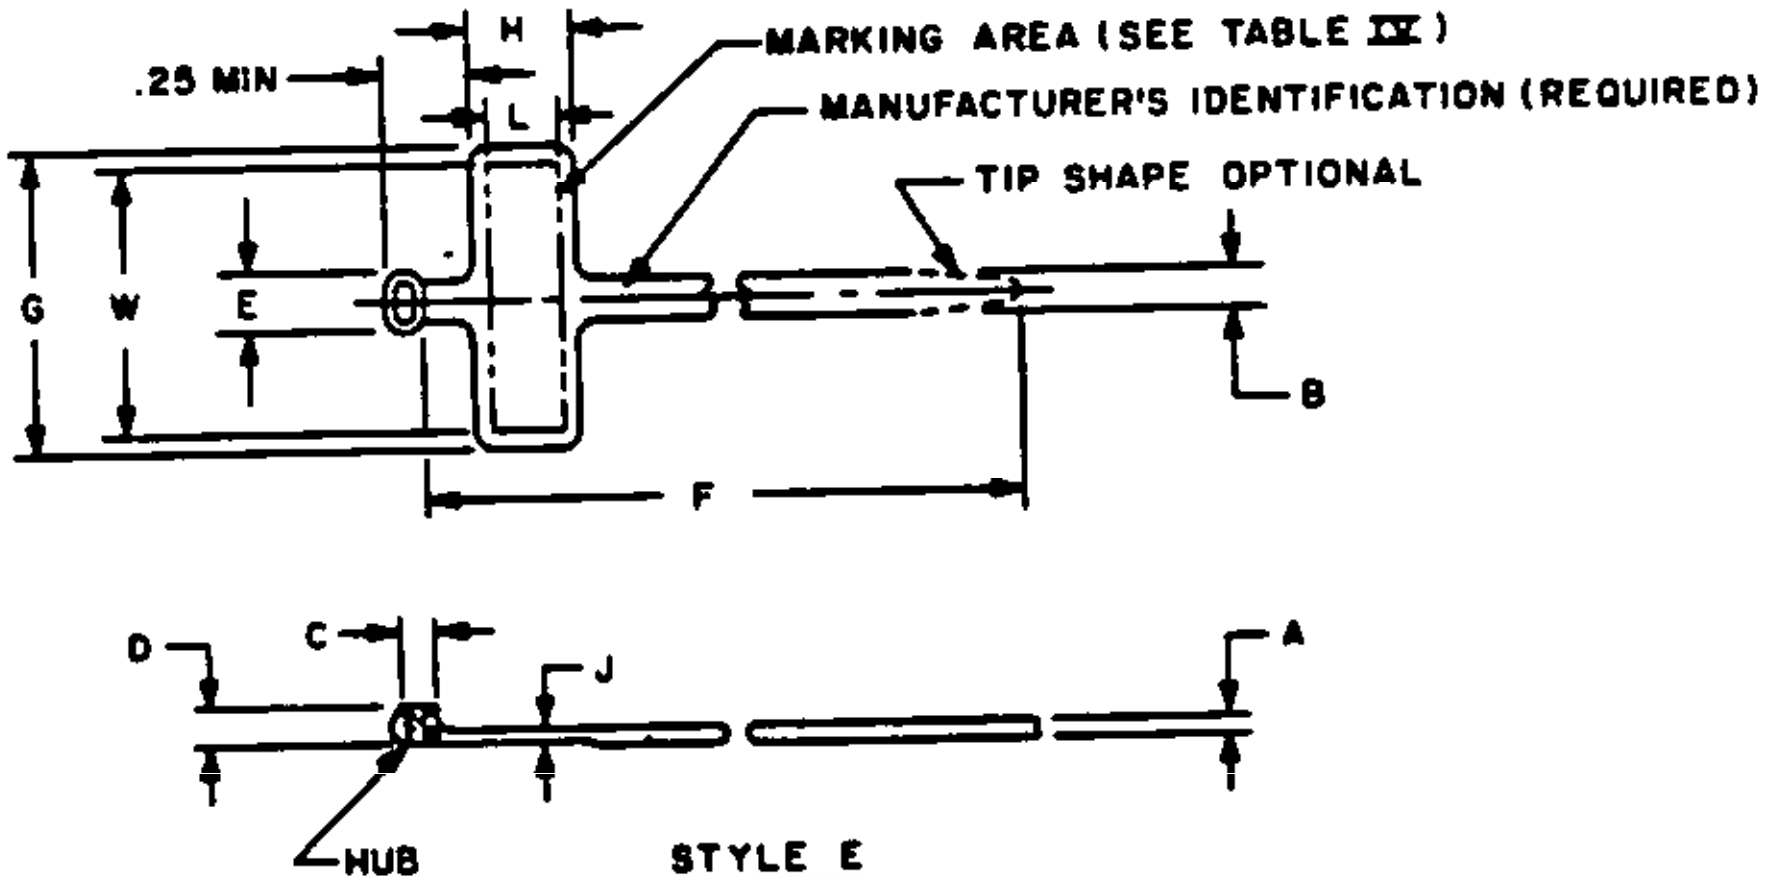
H
MARKING AREA (SEE TABLE IV)
.25 MIN
MANUFACTURER'S IDENTIFICATION (REQUIRED)
L
TIP SHAPE OPTIONAL
G
W
E
B
F
D
C
J
A
HUB

STYLE E

APPROVED 10 JULY 1969 REVISED (F) FOR CHANGES SEE SHEETS 1 THRU 5

Custodians:
ARMY -
NAVY - SH, OS
USAF - 17

Review activities:
ARMY - AV, MI, EL
NAVY - EC
USAF - 99

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

| | | |
|---|---|---|
| P.A.<br>NAVY - AS<br>Other Cust<br>USAF - 85<br>ARMY - EL | TITLE<br>STRAP, TIEDOWN, ELECTRICAL COMPONENTS, IDENTIFICATION, ADJUSTABLE, SELF-CLINCHING, PLASTIC, TYPE II, CLASS I | MILITARY STANDARD<br>MS3368 |
| PROCUREMENT SPECIFICATION<br>MIL-S-23190 | SUPERSEDES<br>MS17822 AND MS18035 | SHEET 2 OF 5 |

PLATE NO 23005

DD FORM 1 MAR 71 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USED SYMBOLS:
ARMY -
NAVY - SH, OS
USAF - 17

REVIEWED SYMBOLS:
ARMY - AV, MI, EL
NAVY - EC
USAF - 99

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

FED. SUP CLASS
5975

TABLE I

STYLE A, B, C, D & E

| DASH NUMBER | STYLE | BUNDLE DIA. INCH | | A MAX | B MAX | C MAX | D MAX | E MAX | F MIN | G MIN | H MAX | J MAX | MIN. TENSILE STRENGTH LB. | STRAP IDENTI-FICATION CODE SEE NOTE 11 | MS INSTAL-LATION TOOL | TOOL TENSION SETTING RANGE SEE NOTES 7 & 12 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | MIN. | MAX. | | | | | | | | | | | | | |
| -1 | A & B | 3/8 (See Note 4) | 1-3/4 | .055 | .190 | .275 | .240 | .425 | 6.30 | .50 | 1.125 1/ | .035 | 50 | STD (Standard) | MS90387-1 | 6 to 8 |
| -2 | A & B | 3/4 (See Note 4) | 4 | .055 | .190 | .275 | .240 | .425 | 13.35 | .50 | 2.312 | .048 | 50 | STD (Standard) | MS90387-1 | 6 to 8 |
| -3 | C | 3/8 | 1-3/4 | .055 | .190 | .275 | .240 | .425 | 6.30 | 1.12 | 1.125 | .035 | 50 (See Note 8) | STD (Standard) | MS90387-1 | 6 to 8 |
| -4 | D | 3/8 | 1-3/4 | .055 | .190 | .275 | .240 | .425 | 6.30 | 1.78 | 1.125 | .035 | 50 (See Note 8) | STD (Standard) | MS90387-1 | 6 to 8 |
| -5 | E | 3/16 | 5/8 | .046 | .100 | .175 | .170 | .200 | 2.72 | .96 | .34 | .035 | 18 | MIN (Miniature) | MS90387-1 | 1 to 3 |

1/ FOR DASH 1, STYLE B, THE "H" DIMENSION SHALL BE 1.187 MAX IN LIEU OF 1.125.

TABLE II

| COLOR DASH NO. | COLOR | COLOR DASH NO. | COLOR |
|---|---|---|---|
| -0 | BLACK 2/ | -5 | GREEN |
| -1 | BROWN | -6 | BLUE |
| -2 | RED | -7 | PURPLE |
| -3 | ORANGE | -8 | GRAY |
| -4 | YELLOW | -9 | NATURAL |

2/ SEE REQUIREMENTS: 1. (c) (1)

TABLE III

| SUPERSESSION BY PART NUMBER | | |
|---|---|---|
| PART NO. | PART NO. | PART NO. |
| MS3368-1 | MS17822-1 | MS18035-1 |
| MS3368-2 | MS17822-2 | MS18035-2 |
| MS3368-3 | ------ | MS18035-3 |
| MS3368-4 | ------ | MS18035-4 |
| MS3368-5 | ------ | MS18035-5 |

TABLE IV

| DASH NO. | STYLE | MARKING AREA | |
|---|---|---|---|
| | | L MIN. | W MIN. |
| 1 | A | .85 | .41 |
| 1 | B | .96 | .42 |
| 2 | A | 1.93 | .41 |
| 2 | B | .96 | .42 |
| 3 | C | .87 | 1.07 |
| 4 | D | .87 | 1.75 |
| 5 | E | .24 | .91 |

APPROVED 10 JULY 1969 REVISED (F) FOR CHANGES SEE SHEETS 1 THRU 5

| | | |
|---|---|---|
| P.A.<br>NAVY - AS<br>Other Cust<br>USAF - 85<br>ARMY - EL | TITLE<br>STRAP, TIEDOWN, ELECTRICAL COMPONENTS, IDENTIFICATION, ADJUSTABLE, SELF-CLINCHING, PLASTIC, TYPE II, CLASS 1 | MILITARY STANDARD<br>MS3368 |
| PROCUREMENT SPECIFICATION<br>MIL-S-23190 | SUPERSEDES<br>MS17822 AND MS18035 | SHEET 3 OF 5 |

DD FORM 1 MAR 77 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO [illegible]

FED. SUP CLASS
5975

USER SYMBOLS:
ARMY -
NAVY - SH, OS
USAF - 17

REVIEWER SYMBOLS:
ARMY - AV, MI, EL
NAVY - EC
USAF - 99

"Review/User information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

| INCH | mm | INCH | mm | INCH | mm | INCH | mm |
|---|---|---|---|---|---|---|---|
| .030 | 0.76 | .190 | 4.83 | .500 | 12.70 | 1.125 | 28.58 |
| .035 | 0.89 | .200 | 5.08 | .625 | 15.88 | 1.187 | 30.15 |
| .046 | 1.17 | .24 | 6.10 | .656 | 16.66 | 1.750 | 44.45 |
| .048 | 1.22 | .25 | 6.35 | .750 | 19.05 | 1.780 | 45.21 |
| .055 | 1.40 | .275 | 6.99 | .850 | 21.59 | 1.930 | 49.02 |
| .0625 | 1.59 | .34 | 8.64 | .870 | 22.10 | 2.312 | 58.72 |
| .100 | 2.54 | .375 | 9.53 | .910 | 23.11 | 2.720 | 69.09 |
| .170 | 4.32 | .41 | 10.41 | .960 | 24.38 | 4.000 | 101.60 |
| .175 | 4.45 | .42 | 10.67 | 1.070 | 27.18 | 6.300 | 160.02 |
| .1875 | 4.76 | .425 | 10.80 | 1.120 | 28.45 | 13.350 | 339.09 |

**REQUIREMENTS:**

1. MATERIAL: (a) STRAP: NYLON, PER MIL-M-20693, TYPE I, OR TYPE III, EXCEPT FOR BLACK WHICH SHALL BE TYPE II (WEATHER RESISTANT).

(b) STRAP LOCK: (1) METAL TYPE PER QQ-S-766, CLASS 301 AND 302 (SEE NOTE 5).

(2) PLASTIC TYPE PER MIL-M-20693, TYPE I EXCEPT FOR BLACK WHICH SHALL BE TYPE II (WEATHER RESISTANT) (SEE NOTE 5).

(c) COLOR: (1) COLORS IN ACCORDANCE WITH MIL-STD-104, EXCEPT NATURAL AND BLACK.

(2) A CONTRASTING COLOR SHALL BE USED WHEN MARKING IDENTIFICATION CABLE STRAP IN "MARKING" AREA.

**NOTES:**

1. DIMENSIONS ARE IN INCHES.
2. STRAPS SHALL HAVE NO BURRS, SHARP EDGES OR SHARP CORNERS.
3. METRIC EQUIVALENTS (TO THE NEAREST .01 mm) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 mm.
4. WHEN IDENTIFICATION TAB FOR THE STYLE B DESIGN IS IN THE "FLAG" POSITION, MINIMUM BUNDLE DIAMETER MAY BE 1/16.
5. LOCKING DEVICES OF ANY DESIGN ARE ACCEPTABLE PROVIDED THEY MEET PERFORMANCE REQUIREMENTS OF THE PROCUREMENT SPECIFICATION. WHEN METAL LOCKING DEVICES ARE USED, THEY MUST BE SECURELY ANCHORED AND SHALL NOT BE EXPOSED OUTSIDE OF THE HUB OR HUBS.
6. THE GOVERNMENT HAS A ROYALTY FREE LICENSE UNDER THE FOLLOWING U.S. PATENT AND U.S. PATENT APPLICATION NUMBERS 3,022,557; 173,866; 3,186,047; FOR THE BENEFIT OF MANUFACTURERS OF THE ITEMS CALLED FOR IN THIS STANDARD EITHER FOR THE GOVERNMENT OR FOR USE IN EQUIPMENT TO BE DELIVERED TO THE GOVERNMENT.
7. TYPE II TIEDOWN STRAPS MAY BE USED ON WIRE BUNDLES CONTAINING SOLID DIELECTRIC COAXIAL CABLES PROVIDED THAT THE TENSION SETTING ON THE MS90387 INSTALLING TOOL IS NOT GREATER THAN THAT REQUIRED TO PREVENT AXIAL SLIPPAGE.
8. MINIMUM TENSILE STRENGTH APPLIES TO EACH LEG OF STRAP.
9. CONTOUR INDICATED BY PHANTOM LINES MAY VARY FROM THAT SHOWN TO SUIT INDIVIDUAL MANUFACTURER'S DESIGN. SLIGHT MOLDING TAPER IS PERMITTED.
10. EXAMPLE OF PART NUMBER:

MS3368-1-9A
A — STYLE
9 — COLOR DASH NO.
1 — DASH NO.
MS3368 — BASIC PART NO.

APPROVED 10 JULY 1969    REVISED (F) FOR CHANGES SEE SHEETS 1 THRU 5

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.
NAVY - AS
Other Cust
USAF - 85
ARMY - EL

TITLE
STRAP, TIEDOWN, ELECTRICAL COMPONENTS, IDENTIFICATION, ADJUSTABLE, SELF-CLINCHING, PLASTIC, TYPE II, CLASS 1

MILITARY STANDARD
MS3368

SHEET 4 OF 5

PROCUREMENT SPECIFICATION
MIL-S-23190

SUPERSEDES
MS17822 AND MS18035

PLATE NO 23884

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITION OF THIS FORM ARE OBSOLETE

USER SYMBOLS:
ARMY -
NAVY - SH, OS
USAF - 17

REVIEWER SYMBOLS:
ARMY - AV, MI, EL
NAVY - EC
USAF - 99

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Deviations for all new engineering and design applications and for repetitive use shall be made from this document

FED. SUP CLASS
5975

11. UNIT PACKAGE MARKING - IN ADDITION TO THE PART NUMBER SHOWN IN NOTE 10, THE UNIT PACKAGE SHALL HAVE THE FOLLOWING TYPICAL INFORMATION MARKED ON THE PACKAGE OR CONTAINED WITHIN THE PACKAGE

EXAMPLE

STRAP IDENTIFICATION CODE - STANDARD
MS INSTALLATION TOOL - 90387-1
TOOL TENSION SETTING RANGE - 6 TO 8

12. TOOL TENSION SETTING - THE TOOL TENSION SETTING RANGES SPECIFIED IN TABLE I ARE FOR TYPICAL WIRE BUNDLE APPLICATIONS. SETTINGS LESS OR GREATER THAN THE RANGES SPECIFIED MAY BE NECESSARY FOR SPECIAL APPLICATIONS.

13. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

14. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

APPROVED 10 JULY 1969 REVISED Ⓕ FOR CHANGES SEE SHEETS 1 THRU 5

| | | |
|---|---|---|
| P.A.<br>NAVY - AS<br>Other Cust<br>USAF - 85<br>ARMY - EL | TITLE<br>STRAP, TIEDOWN, ELECTRICAL COMPONENTS, IDENTIFICATION, ADJUSTABLE, SELF - CLINCHING, PLASTIC, TYPE II, CLASS I | **MILITARY STANDARD**<br>**MS3368** |
| PROCUREMENT SPECIFICATION<br>MIL-S-23190 | SUPERSEDES<br>MS17822 AND MS18053 | SHEET 5 OF 5 |

PLATE NO [illegible]

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

U.S. GOVERNMENT PRINTING OFFICE: 1981-703-023/7046

Source: https://assist.dla.mil -- Downloaded: [illegible]
Check the source to verify that this is the current version before use.