FED. SUP CLASS 5305

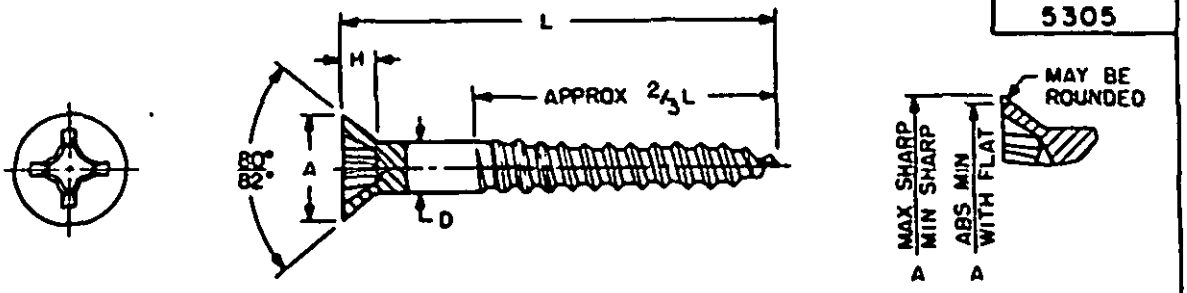


TABLE I

NOMINAL SIZE		2	3*	4	5*	6	7*	8	9*	10	12	14	16
D SCREW DIA	BASIC	.086	.099	.112	.125	.138	.151	.164	.177	.190	.216	.242	.268
	MAX	.090	.103	.116	.129	.142	.155	.168	.181	.194	.220	.246	.272
	MIN	.079	.092	.105	.118	.131	.144	.157	.170	.183	.209	.235	.261
A HEAD DIA	MAX SHARP	.172	.199	.225	.252	.279	.305	.332	.358	.385	.438	.491	.544
	MIN SHARP	.156	.181	.207	.232	.257	.283	.308	.334	.359	.410	.461	.512
	ABS MIN	.147	.171	.195	.220	.244	.268	.292	.316	.340	.389	.437	.485
H HEAD HEIGHT	REF	.051	.059	.067	.075	.083	.091	.100	.108	.116	.132	.148	.164
DRIVER SIZE		1	1	1	2	2	2	2	2	3	3	3	3
THREADS PER INCH		26	24	22	20	18	16	15	14	13	11	10	9

(E) * Inactive, see sheet 2.

NOTES:

1. MATERIAL: Carbon steel, 1010 thru 1022 or 1108 thru 1118 in accordance with QQ-S-631, QQ-S-634, QQ-S-637 or QQ-W-403.
   (E) Brass, alloy no. 260 or 268, quarter-hard in accordance with QQ-B-613 or QQ-B-626; or alloy no. 260 or 270, quarter-hard in accordance with QQ-W-321.
2. PROTECTIVE COATING: Steel - Cadmium plated in accordance with QQ-P-416, Type II, Class 3 or MIL-C-81562, Type II, Class 3; or zinc coated in accordance with QQ-Z-325, Type II, Class 3 or MIL-C-81562, Type II, Class 3.
   (E) Brass - Plain, uncoated.
3. THREADS: Maximum permissible variation in number of threads per inch shall be plus or minus 10 percent.
4. RECESS: The recess shall be in accordance with MS9006.
5. DIMENSIONS: All dimensions are in inches.
6. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35492-8.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

(E) FOR CHANGES SEE SHEETS 1 AND 2.

REVIEWER: AV, EA, IS, NI, AT, MC, ME, MU, PA, SH, VT
USER:

APPROVED 4 DEC 1956 REVISED (A) 18 OCT 1965 (B) 1 JUN 1967 (C) 20 MAY 1968 (D) 26 NOV 1968 (E) 15 AUG 1974

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	MC
Other Cust	YD 82

TITLE: SCREW, WOOD, FLAT HEAD, CROSS-RECESSED, STEEL AND BRASS

MILITARY STANDARD
MS 35492

PROCUREMENT SPECIFICATION: FF-S-111

SUPERSEDES: AN530 in part and FSD11.1, 1.2, 3.1, 3.2, 5, 5.1, 5.2, 7, 7.1, and 7.2

SHEET 1 OF 3

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:24Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

TABLE II

STEEL, CADMIUM OR ZINC PLATED

NOMINAL SIZE		2	3	4	5	6	7	8	9	10	12	14	16
L LENGTH	TOL	DASH NO.	DASH NO.*	DASH NO.	DASH NO.*	DASH NO.	DASH NO.*	DASH NO.	DASH NO.*	DASH NO.	DASH NO.	DASH NO.	DASH NO.
.25	+.00	901	1	8									
.38	-.03	902	2	9	18	27		49					
.50		903	3	10	19	28	39	50		74			
.62		904	4	11	20	29	40	51		75	89		
.75	+.00	905	5	12	21	30	41	52	64	76	90	103	
.88	-.05		6	13	22	31	42	53	65	77	91	104	
1.00			7	14	23	32	43	54	66	78	92	105	117
1.25				15		33	44	55	67	79	93	106	118
1.50				16		34	45	56	68	80	94	107	119
1.75	+.00					35		57	69	81	95	108	120
2.00	-.06					36		58	70	82	96	109	121
2.25						37		59	71	83	97	110	122
2.50						38		60	72	84	98	111	123
2.75								61		85	99	112	124
3.00	+.00							910		86	100	113	125
3.50	-.09									87	101	114	126
4.00											102	115	127
4.50												116	128
5.00												911	129

REVIEWER: AV, EA, IS, MI
USER: AT, MC, ME, MU, PA, SH, WT

TABLE III

BRASS, PLAIN, UNCOATED

NOMINAL SIZE		2	3	4	5	6	7	8	9	10	12	14	
L LENGTH	TOL	DASH NO.	DASH NO.*	DASH NO.	DASH NO.*	DASH NO.	DASH NO.*	DASH NO.	DASH NO.*	DASH NO.	DASH NO.	DASH NO.	
.25	+.00	920	201	208									
.38	-.03	921	202	209	218	227							
.50		922	203	210	219	228	239	249					
.62		923	204	211	220	229	240	250		271			
.75	+.00	924	205	212	221	230	241	251	261	272	283		
.88	-.05			213	222	231	242	252	262	273	284		
1.00				214	223	232	243	253	263	274	285	295	
1.25						233	244	254	264	275	286	296	
1.50						234	245	255	265	276	287	297	
1.75	+.00							256	266	277	288	298	
2.00	-.06							257	267	278	289	299	
2.25										279	290		
2.50										280	291	301	
3.00	+.00										293	303	
3.50	-.09										294		

* NOTE: (E) Crossed-out dash numbers (sizes 3, 5, 7 and 9) are INACTIVE FOR NEW DESIGN AFTER 15 August 1974.

INTERCHANGEABILITY

Steel, cadmium plated screws covered by dash numbers 501 thru 625 given in revision A of this standard are canceled after 1 June 1967. Brass, black oxide coated screws covered by dash numbers 701 thru 803 given in revision B of this standard and screws covered on AN550 in part are canceled after 20 May 1968. The canceled screws should be used for maintenance purposes until existing stocks are depleted. Use only the superseding screws for new design and engineering. Replacement shall be in accordance with Table IV (see sheet 3).

APPROVED 4 DEC 1956 REVISED (D) 26 NOV 1968 (E) FOR CHANGES SEE SHEETS 1 AND 2.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust YD 82	TITLE SCREW, WOOD, FLAT HEAD, CROSS-RECESSED, STEEL AND BRASS	MILITARY STANDARD MS 35492
PROCUREMENT SPECIFICATION FF-S-111	SUPERSEDES: AN550 in part and BQDX1.1, 1.2, 3.1, 3.2, 5, 5.1, 5.2, 7, 7.1 and 7.2	SHEET 2 OF 3

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:24Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

TABLE IV - INTERCHANGEABILITY

PART NUMBER	
CANCELED	SUPSD BY
MS35492	MS35492
501	1
502	2
503	3
504	4
508	8
509	9
510	10
511	11
512	12
513	13
514	14
518	18
519	19
520	20
521	21
522	22
523	23
527	27
528	28
529	29
530	30
531	31
532	32
533	33
534	34
539	39
540	40
541	41
542	42
543	43
544	44
545	45
550	50
551	51
552	52
553	53
554	54
555	55
556	56
557	57
558	58
560	60
564	64
565	65
566	66
567	67
568	68
569	69
570	70
572	72
576	76
577	77
578	78
579	79
580	80
581	81
582	82
583	83
584	84
586	86
590	90
591	91
592	92
593	93
594	94
595	95

PART NUMBER	
CANCELED	SUPSD BY
MS35492	MS35492
596	96
597	97
598	98
600	100
605	105
606	106
607	107
608	108
609	109
610	110
611	111
613	113
617	117
618	118
619	119
620	120
621	121
622	122
623	123
625	125
701	201
702	202
703	203
708	208
709	209
710	210
711	211
712	212
713	213
714	214
718	218
719	219
720	220
721	221
722	222
723	223
727	227
728	228
729	229
730	230
731	231
732	232
733	233
734	234
739	239
740	240
741	241
742	242
743	243
744	244
745	245
749	249
750	250
751	251
752	252
753	253
754	254
755	255
756	256
757	257
761	261
762	262
763	263
764	264
765	265
766	266

PART NUMBER	
CANCELED	SUPSD BY
MS35492	MS35492
767	267
772	272
773	273
774	274
775	275
776	276
777	277
778	278
780	280
785	285
786	286
787	287
788	288
789	289
791	291
793	293
795	295
796	296
797	297
798	298
799	299
801	301
803	303

AN550	MS35492
2R2	901
2R3	902
2R4	903
2R5	904
2R6	905
3R3	2
3R4	3
3R5	4
3R6	5
3R7	6
3R8	7
4R2	8
4R3	9
4R4	10
4R5	11
4R6	12
4R7	13
4R8	14
4R10	15
4R12	16
5R3	18
5R4	19
5R5	20
5R6	21
5R7	22
5R8	23
6R3	27
6R4	28
6R5	29
6R6	30
6R7	31
6R8	32
6R10	33
6R12	34
6R14	35
6R16	36

PART NUMBER	
CANCELED	SUPSD BY
AN550	MS35492
6R18	37
6R20	38
8R1	49
8R4	50
8R5	51
8R6	52
8R7	53
8R8	54
8R10	55
8R12	56
8R14	57
8R16	58
8R18	59
8R20	60
8R24	61
8R28	910
10R4	74
10R5	75
10R6	76
10R7	77
10R8	78
10R10	79
10R12	80
10R14	81
10R16	82
10R18	83
10R20	84
10R22	85
10R24	86
10R28	87
12R5	89
12R6	90
12R7	91
12R9	92
12R10	93
12R12	94
12R14	95
12R16	96
12R18	97
12R20	98
12R22	99
12R24	100
12R28	101
12R32	102
14R6	103
14R7	104
14R8	105
14R10	106
14R12	107
14R14	108
14R16	109
14R18	110
14R20	111
14R22	112
14R24	113
14R28	114
14R32	115
14R36	116
14R40	911
16R8	117
16R10	118
16R12	119
16R14	120
16R16	121
16R18	122
16R20	123

PART NUMBER	
CANCELED	SUPSD BY
AN550	MS35492
16R22	124
16R24	125
16R28	126
16R32	127
16R36	128
16R40	129
B2R2	920
B2R3	921
B2R4	922
B2R5	923
B2R6	924
B3R3	202
B3R4	203
B3R5	204
B3R6	205
B4R2	208
B4R3	209
B4R4	210
B4R5	211
B4R6	212
B4R7	213
B4R8	214
B5R3	218
B5R4	219
B5R5	220
B5R6	221
B5R7	222
B5R8	223
B6R3	227
B6R4	228
B6R5	229
B6R6	230
B6R7	231
B6R8	232
B6R10	233
B6R12	234
B8R4	249
B8R5	250
B8R6	251
B8R7	252
B8R8	253
B8R10	254
B8R12	255
B8R14	256
B8R16	257
B10R5	271
B10R6	272
B10R7	273
B10R8	274
B10R10	275
B10R12	276
B10R14	277
B10R16	278
B10R18	279
B10R20	280
B12R6	283
B12R7	284
B12R8	285
B12R10	286
B12R12	287
B12R14	288
B12R16	289
B12R18	290
B12R20	291
B12R24	293
B12R28	294

REVIEWER: AV, EA, IS, NI
USER: AT, MC, ME, MU, PA, SH, WT

APPROVED 4 DEC 1956 REVISED (O) 26 NOV 1960 (E) FOR CHANGES SEE SHEETS 1 AND 2.

tary standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. GC
Other Cust YD
82

TITLE
SCREW, WOOD, FLAT HEAD, CROSS-RECESSED, STEEL AND BRASS

MILITARY STANDARD
MS 35492

PROCUREMENT SPECIFICATION
FF-S-111

SUPERSEDES: AN550 in part and BQDX1.1, 1.2, 3.1, 3.2, 5, 5.1, 5.2, 7, 9.1 and 7.2

SHEET 3 OF 3

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:24Z
Check the source to verify that this is the current version before use.