FED. SUP CLASS
4730

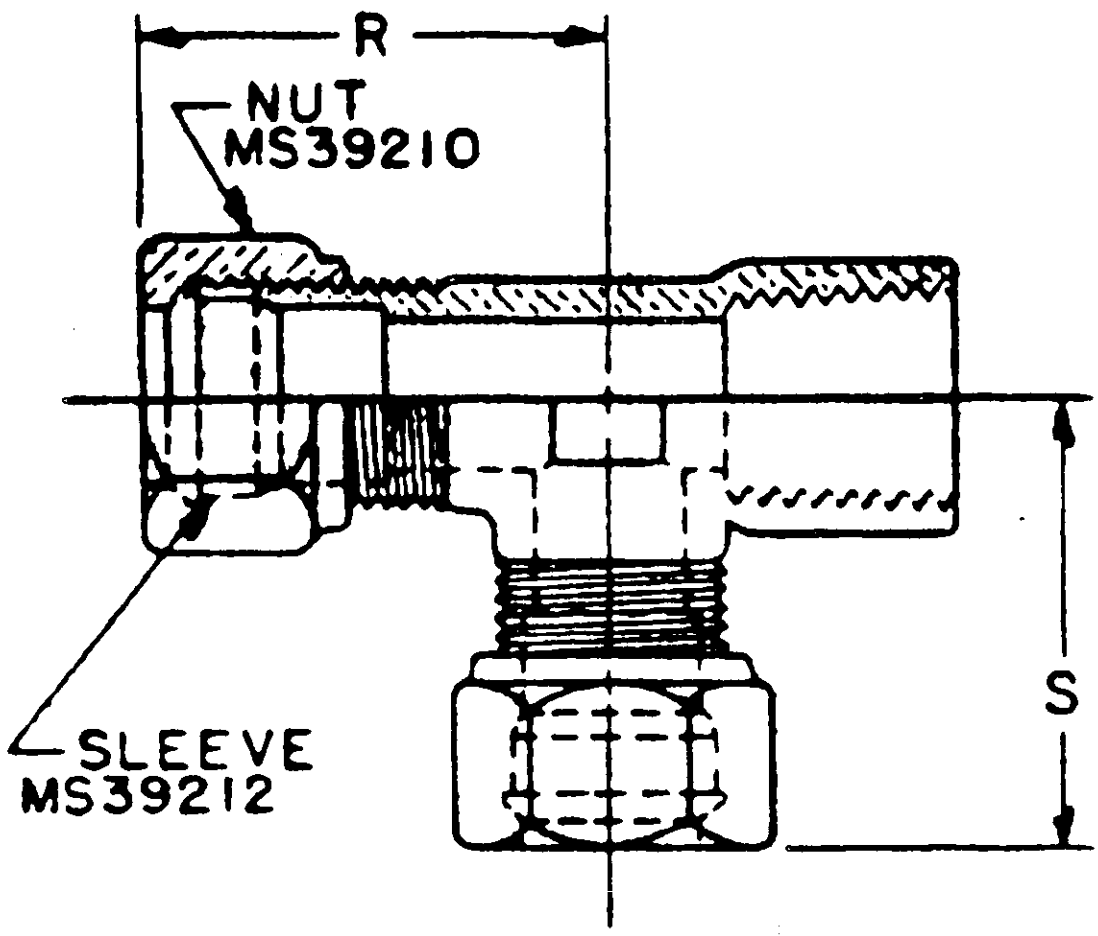

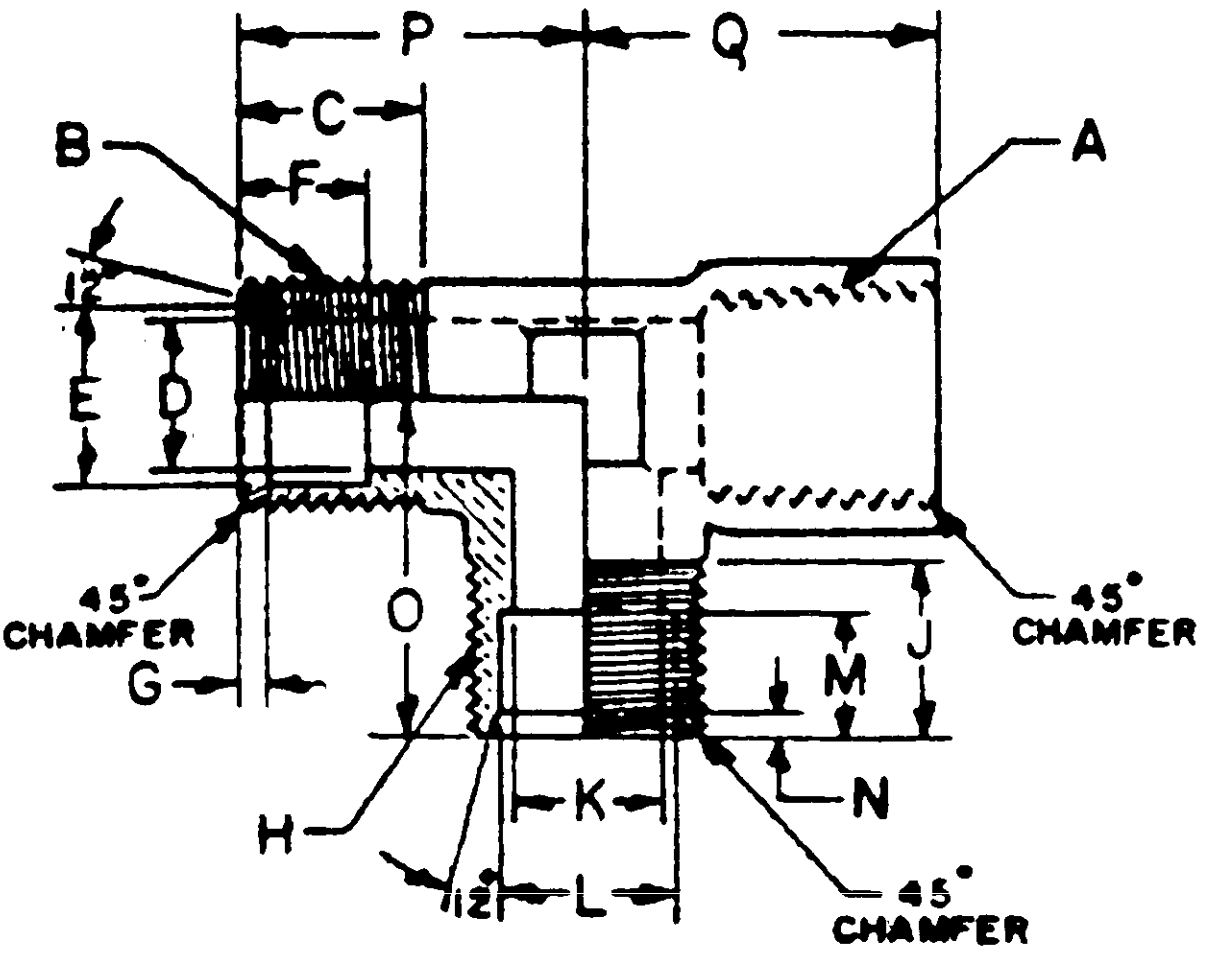

DETAIL OF BODY

DASH NO.	TUBE O.D.		A PIPE THREADS NPTF	B	C THREAD LENGTH	D	E	F	G	H	J	K	L	M	N
1	1/8	1/8	1/8	5/16-24UNF-2A	9/32	3/32	.135 .139	13/64	1/8	5/16-24UNF-2A	9/32	3/32	.135 .139	13/64	1/8
2	3/16	3/16	1/8	3/8 -24UNF-2A	9/32	1/8	.196 .200	1/4	5/32	3/8 -24UNF-2A	9/32	1/8	.196 .200	1/4	5/32
3	1/4	1/4	1/8	1/2 -20UNF-2A	13/32	13/64	.261 .265	19/64	13/64	1/2 -20UNF-2A	13/32	13/64	.261 .265	19/64	13/64
4	5/16	5/16	1/8	9/16-18UNF-2A	13/32	13/64	.324 .328	19/64	13/64	9/16-18UNF-2A	13/32	13/64	.324 .328	19/64	13/64
5	3/8	3/8	1/4	5/8 -18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	5/8 -18UNF-2A	7/16	9/32	.386 .390	19/64	13/64
6	1/2	1/2	3/8	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64
7	5/8	5/8	1/2	15/16-16UN-2A	15/32	1/2	.641 .645	11/32	15/64	15/16-16UN-2A	15/32	1/2	.641 .645	11/32	15/64
8	3/4	3/4	3/4	1 1/16-16UN-2A	15/32	21/32	.766 .770	11/32	13/64	1 1/16-16UN-2A	15/32	21/32	.766 .770	11/32	13/64

DASH NO.	O	P	Q	R	S
1	23/32	23/32	5/8	1 1/32	1 1/32
2	23/32	23/32	5/8	1 1/16	1 1/16
3	25/32	25/32	11/16	1 3/16	1 3/16
4	13/16	13/16	11/16	1 3/16	1 3/16
5	1	1	7/8	1 7/16	1 7/16
6	1 3/16	1 3/16	15/16	1 23/32	1 23/32
7	1 5/16	1 5/16	1 3/16	1 27/32	1 27/32
8	1 1/2	1 1/2	1 3/8	2 3/32	2 3/32

Ⓔ
INACTIVE FOR NEW DESIGN. USE FOR MAINTENANCE PURPOSES ONLY. FOR NEW DESIGN USE MS51822.

APPROVED 24 APRIL 1962 REVISED Ⓐ 29 DEC 67 Ⓑ 10 OCT 74 Ⓒ 3 FEB 75 Ⓓ 13 MAY 77 Ⓔ 26 FEB 82

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

P.A. ARMY-AT
Other Cust

TITLE
TEES, PIPE TO TUBE - SAFETY SLEEVE COMPRESSION
TYPE, FEMALE PIPE END

MILITARY STANDARD
MS39209(AT)

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES:

SHEET 1 OF 2

4730-A222

DD FORM 1 SEP 57 672-1 (Limited coordination)

FED. SUP CLASS
4730

DASH NO.	TUBE O.D.		A PIPE THREADS NPTF	B	C THREAD LENGTH	D	E	F	G	H	J	K	L	M	N
9	7/8	7/8	3/4	1 3/16-16UN-2A	15/32	23/32	.891 .895	11/32	13/64	1 3/16-16UN-2A	15/32	23/32	.891 .895	11/32	13/64
10	1	1	1	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64
11	1 1/4	1 1/4	1 1/4	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64
12	1 1/2	1 1/2	1 1/2	1 7/8 -16UN-2A	9/16	1 11/32	1.520 1.524	15/32	13/64	1 7/8 -16UN-2A	9/16	1 11/32	1.520 1.524	15/32	13/64

DASH NO.	O	P	Q	R	S
9	1 1/2	1 1/2	1 3/8	2 3/32	2 3/32
10	1 5/8	1 5/8	1 5/8	2 3/16	2 3/16
11	1 15/16	1 15/16	2	2 9/16	2 9/16
12	2 3/8	2 3/8	2 1/8	3 1/16	3 1/16

MATERIAL: STEEL, IN ACCORDANCE WITH FEDERAL STANDARD NO. 66, AISI-C-1112, C-1113, C-1117, C-1118 OR C-1137.

FINISH: CADMIUM PLATED, SPECIFICATION QQ-P-416, TYPE II, CLASS 3.

TOLERANCE: UNLESS OTHERWISE SPECIFIED, DECIMALS ± .005, FRACTIONS ± 1/64, DEGREES ± 2°.

THREADS: THE THREADS SHALL BE IN ACCORDANCE WITH MIL-STD-[illegible].

PART NUMBER: THE PART NUMBER CONSISTS OF MS NUMBER PLUS THE DASH NUMBER, EXAMPLE: MS 39209-1.

THE PART NUMBER COVERS THE COMPLETE ITEM (WITH NUTS AND SLEEVES).

NOTES: 1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

2. THIS ILLUSTRATION IS FOR IDENTIFICATION AND IS NOT INTENDED TO RESTRICT DESIGNS OR SHAPES NOT DIMENSIONED.

INACTIVE— SEE SHEET 1

APPROVED 24 APRIL 1962 REVISED

P.A. Other Cust	TITLE TEES, PIPE TO TUBE - SAFETY SLEEVE COMPRESSION TYPE, FEMALE PIPE END	MILITARY STANDARD MS39209(AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 MAY 57 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

NOTICE
OF VALIDATION

MS39209E(AT)
NOTICE 1
18 September 1987

MILITARY SPECIFICATION

TEES, PIPE TO TUBE-SAFETY SLEEVE COMPRESSION TYPE, FEMALE PIPE END

MS39209E(AT), dated 26 February 1982, has been reviewed and determined to be valid for maintenance purposes only.

Custodian:
Army - AT

Preparing activity:
Army - AT

AMSC N/A

FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.